

Exhibit A



US008948784B2

(12) **United States Patent**
Chan et al.

(10) **Patent No.:** **US 8,948,784 B2**
(45) **Date of Patent:** ***Feb. 3, 2015**

(54) **MONITORING GEOSPATIAL CONTEXT OF A MOBILE DEVICE**

(71) Applicant: **Aegis Mobility, Inc.**, Vancouver (CA)

(72) Inventors: **Mandy Chan**, Vancouver (CA); **Andrew S. Wright**, Vancouver (CA); **Peter A. Featherstone**, Vancouver (CA); **John J. Geyer**, Vancouver (CA); **Stephen J. Williams**, Port Coquitlam (CA)

(73) Assignee: **Aegis Mobility, Inc.**, Burnaby (CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **14/021,925**

(22) Filed: **Sep. 9, 2013**

(65) **Prior Publication Data**

US 2014/0011520 A1 Jan. 9, 2014

Related U.S. Application Data

(63) Continuation of application No. 12/040,818, filed on Feb. 29, 2008, now Pat. No. 8,532,667.

(60) Provisional application No. 60/892,628, filed on Mar. 2, 2007.

(51) **Int. Cl.**
H04W 64/00 (2009.01)
H04M 1/725 (2006.01)

(Continued)

(52) **U.S. Cl.**
CPC **H04M 1/72569** (2013.01); **H04W 4/02** (2013.01); **H04L 67/303** (2013.01);
(Continued)

(58) **Field of Classification Search**
USPC 455/456.1, 456.2, 456.3, 456.5, 456.6, 455/457

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,852,775 A 12/1998 Hidary
5,862,476 A 1/1999 Hasegawa

(Continued)

FOREIGN PATENT DOCUMENTS

CN 101087475 A 12/2007
CN 101369912 A 2/2009

(Continued)

OTHER PUBLICATIONS

Office Action issued in European Patent Application No. 09810968.9, dated Nov. 6, 2013.

Primary Examiner — Kamran Afshar


Assistant Examiner — Farideh Madani

(74) *Attorney, Agent, or Firm* — Knobbe, Martens, Olson & Bear, LLP

(57) **ABSTRACT**

Systems, methods and interfaces are disclosed for managing communications associated with a mobile communication device. Mobile communication devices process environmental inputs and transmit mobile communication device context information to a communication management system. The context information may, for example, reflect the motion and/or geographic location of the mobile device, and may reflect the risk associated with using the device to handle a call or other communications session. The communication management system uses the context information, optionally in combination with communication device profiles, to determine how to manage incoming and/or ongoing calls or other communication sessions. Mobile device users may also be inhibited from initiating communication sessions.

24 Claims, 26 Drawing Sheets

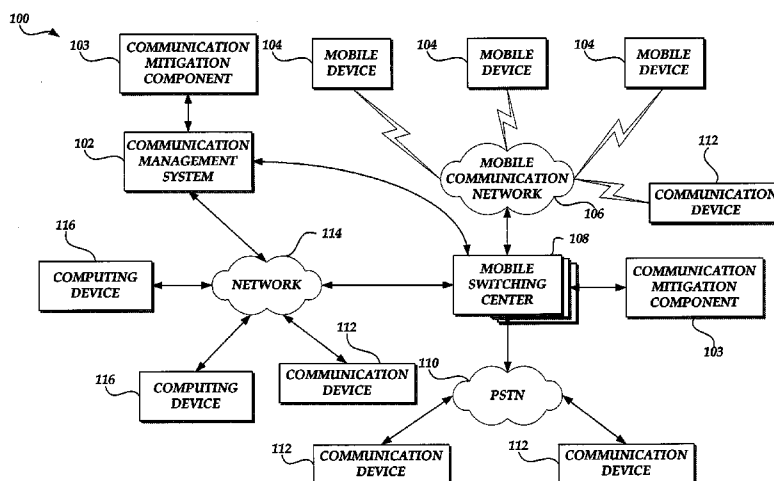

US 8,948,784 B2

Page 2


- (51) **Int. Cl.**
H04W 4/02 (2009.01)
H04L 29/08 (2006.01)
H04W 4/04 (2009.01)
H04W 52/02 (2009.01)
H04W 68/00 (2009.01)
H04W 8/18 (2009.01)
- (52) **U.S. Cl.**
 CPC *H04W 4/027* (2013.01); *H04W 4/046* (2013.01); *H04W 52/0251* (2013.01); *H04W 64/006* (2013.01); *H04M 1/72577* (2013.01); *H04W 68/00* (2013.01); *H04W 8/18* (2013.01)
 USPC 455/456.1; 455/456.2; 455/456.3; 455/456.4; 455/456.5; 455/456.6; 455/457
- (56) **References Cited**
- U.S. PATENT DOCUMENTS
- | | | | | | |
|----------------|---------|-----------------------|-------------------|---------|------------------------------------|
| 5,890,061 A | 3/1999 | Timm et al. | 7,330,895 B1 | 2/2008 | Horvitz |
| 5,890,067 A | 3/1999 | Chang et al. | 7,359,713 B1 | 4/2008 | Tiwari |
| 5,963,550 A | 10/1999 | Hirata et al. | 7,359,714 B2 | 4/2008 | Parupudi et al. |
| 6,108,532 A | 8/2000 | Matsuda et al. | 7,394,791 B2 | 7/2008 | Proctor, Jr. |
| 6,154,172 A | 11/2000 | Piccionelli et al. | 7,403,785 B2 | 7/2008 | Daniels et al. |
| 6,198,927 B1 | 3/2001 | Wright et al. | 7,430,724 B2 | 9/2008 | Othmer |
| 6,208,866 B1 | 3/2001 | Rouhollahzadeh et al. | 7,809,379 B2 | 10/2010 | Kim |
| 6,263,190 B1 | 7/2001 | Mamori et al. | 7,813,741 B2 | 10/2010 | Hendrey et al. |
| 6,311,078 B1 | 10/2001 | Hardouin | 7,979,057 B2 | 7/2011 | Ortiz et al. |
| 6,353,778 B1 | 3/2002 | Brown | 8,000,689 B2 | 8/2011 | Featherstone et al. |
| 6,380,176 B2 | 4/2002 | Takahashi et al. | 8,009,086 B2 * | 8/2011 | Grossnickle et al. 342/357.23 |
| 6,389,287 B1 | 5/2002 | Smith et al. | 8,045,976 B2 | 10/2011 | Kiddie et al. |
| 6,418,309 B1 | 7/2002 | Moon et al. | 8,055,279 B2 | 11/2011 | Murakami |
| 6,496,709 B2 | 12/2002 | Murray | 8,103,292 B2 | 1/2012 | Kelly et al. |
| 6,505,046 B1 | 1/2003 | Baker | 8,224,353 B2 | 7/2012 | Wright et al. |
| 6,526,275 B1 | 2/2003 | Calvert | 8,346,265 B2 | 1/2013 | Strub et al. |
| 6,546,257 B1 | 4/2003 | Stewart | 8,380,176 B2 | 2/2013 | Adler et al. |
| 6,580,973 B2 | 6/2003 | Leivian et al. | 8,483,710 B2 | 7/2013 | Casey et al. |
| 6,594,483 B2 | 7/2003 | Nykanen et al. | 8,526,942 B2 | 9/2013 | Kiddie et al. |
| 6,598,034 B1 | 7/2003 | Kloth et al. | 8,737,969 B2 * | 5/2014 | Singh et al. 455/412.2 |
| 6,600,975 B2 | 7/2003 | Moriguchi et al. | 2002/0168981 A1 | 11/2002 | Meda |
| 6,647,257 B2 | 11/2003 | Owensby | 2002/0198004 A1 | 12/2002 | Heie et al. |
| 6,647,269 B2 | 11/2003 | Hendrey et al. | 2003/0114160 A1 | 6/2003 | Verkama et al. |
| 6,650,894 B1 | 11/2003 | Berstis et al. | 2003/0129995 A1 | 7/2003 | Niwa et al. |
| 6,678,516 B2 | 1/2004 | Nordman et al. | 2003/0137408 A1 | 7/2003 | Breiner |
| 6,687,497 B1 | 2/2004 | Parvulescu et al. | 2003/0143988 A1 | 7/2003 | Jamadagni |
| 6,690,940 B1 | 2/2004 | Brown et al. | 2004/0023670 A1 | 2/2004 | Merheb |
| 6,701,158 B2 | 3/2004 | Moreth | 2004/0092253 A1 | 5/2004 | Simonds et al. |
| 6,714,519 B2 | 3/2004 | Luzzatti et al. | 2004/0156333 A1 | 8/2004 | Bush |
| 6,728,542 B2 | 4/2004 | Meda | 2004/0166878 A1 | 8/2004 | Erschine et al. |
| 6,731,925 B2 | 5/2004 | Naboulsi | 2004/0198332 A1 | 10/2004 | Lundsgaard |
| 6,771,946 B1 | 8/2004 | Oyaski | 2004/0203766 A1 | 10/2004 | Jenniges et al. |
| 6,804,524 B1 | 10/2004 | Vandermeyden | 2004/0203900 A1 | 10/2004 | Cedervall et al. |
| 6,807,435 B2 | 10/2004 | Yamashita | 2004/0248589 A1 | 12/2004 | Gwon et al. |
| 6,816,731 B1 | 11/2004 | Maruyama | 2004/0253963 A1 | 12/2004 | Park et al. |
| 6,819,928 B1 | 11/2004 | Hokao | 2005/0037760 A1 | 2/2005 | Maruyama |
| 6,832,093 B1 | 12/2004 | Ranta | 2005/0070298 A1 | 3/2005 | Caspi et al. |
| 6,847,822 B1 | 1/2005 | Dennison et al. | 2005/0096026 A1 | 5/2005 | Chitrapu et al. |
| 6,885,869 B2 * | 4/2005 | Raith 455/456.6 | 2005/0119002 A1 | 6/2005 | Bauchot et al. |
| 6,922,571 B1 | 7/2005 | Kinoshita | 2005/0153680 A1 | 7/2005 | Yoshioka et al. |
| 6,934,547 B2 | 8/2005 | Suzuki | 2005/0255874 A1 | 11/2005 | Stewart-Baxter et al. |
| 6,961,561 B2 | 11/2005 | Himmel et al. | 2005/0261011 A1 | 11/2005 | Scott |
| 6,973,333 B1 | 12/2005 | O'Neil | 2005/0264404 A1 | 12/2005 | Franczyk et al. |
| 6,978,136 B2 | 12/2005 | Jenniges et al. | 2006/0040640 A1 | 2/2006 | Thompson et al. |
| 7,003,525 B1 | 2/2006 | Horvitz et al. | 2006/0046765 A1 | 3/2006 | Kogure |
| 7,006,793 B2 | 2/2006 | Himmel et al. | 2006/0058036 A1 | 3/2006 | Watanabe et al. |
| 7,015,831 B2 | 3/2006 | Karlsson et al. | 2006/0099940 A1 | 5/2006 | Pfleging et al. |
| 7,042,391 B2 | 5/2006 | Meunier et al. | 2006/0099959 A1 * | 5/2006 | Staton et al. 455/456.1 |
| 7,064,656 B2 | 6/2006 | Belcher et al. | 2006/0099969 A1 | 5/2006 | Staton et al. |
| 7,072,753 B2 | 7/2006 | Eberle et al. | 2006/0104297 A1 | 5/2006 | Buyukkoc et al. |
| 7,110,749 B2 | 9/2006 | Zellner et al. | 2006/0116807 A1 | 6/2006 | Hijikata |
| 7,149,627 B2 | 12/2006 | Ockerse et al. | 2006/0148490 A1 | 7/2006 | Bates et al. |
| 7,181,228 B2 | 2/2007 | Boesch | 2006/0211412 A1 | 9/2006 | Vance |
| 7,242,946 B2 | 7/2007 | Kokkonen et al. | 2006/0217130 A1 | 9/2006 | Rowitch et al. |
| 7,269,627 B2 | 9/2007 | Knauerhase | 2006/0229058 A1 | 10/2006 | Rosenberg |
| | | | 2006/0234746 A1 | 10/2006 | Bouat |
| | | | 2006/0246918 A1 | 11/2006 | Fok et al. |
| | | | 2006/0293842 A1 | 12/2006 | Casino |
| | | | 2007/0016643 A1 | 1/2007 | Boss et al. |
| | | | 2007/0072553 A1 | 3/2007 | Barbera |
| | | | 2007/0072616 A1 | 3/2007 | Irani |
| | | | 2007/0082678 A1 | 4/2007 | Himmelstein |
| | | | 2007/0287474 A1 | 12/2007 | Jenkins et al. |
| | | | 2008/0061988 A1 | 3/2008 | Mock et al. |
| | | | 2011/0009107 A1 | 1/2011 | Guba et al. |
| | | | 2011/0021234 A1 | 1/2011 | Tibbitts et al. |
| | | | 2012/0244883 A1 | 9/2012 | Tibbitts et al. |
- FOREIGN PATENT DOCUMENTS
- | | | |
|----|-------------------|---------|
| EP | 1931109 A1 | 6/2008 |
| FR | 2847409 A1 | 11/2002 |
| WO | WO 02/25970 A1 | 3/2002 |
| WO | WO 2006/070253 A2 | 7/2006 |
| WO | WO 2008/109477 A1 | 9/2008 |
- * cited by examiner

U.S. Patent

Feb. 3, 2015

Sheet 1 of 26

US 8,948,784 B2

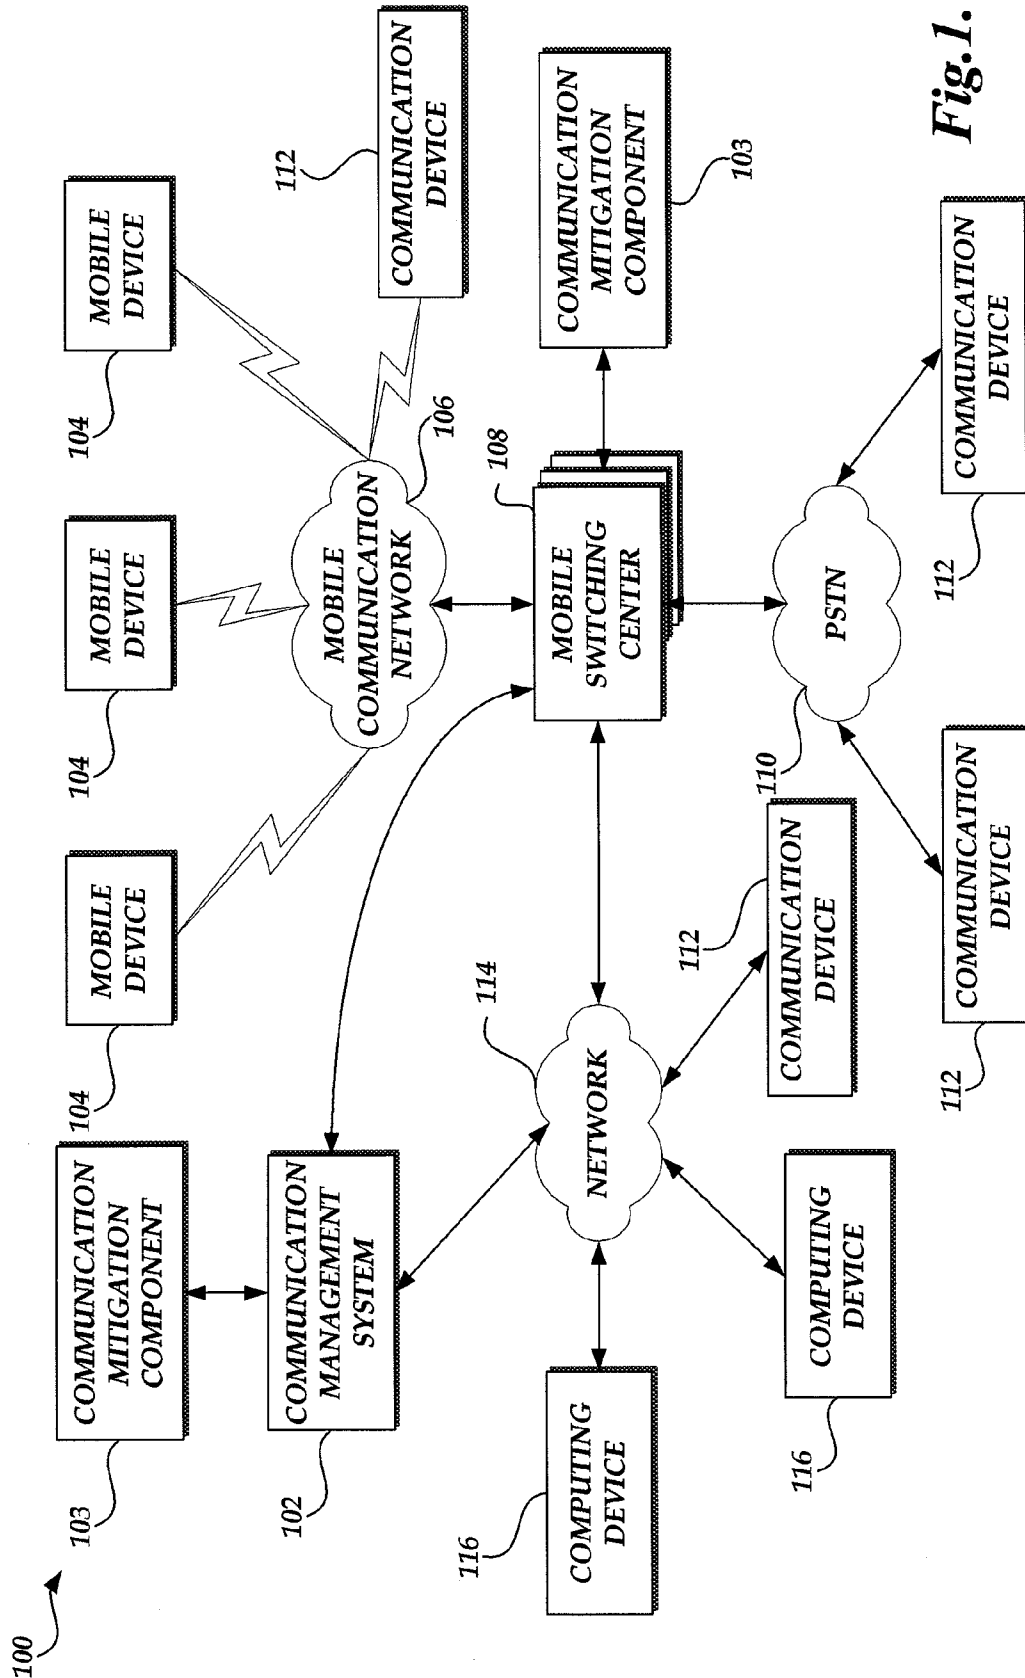

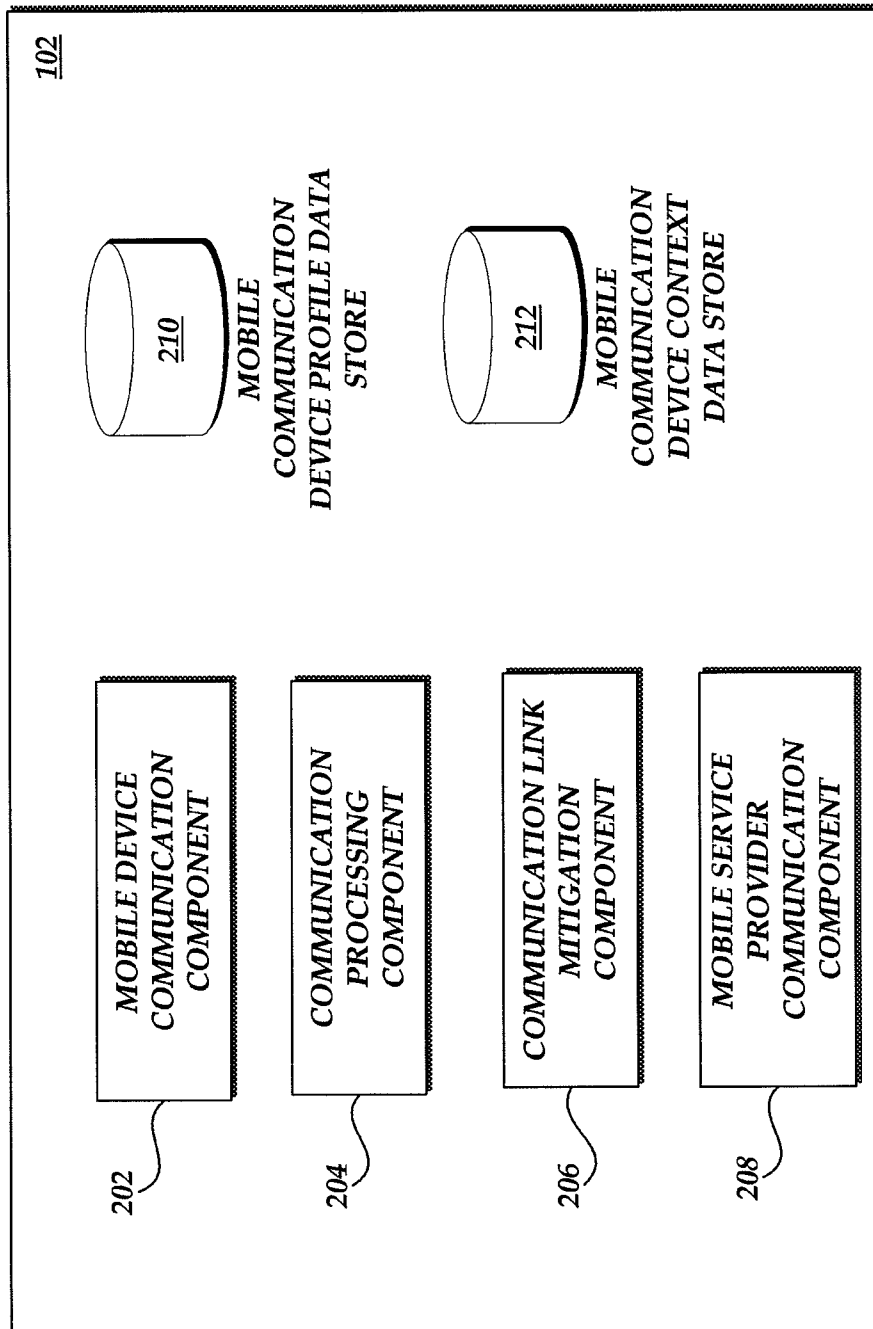


Fig. 2.



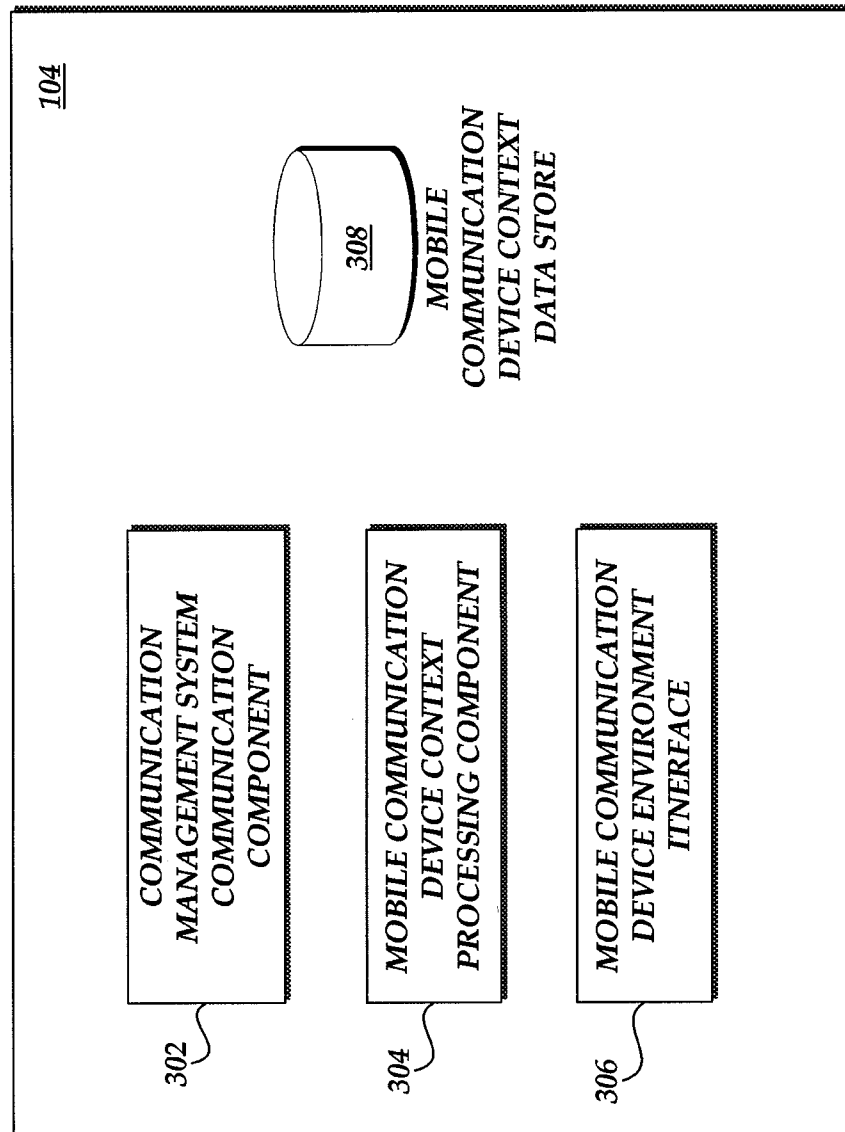


Fig. 3.

**Fig. 4A.**

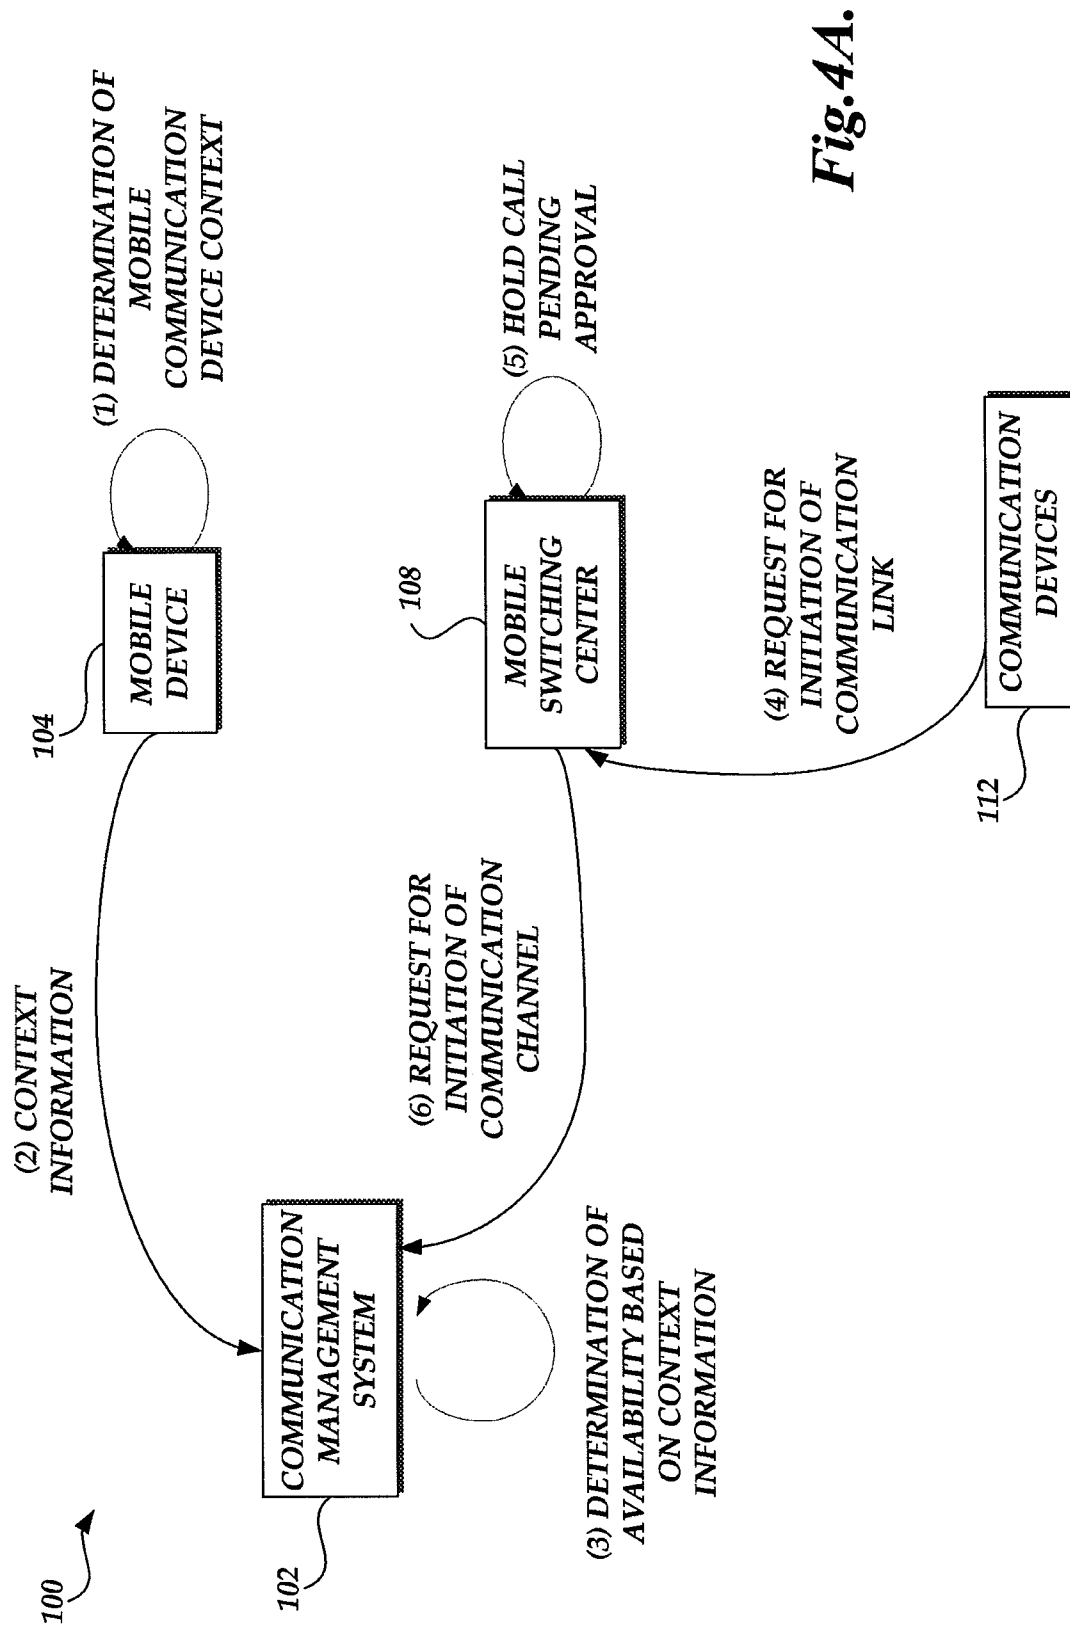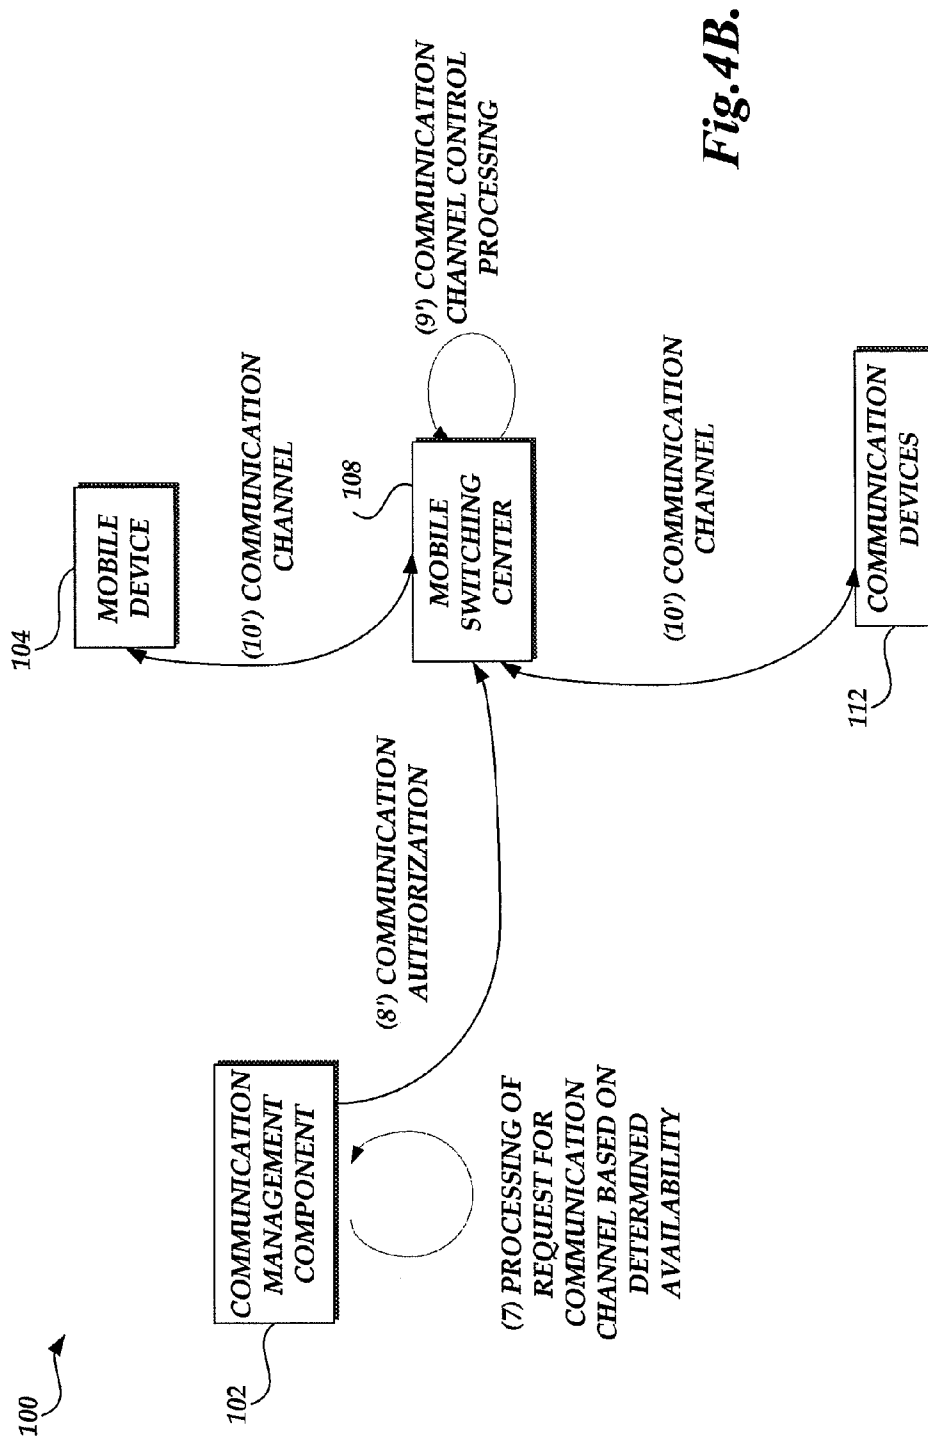


U.S. Patent

Feb. 3, 2015

Sheet 6 of 26

US 8,948,784 B2

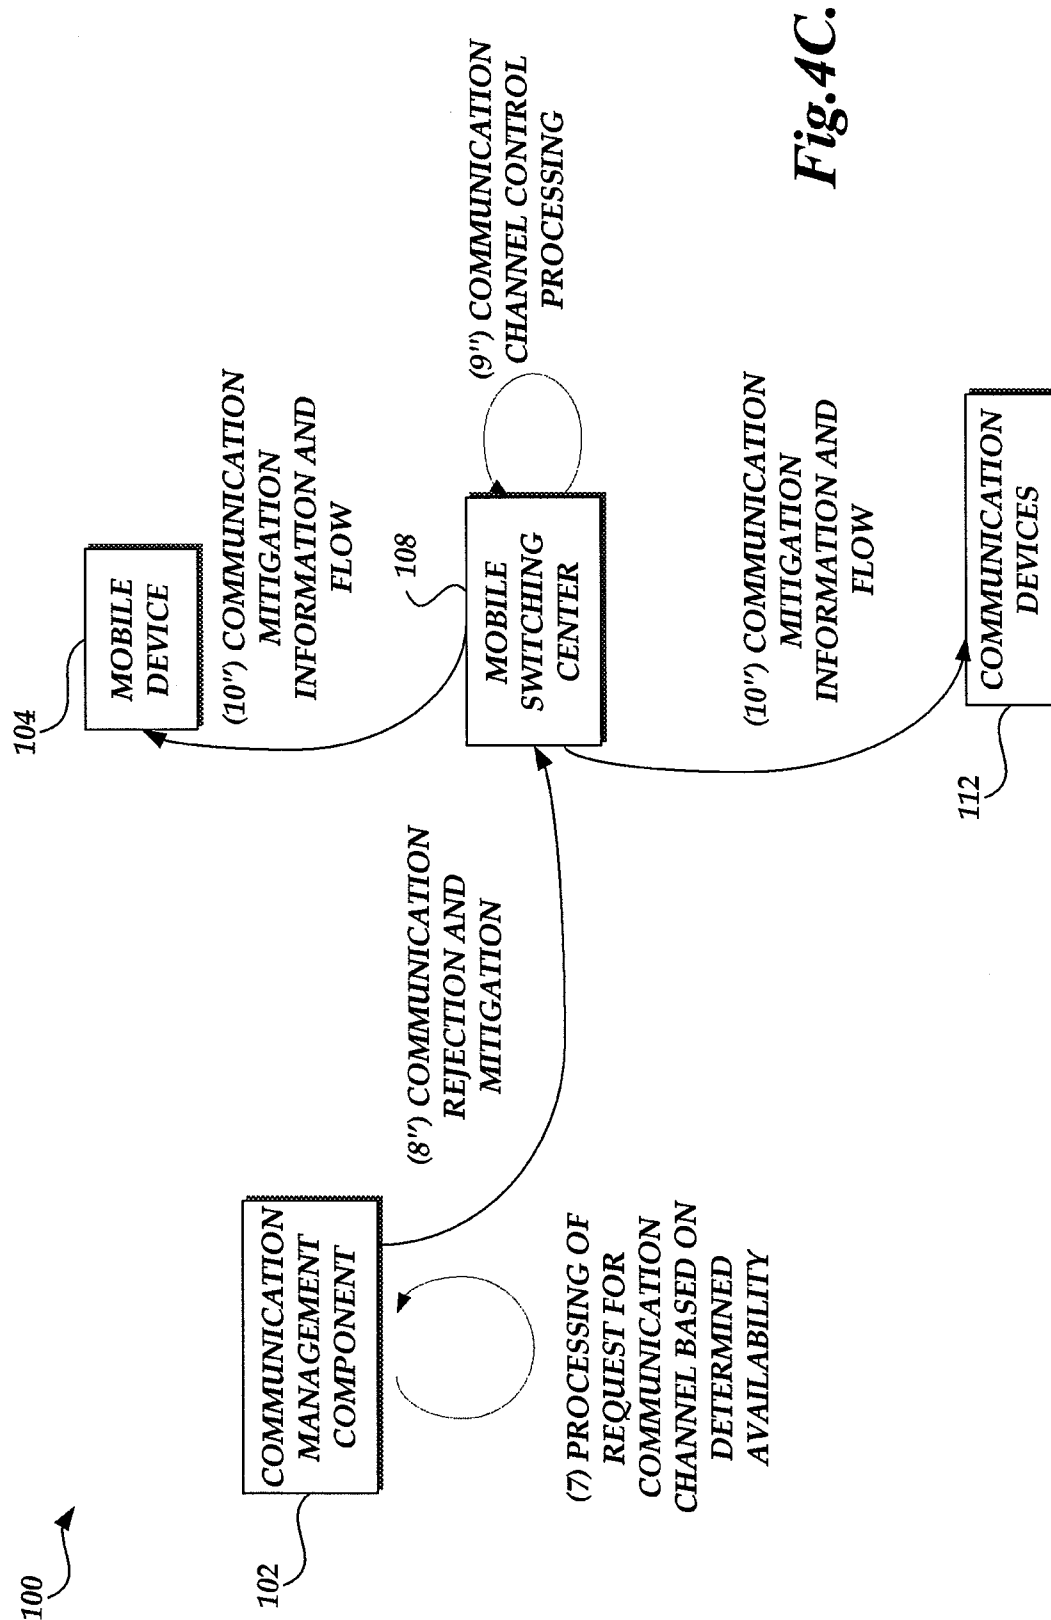

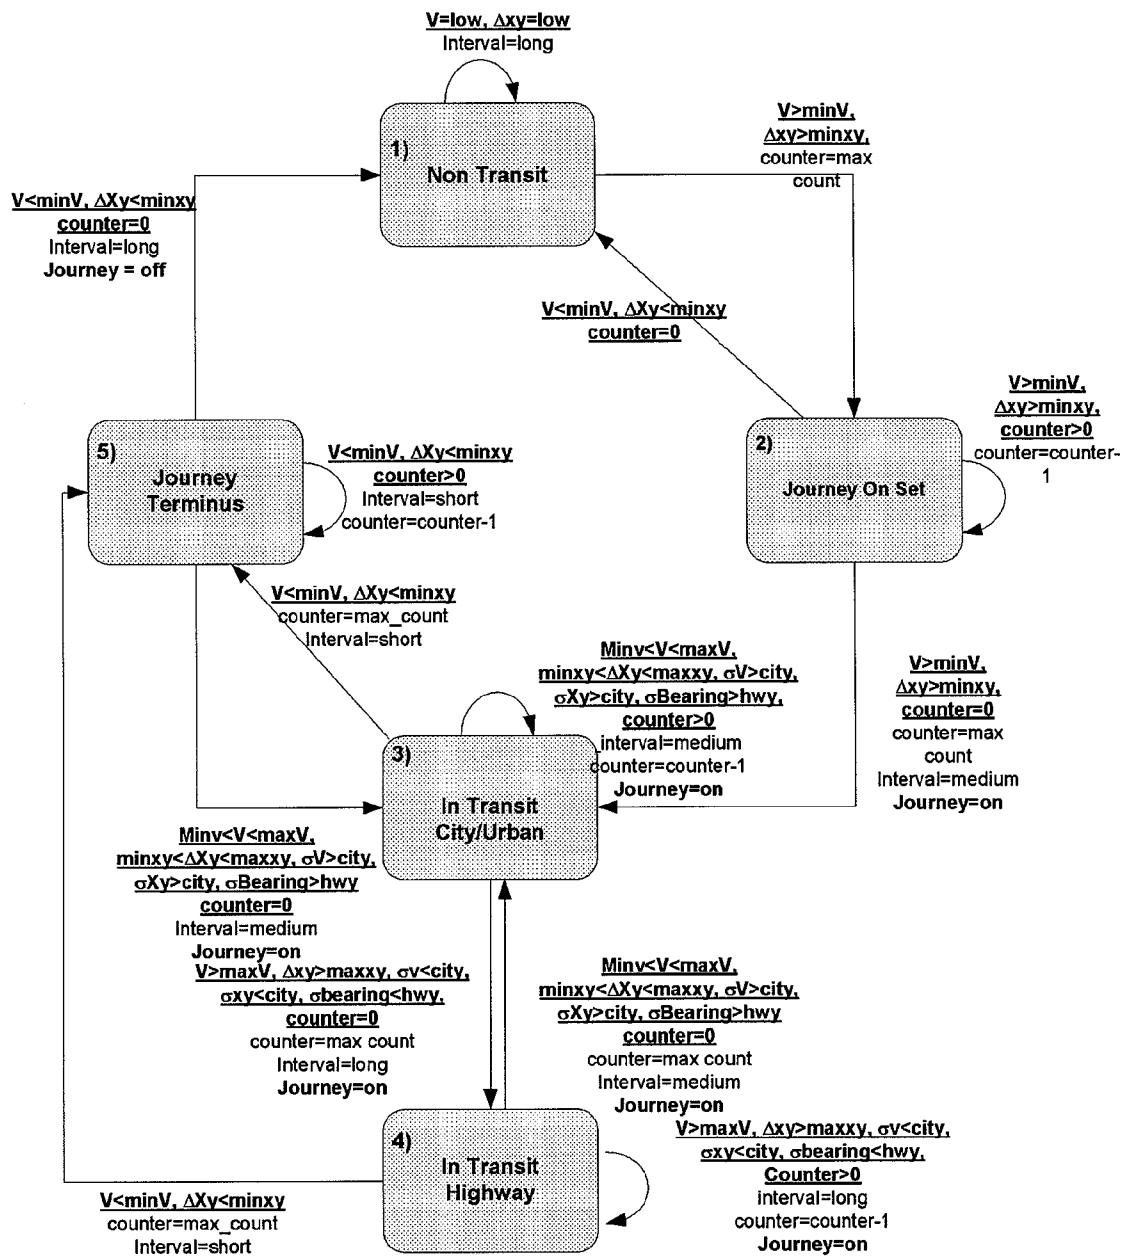


Fig.5.

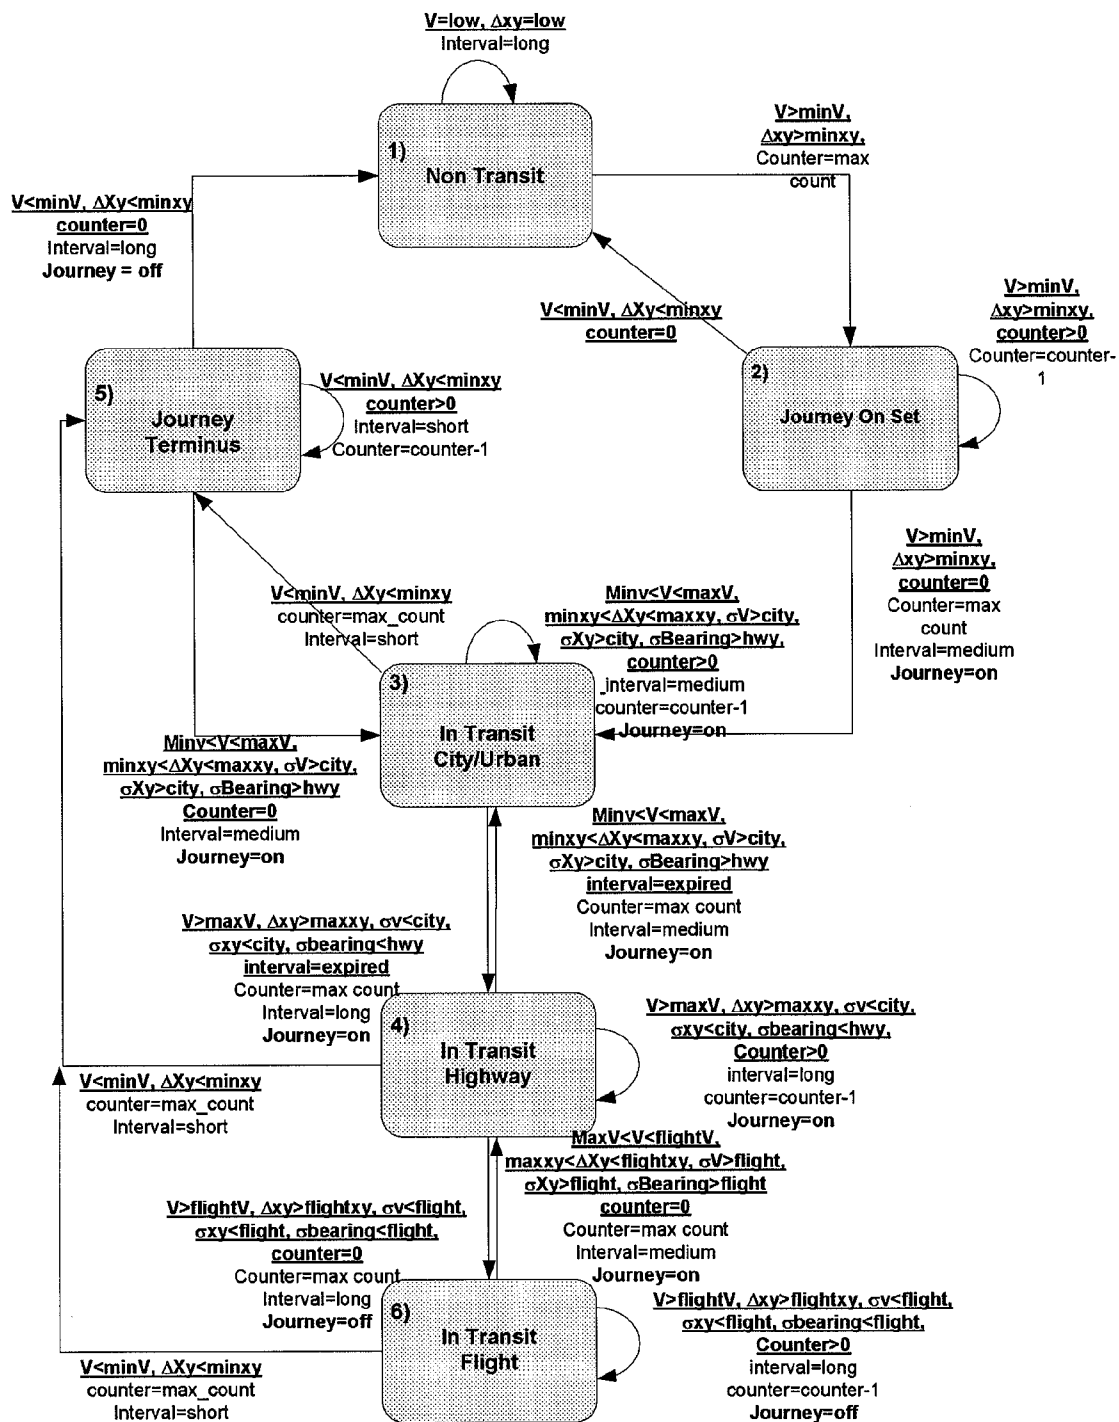


Fig.6.

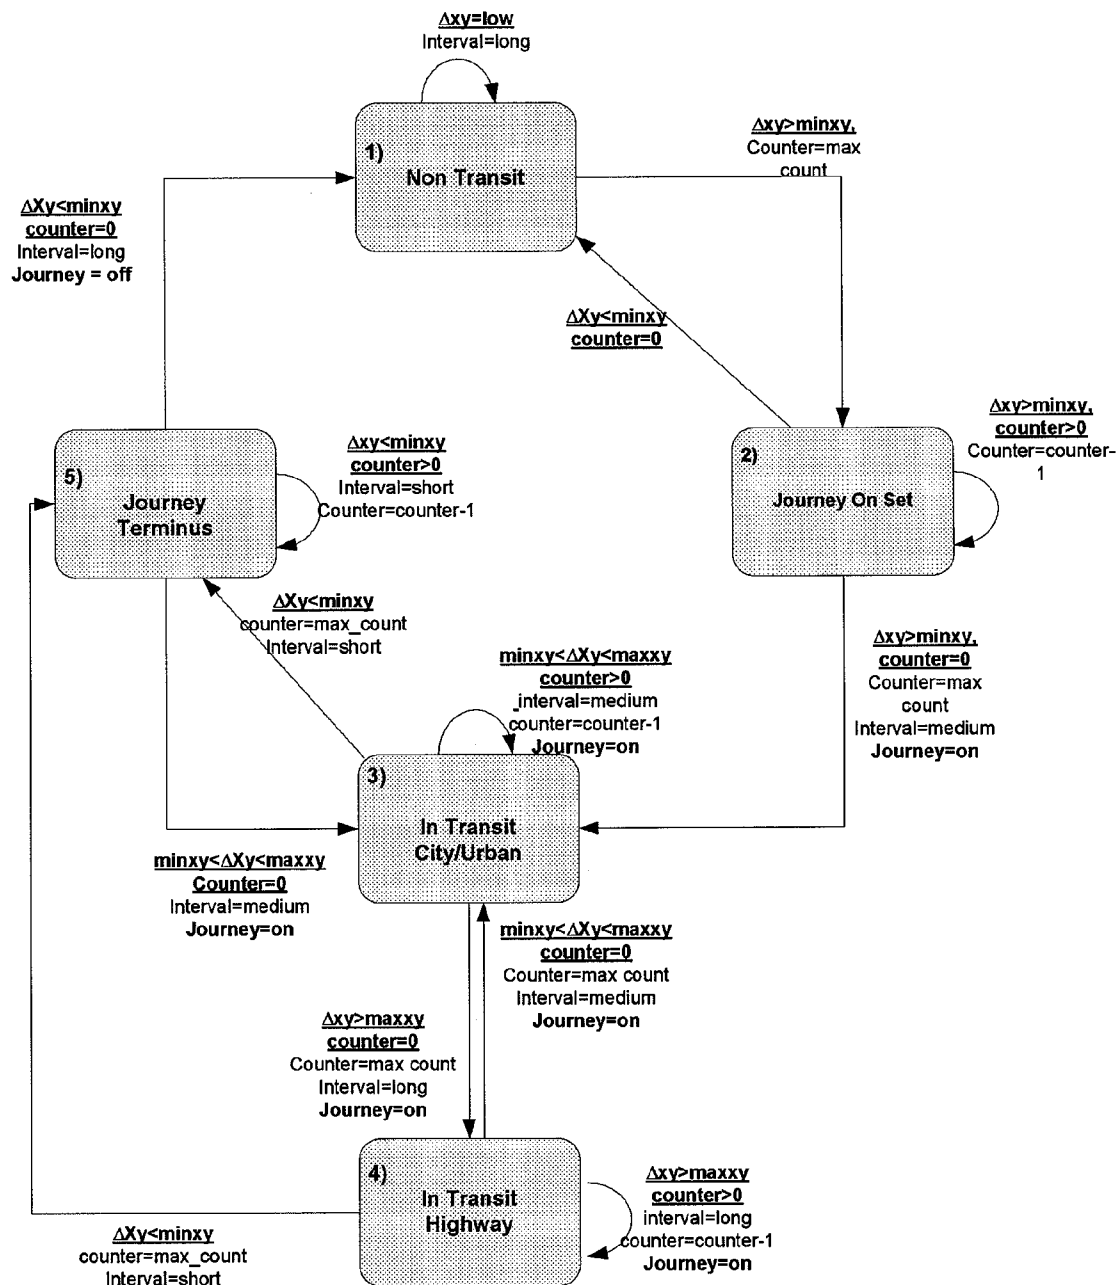
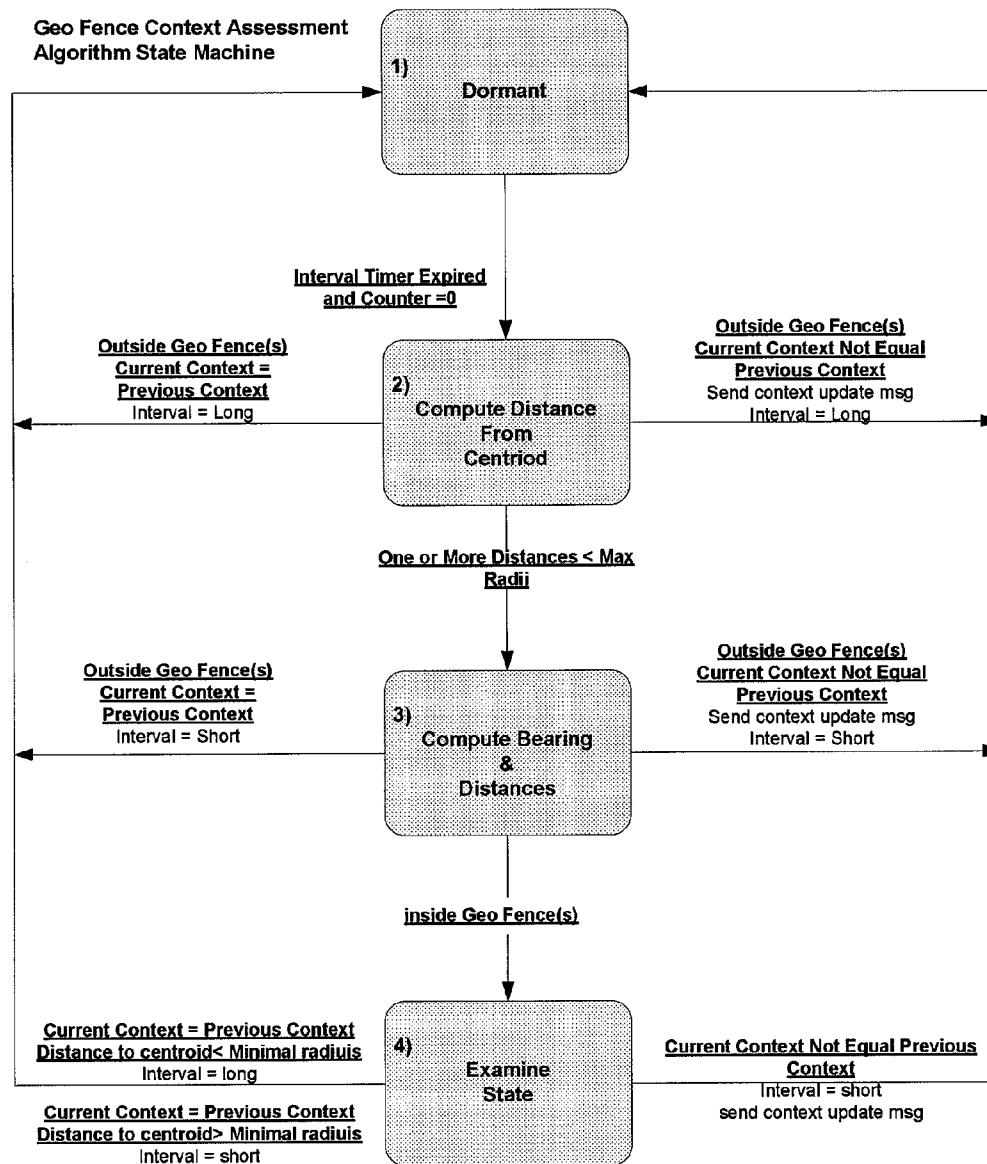


Fig. 7.

*Fig. 8.*





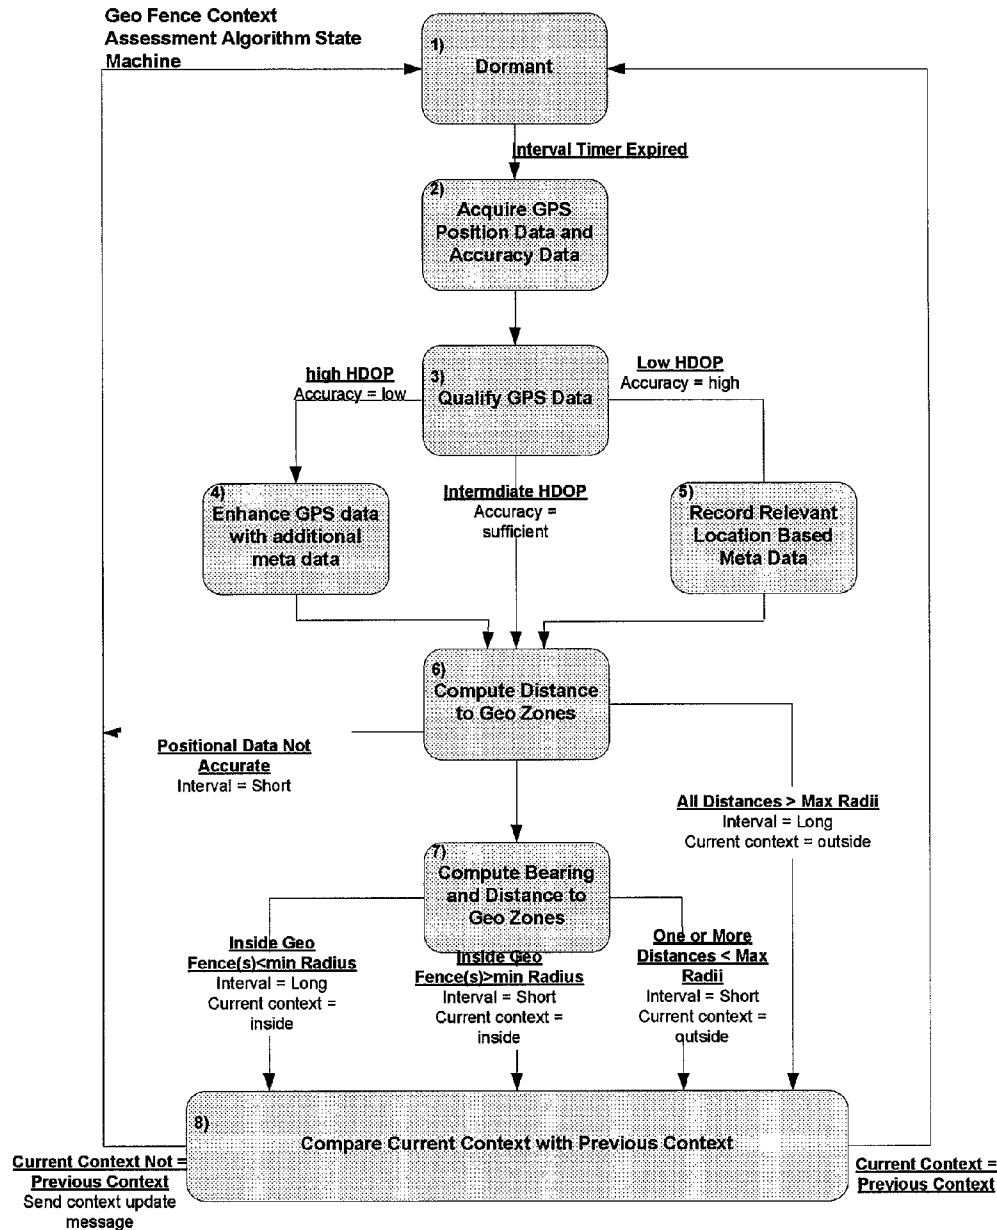



Fig. 9.


**Fig. 10A.**

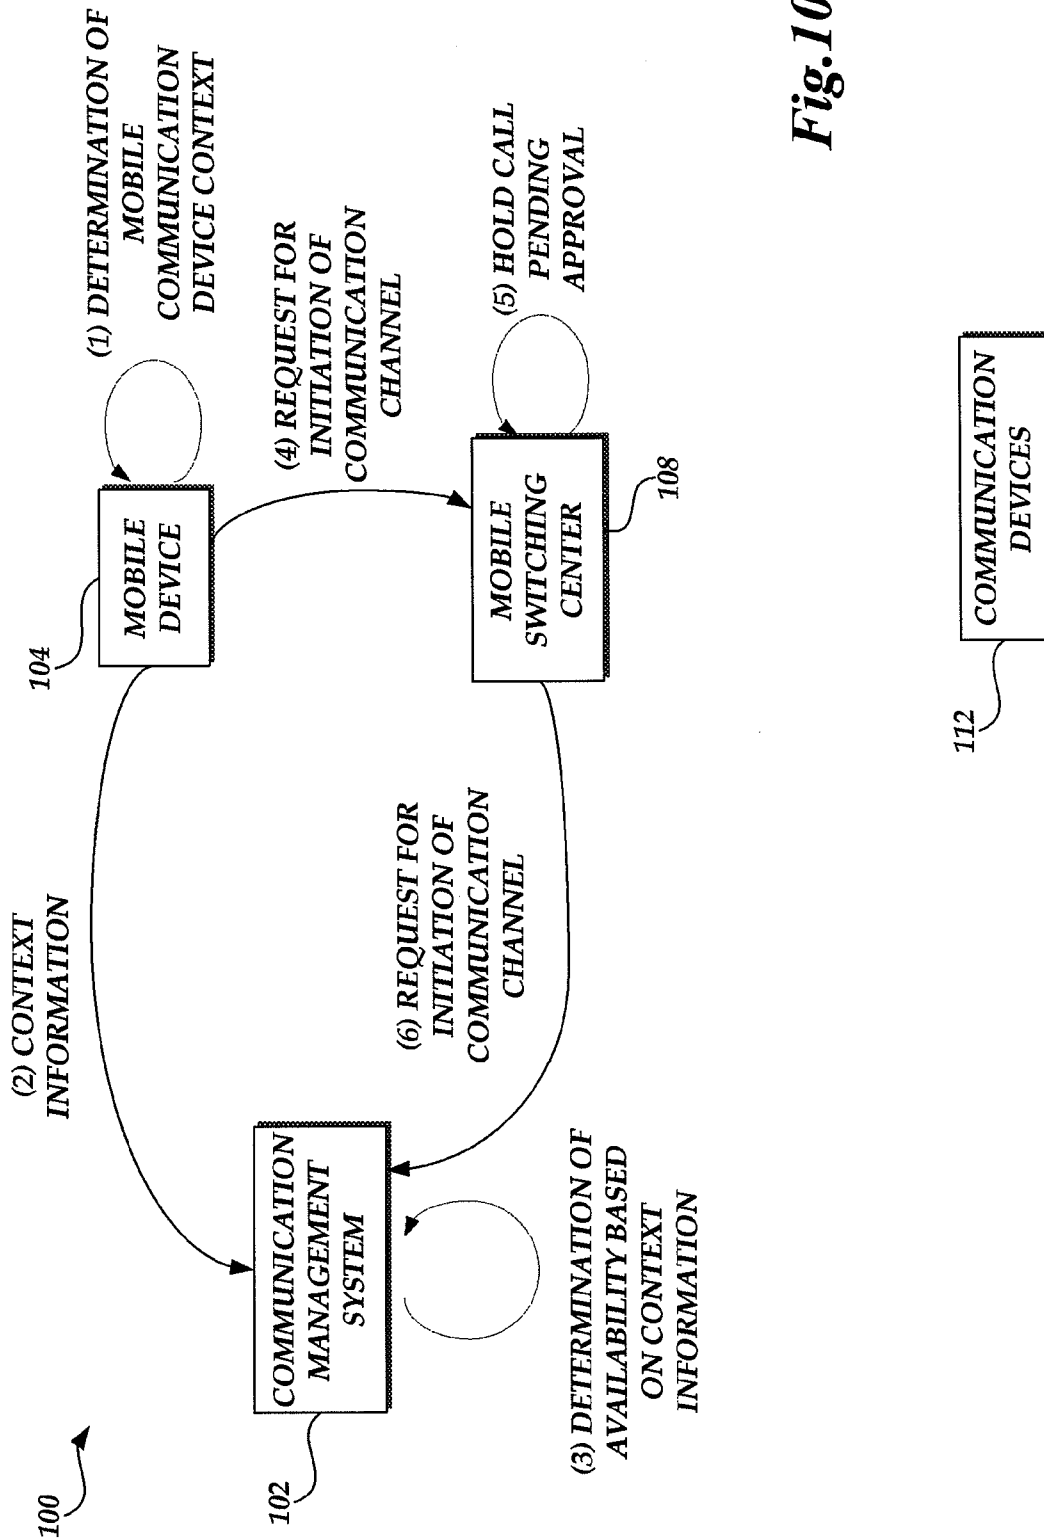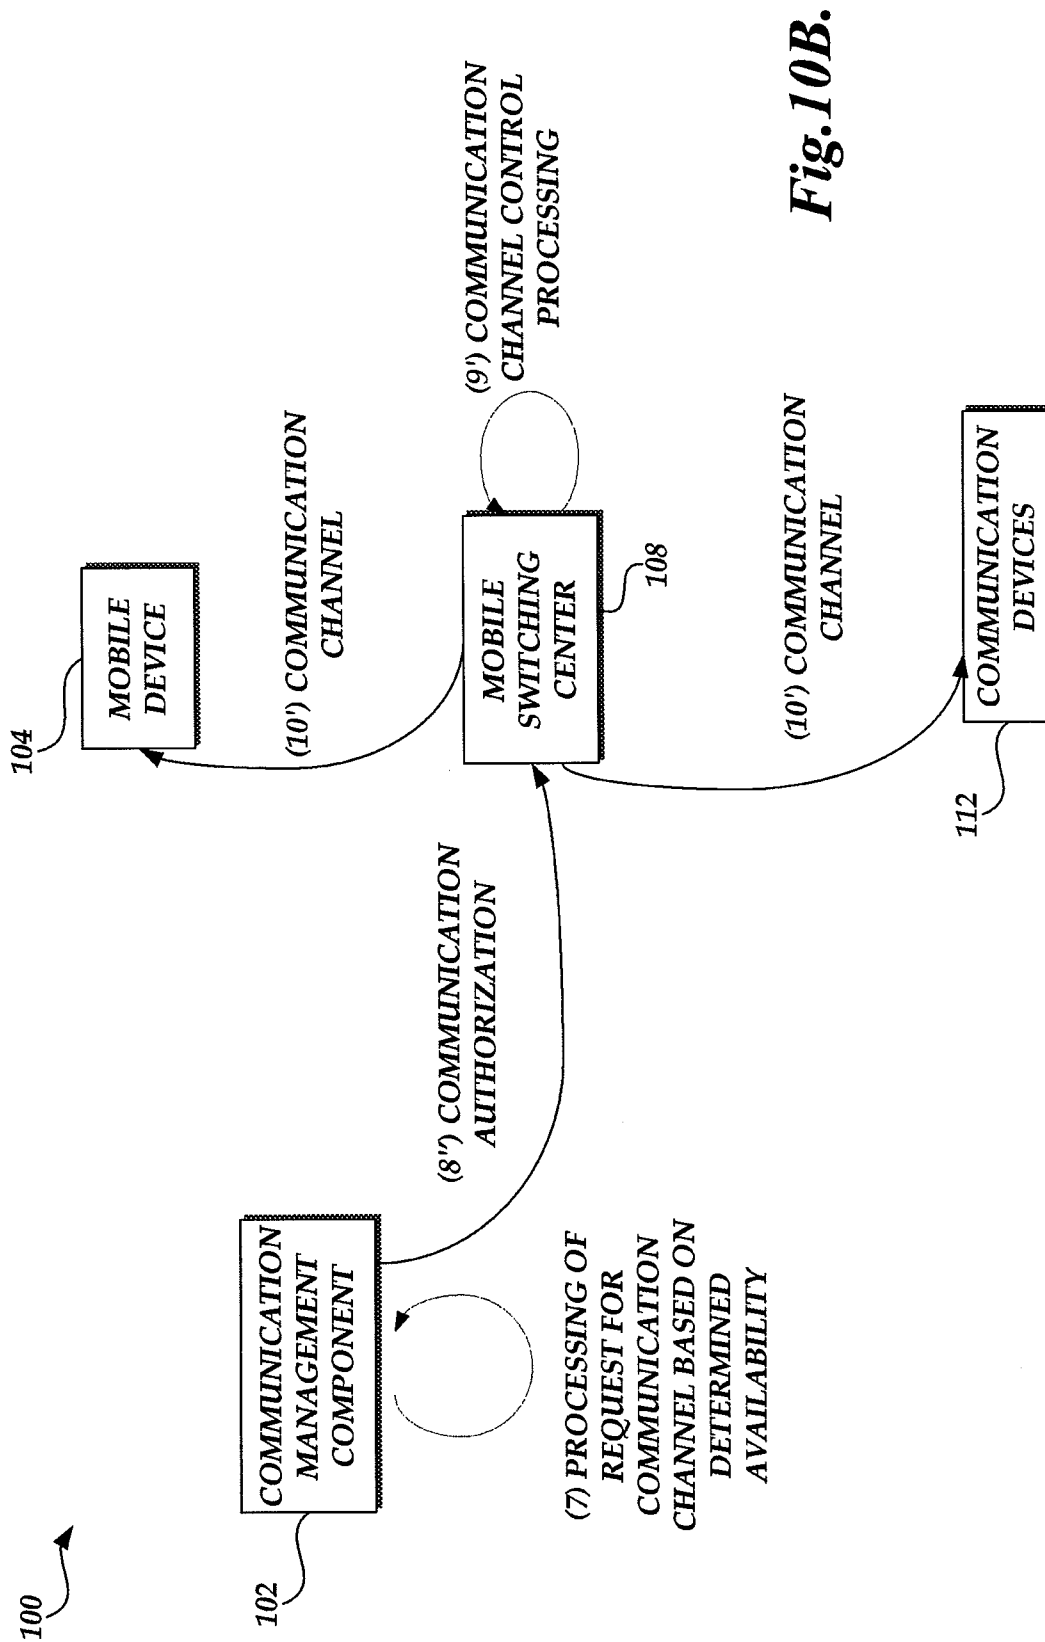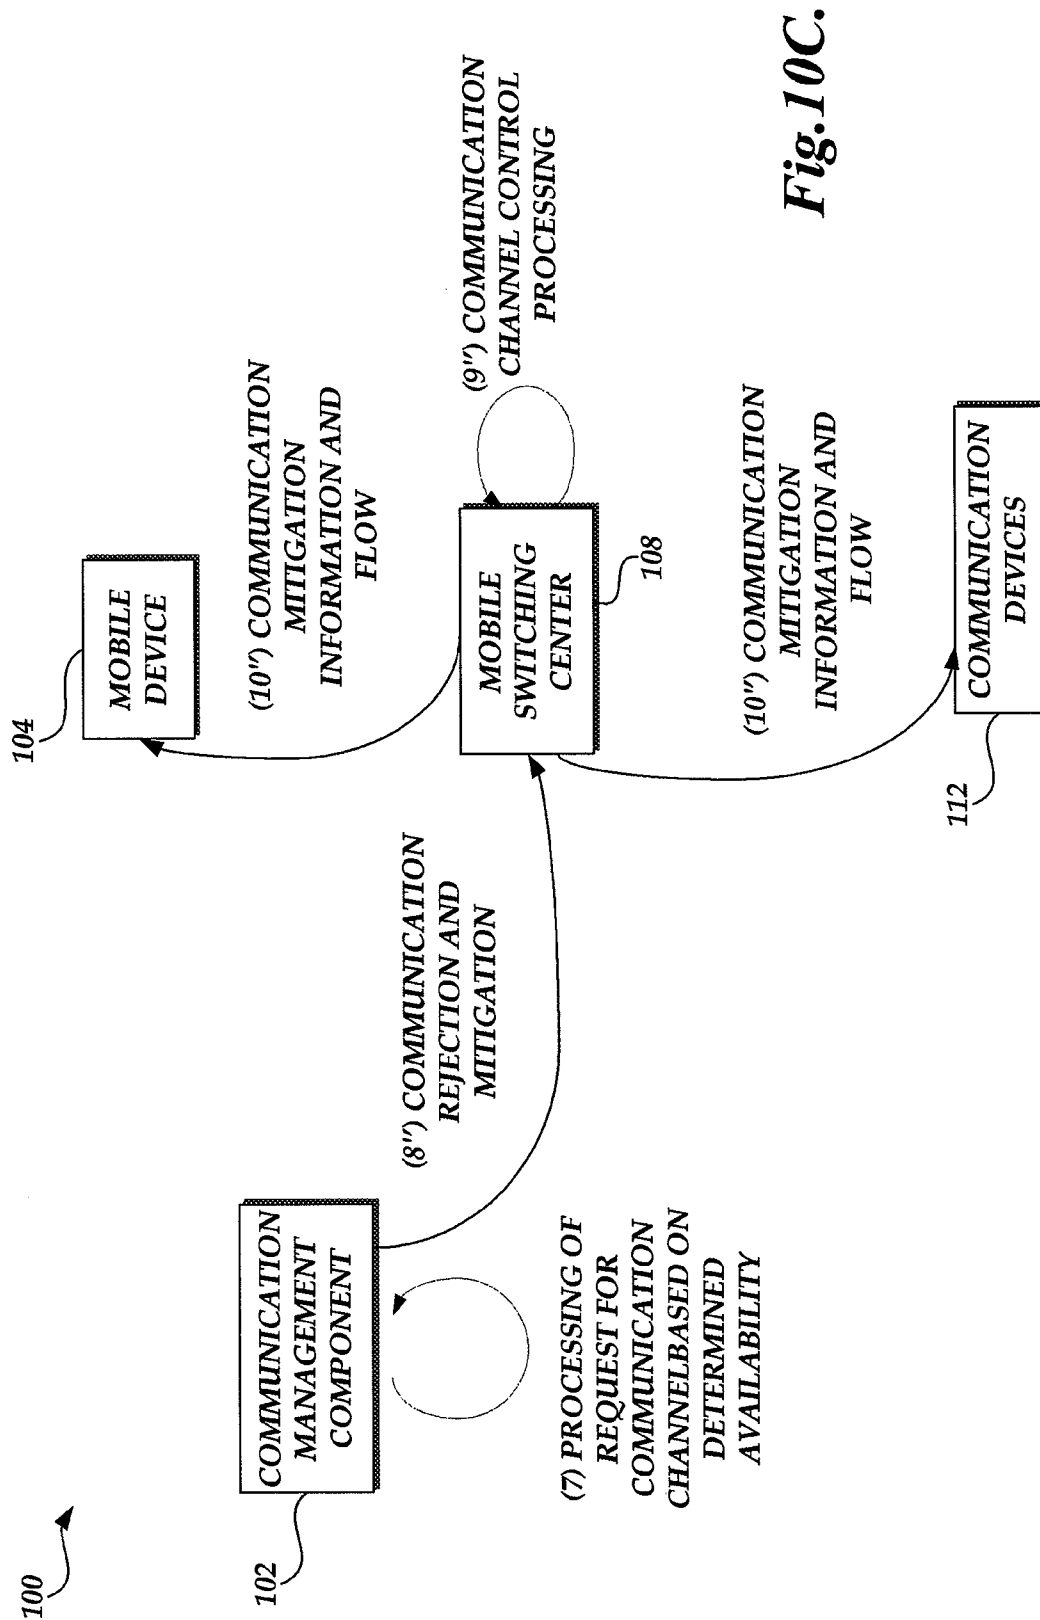

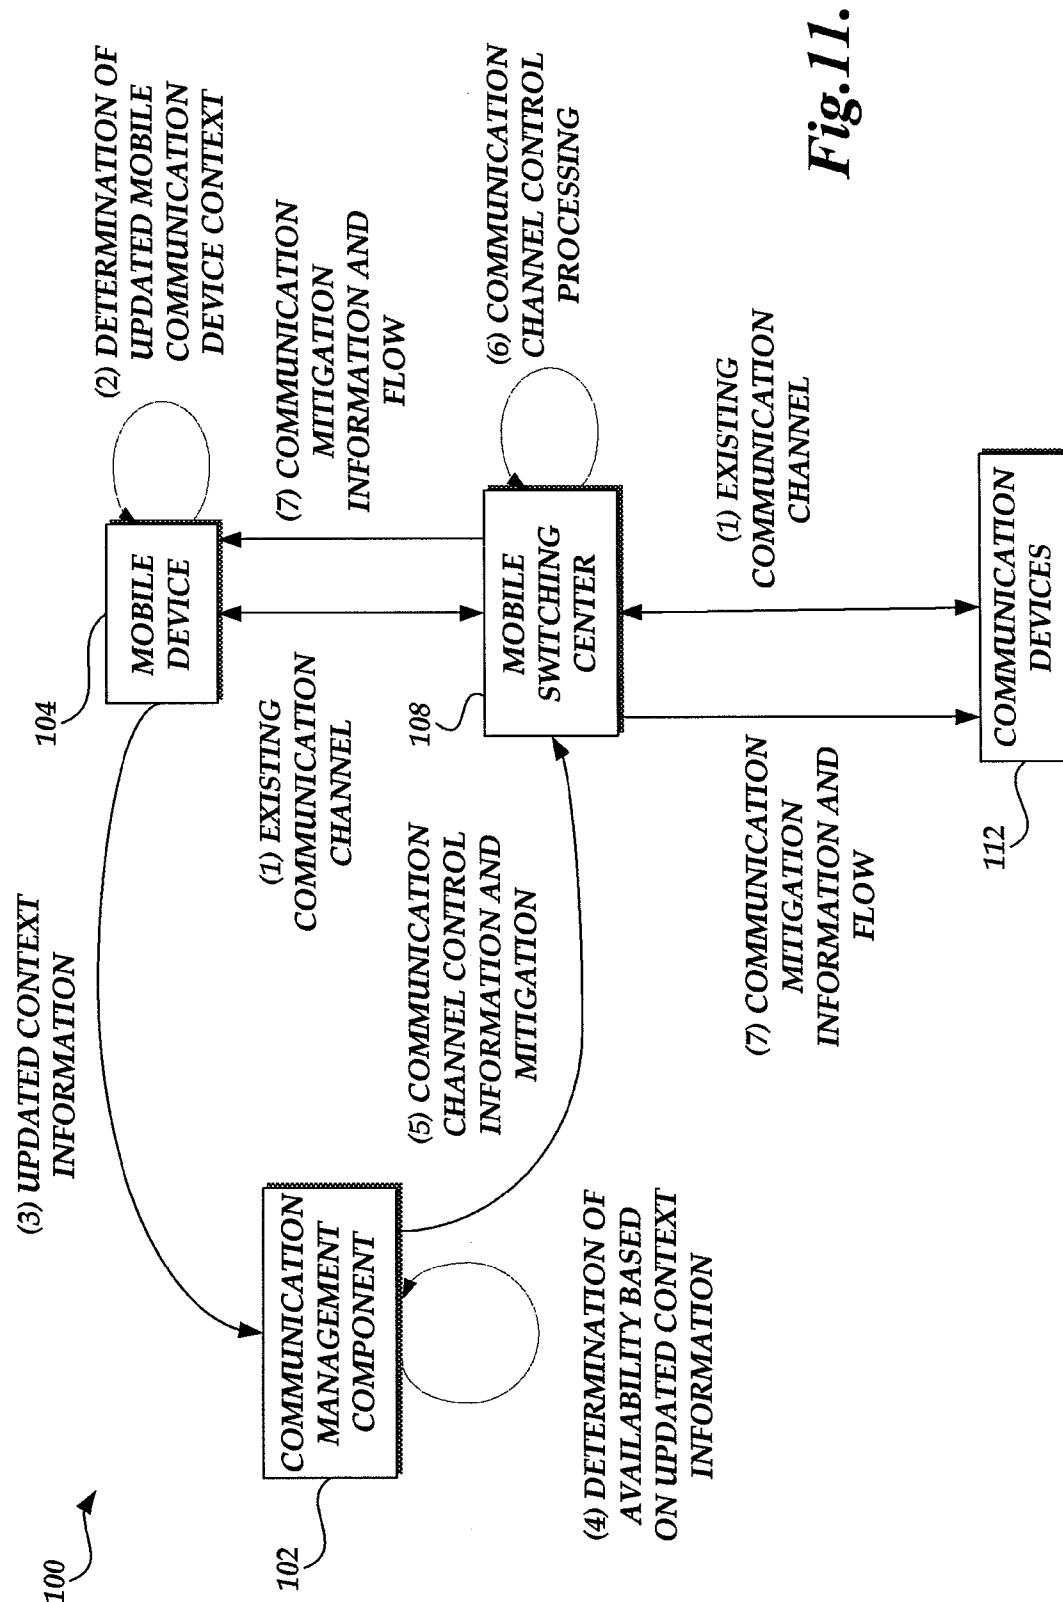

**Fig. 11.**

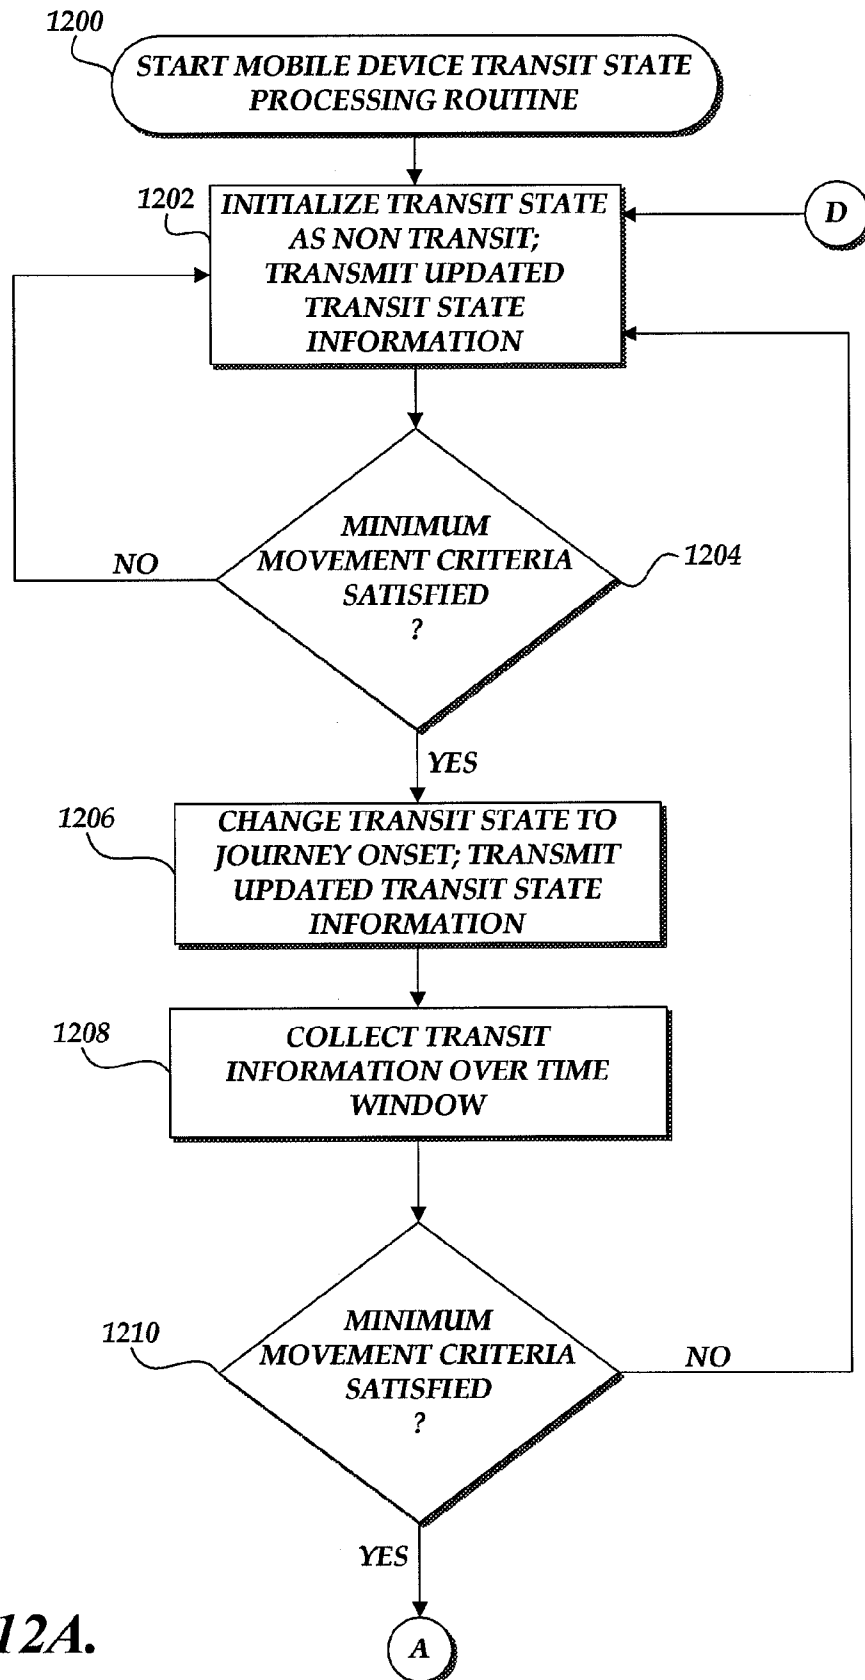*Fig. 12A.*

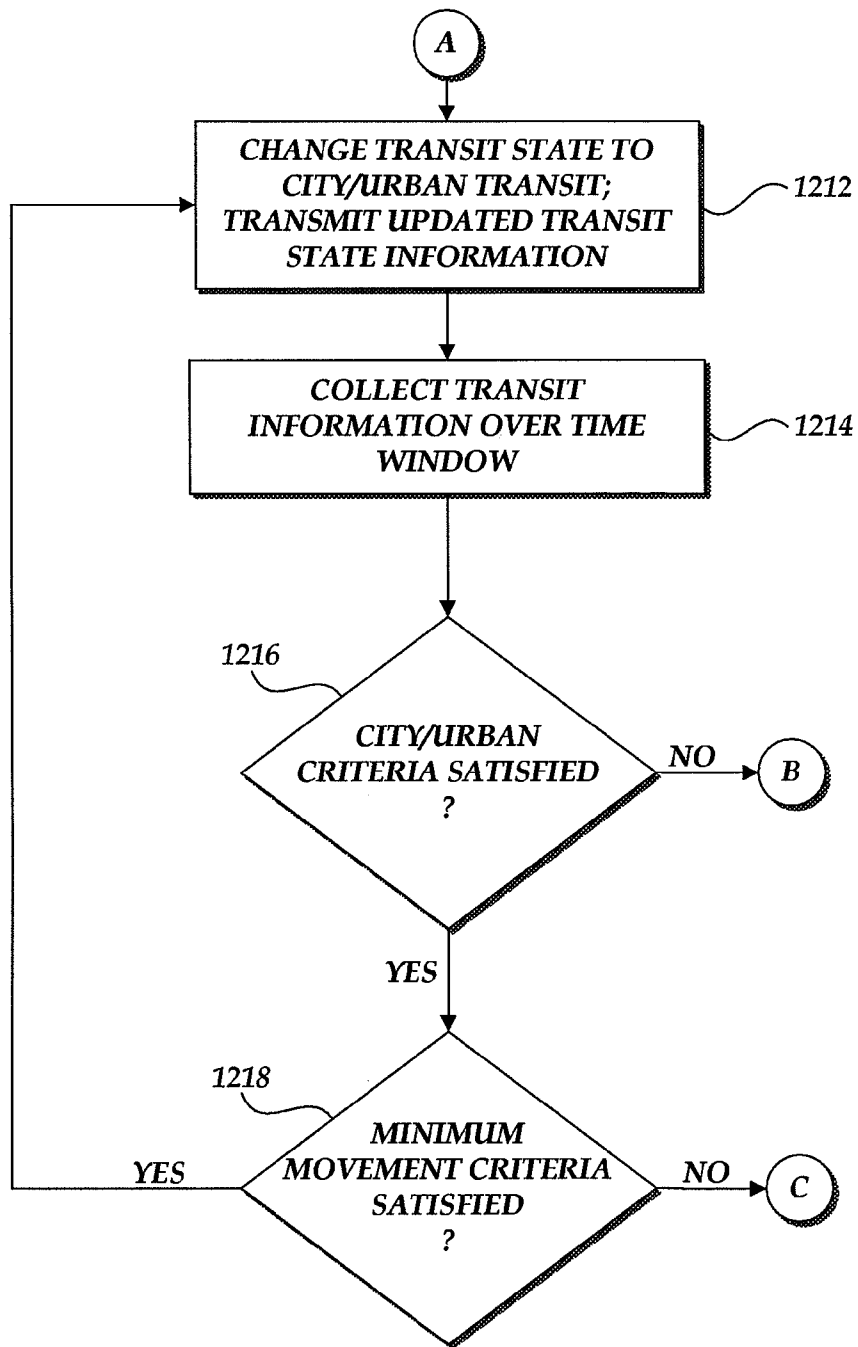**Fig.12B.**

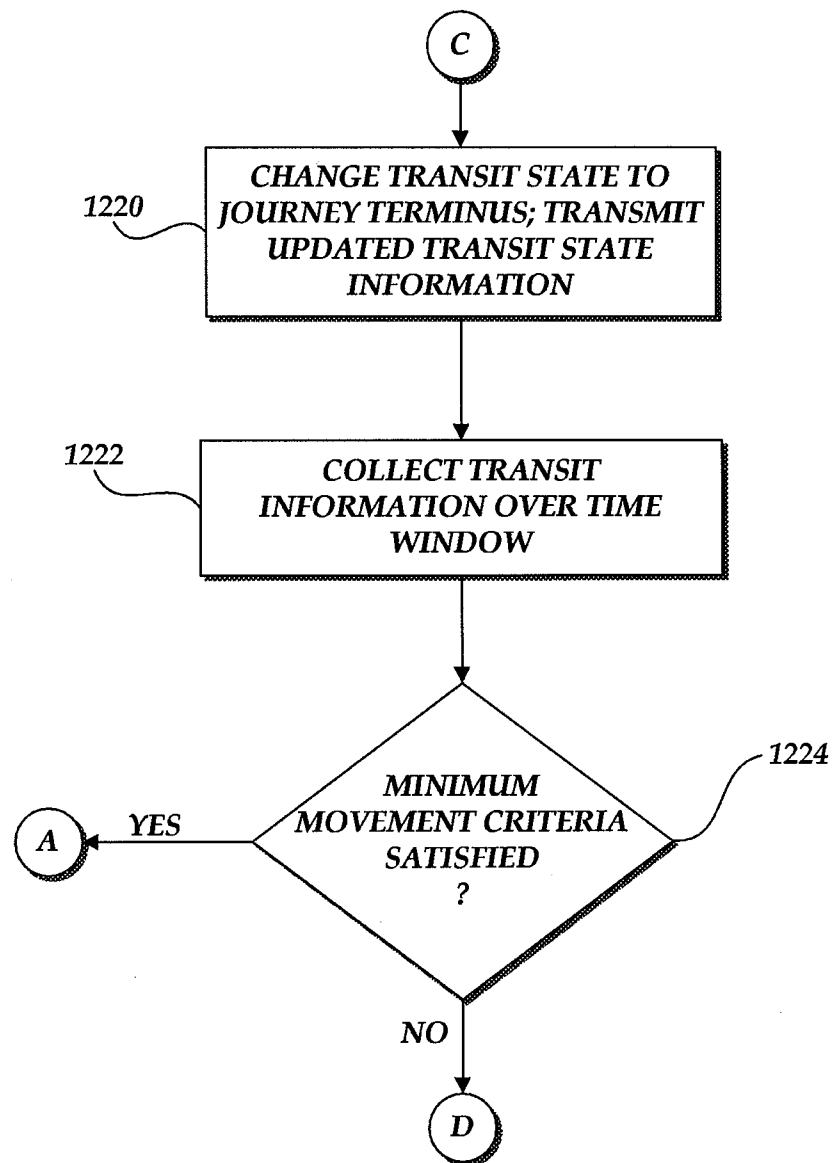
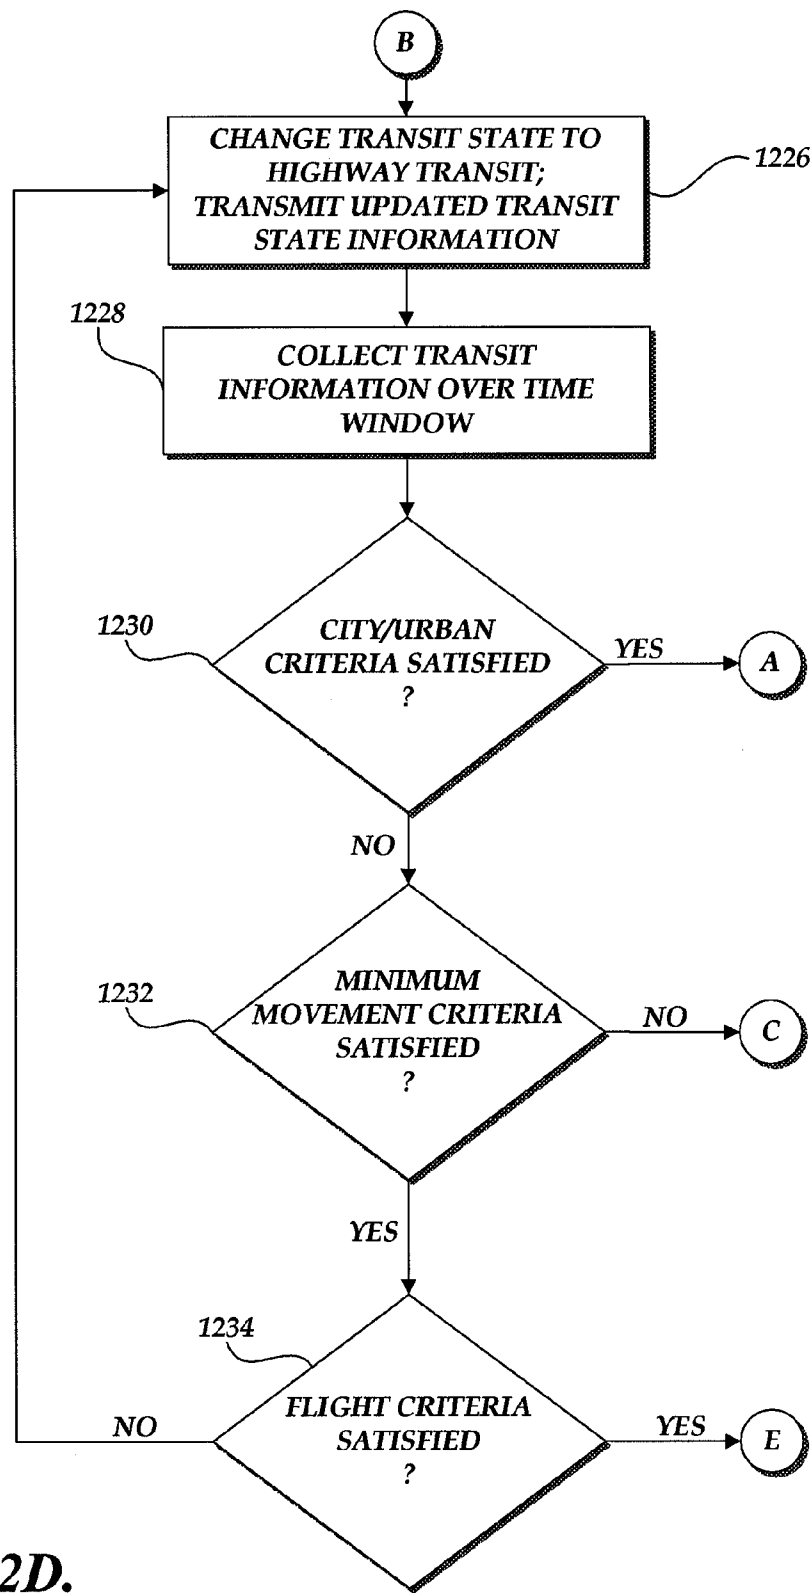
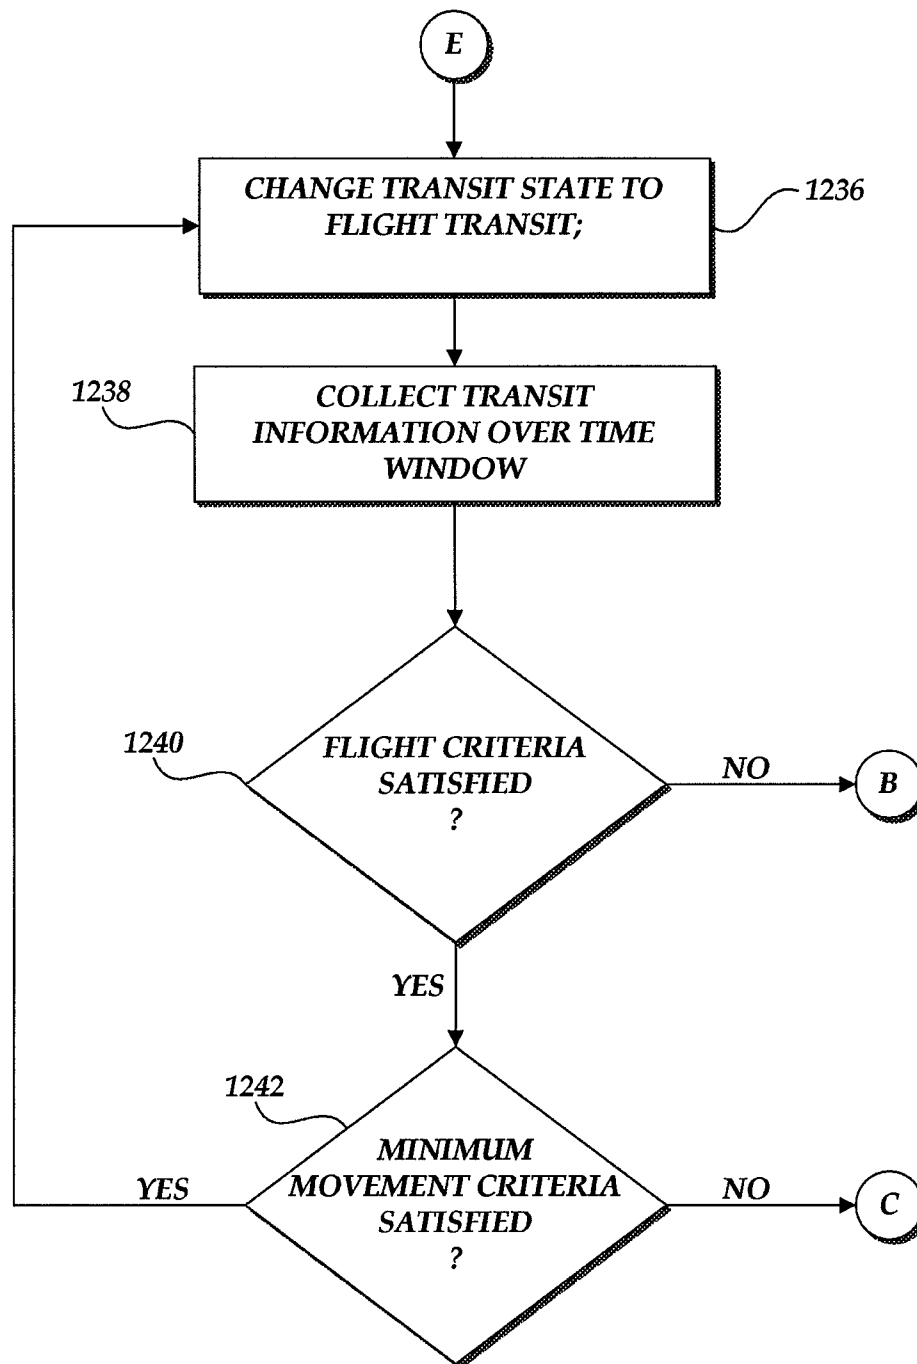
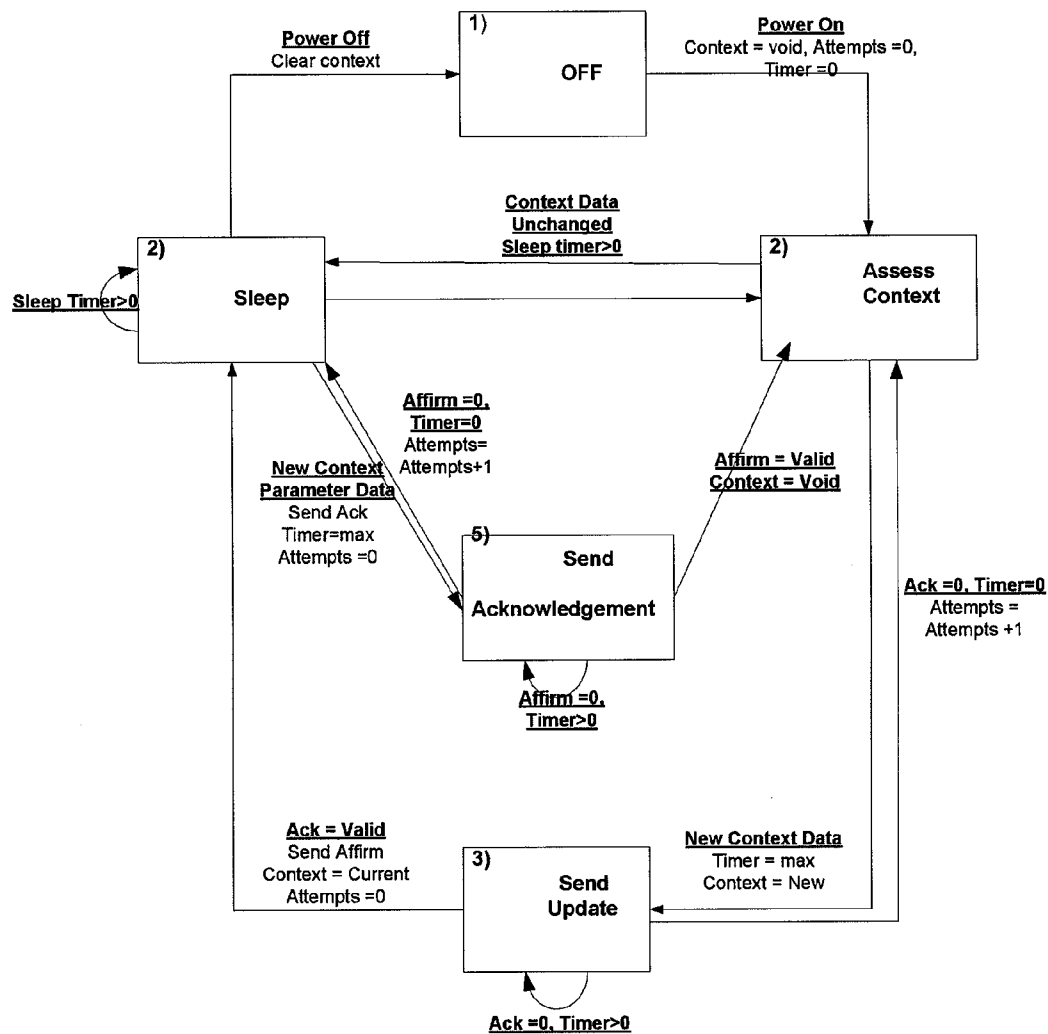
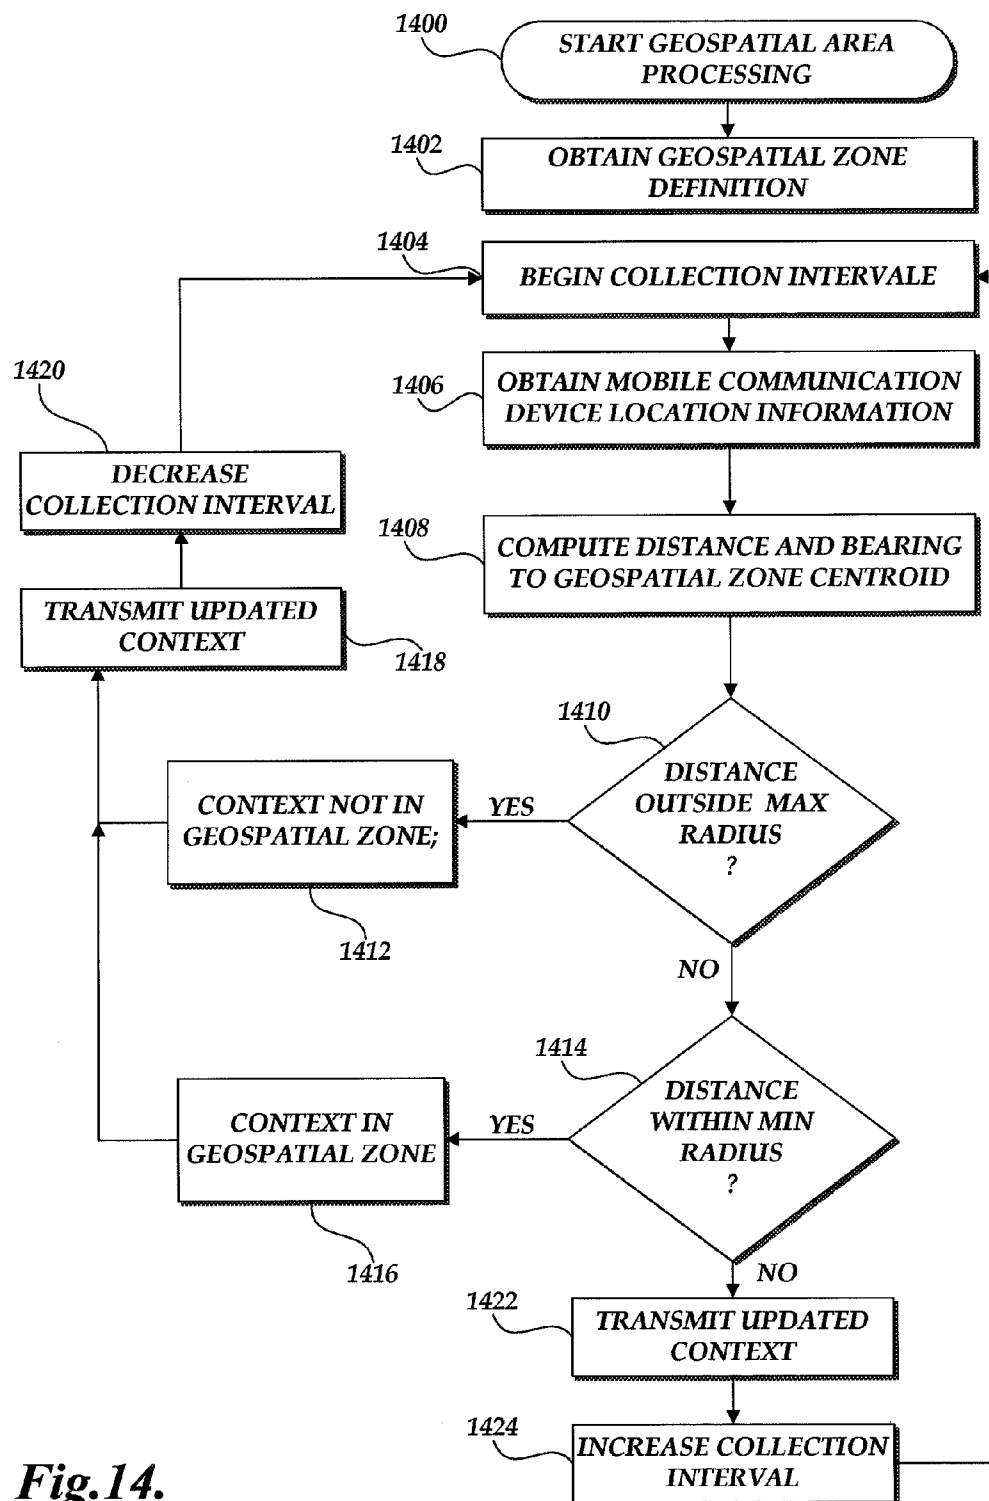



Fig.12C.


**Fig.12D.**

*Fig. 12E.*

*Fig. 13.*

**Fig.14.**

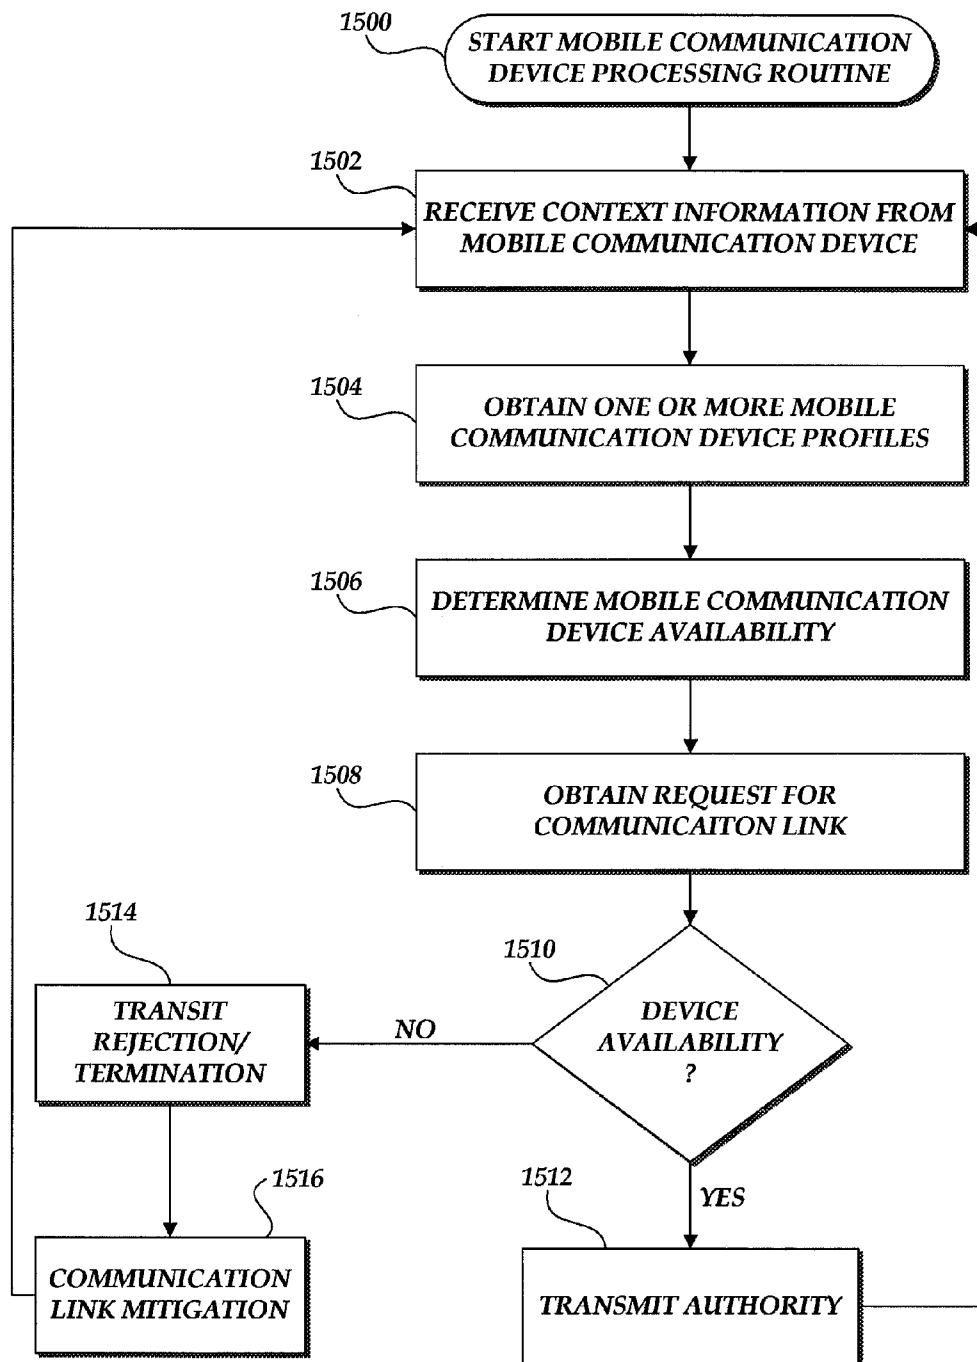*Fig.15.*

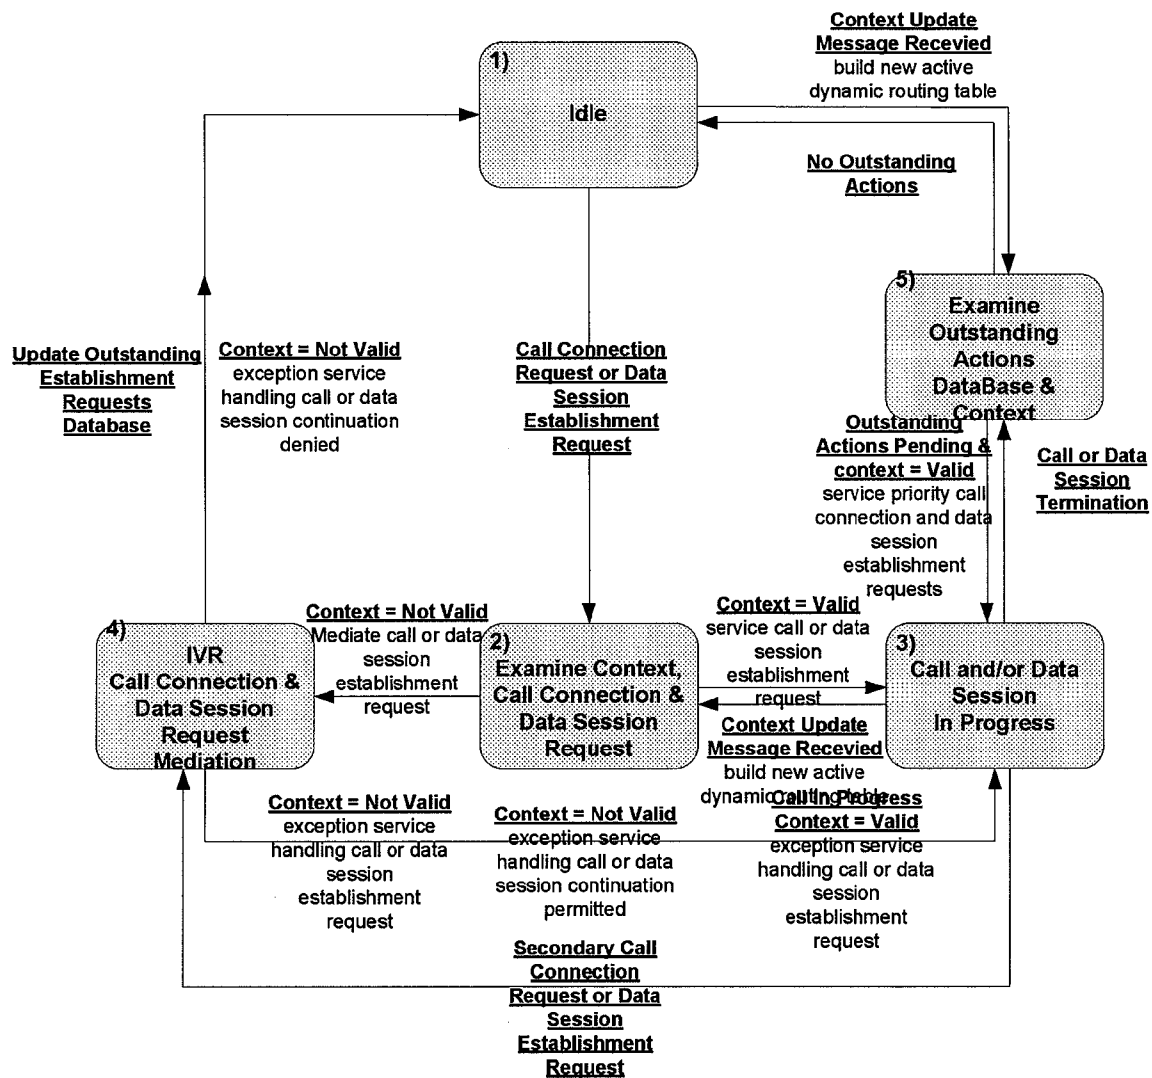*Fig.16.*

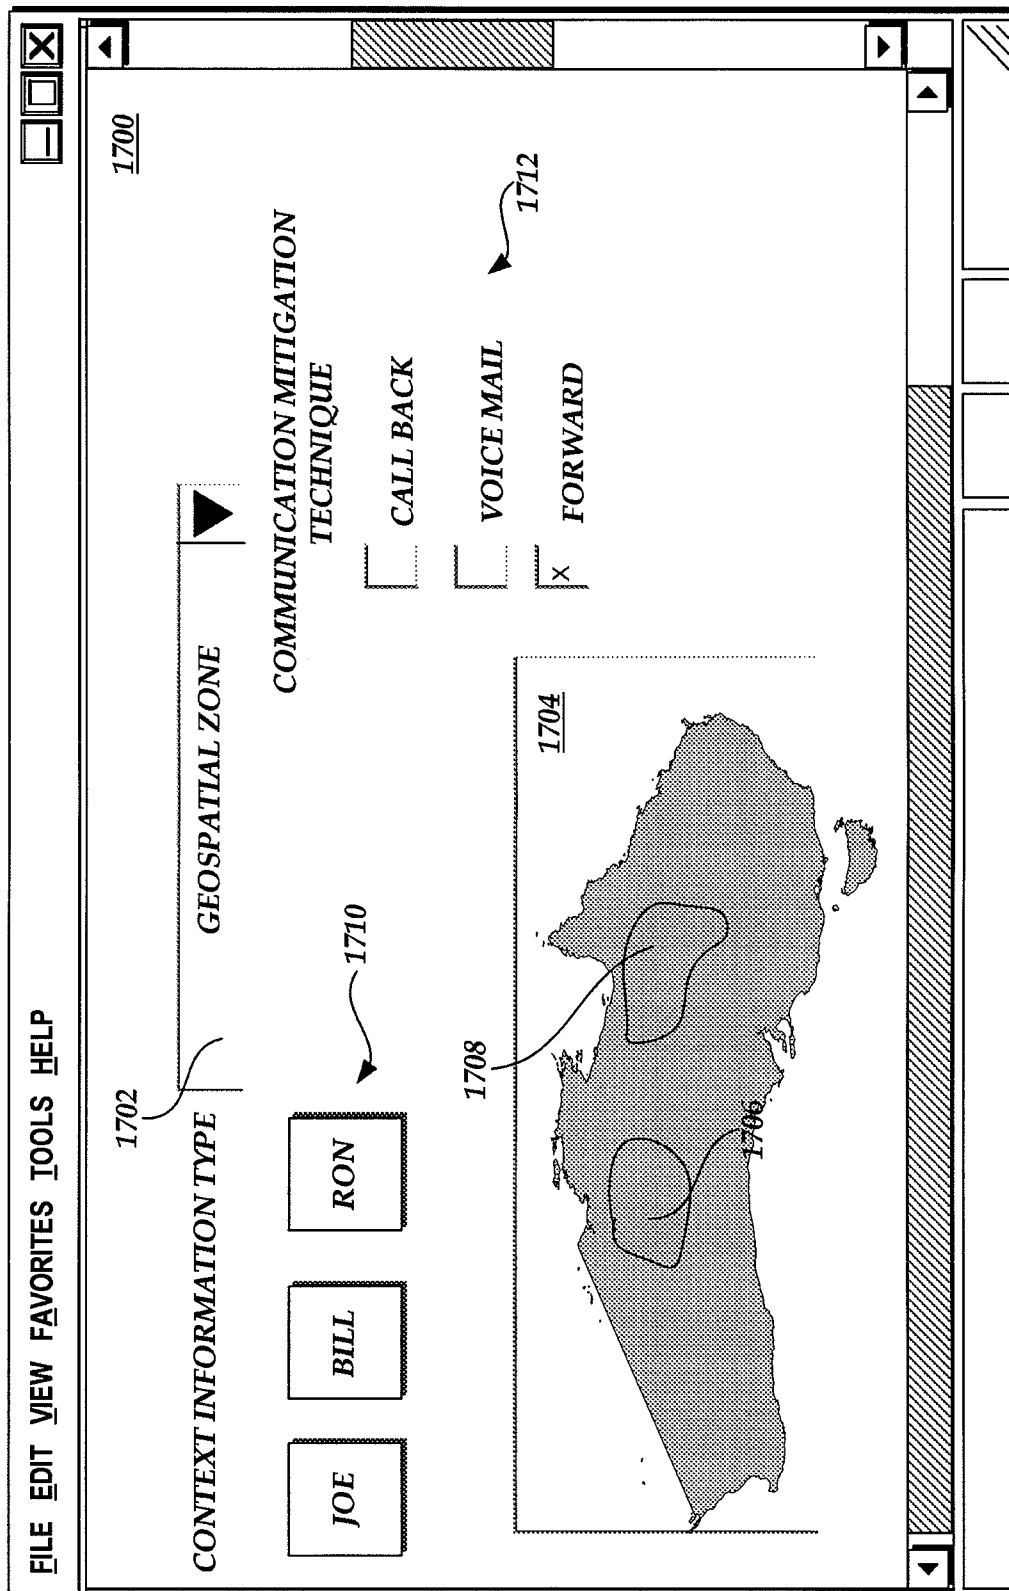


Fig. 17.

U.S. Patent

Feb. 3, 2015

Sheet 26 of 26

US 8,948,784 B2

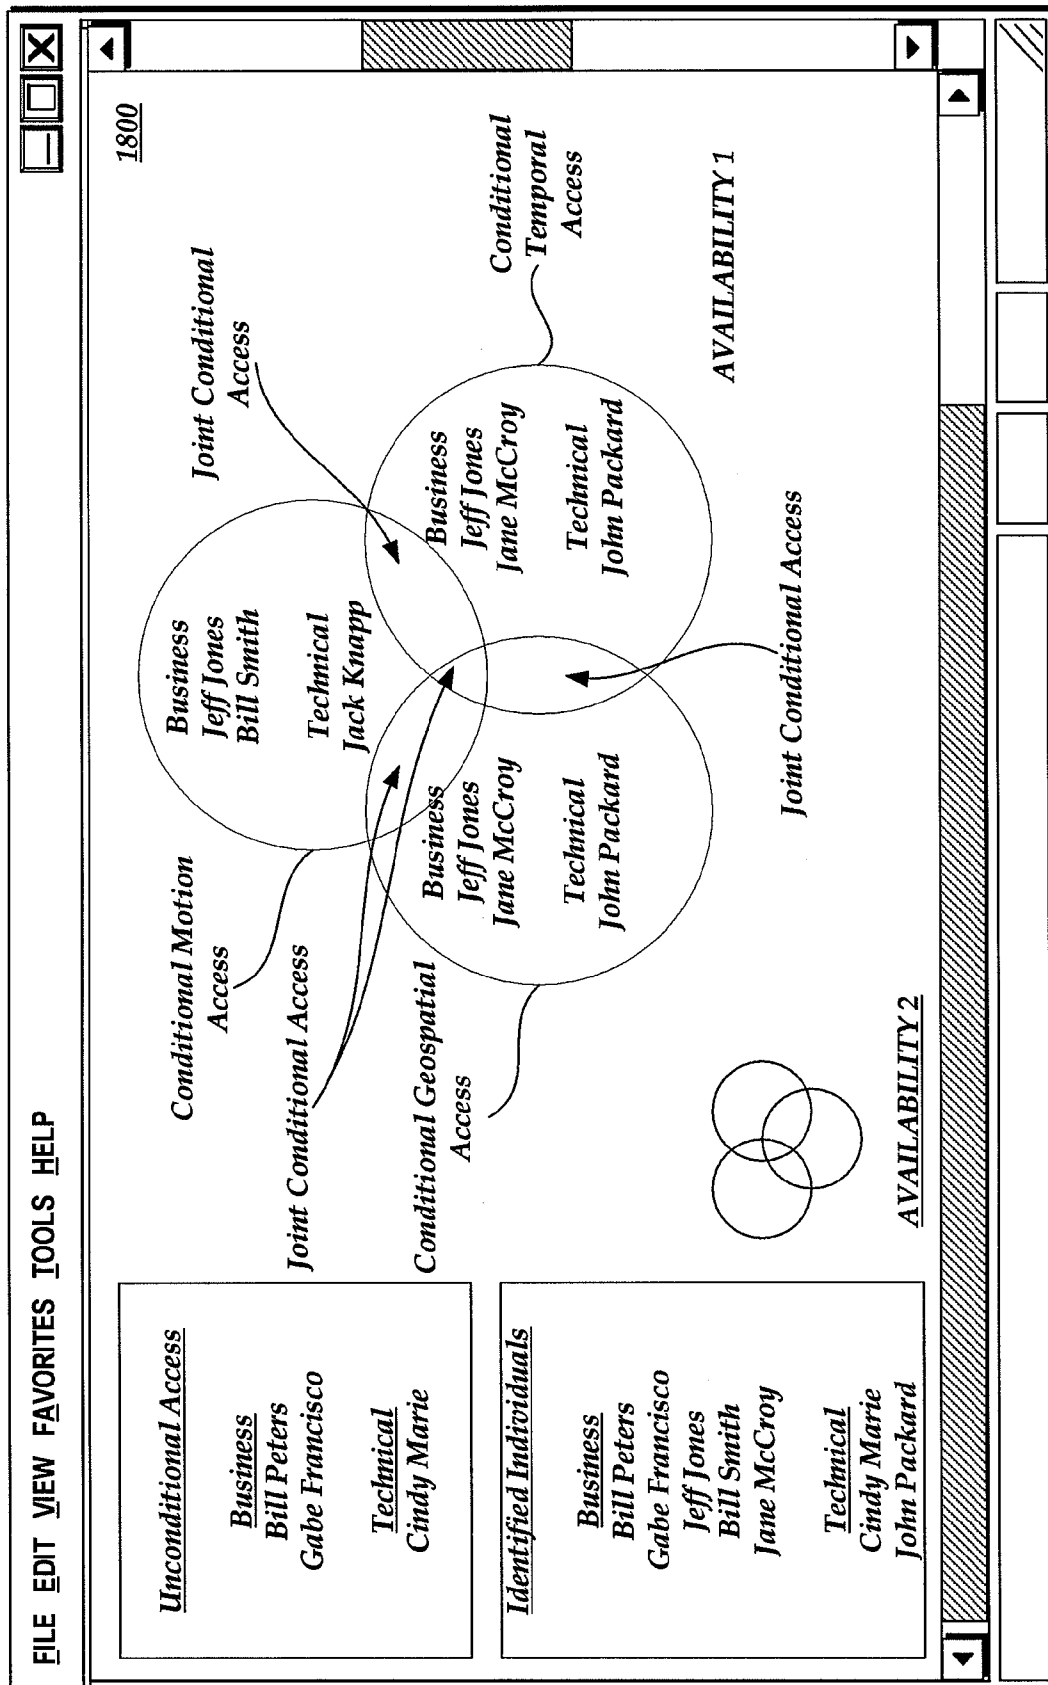


Fig. 18.

US 8,948,784 B2

1

MONITORING GEOSPATIAL CONTEXT OF A MOBILE DEVICE

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 12/040,818, entitled "SYSTEM AND METHODS FOR MONITORING THE GEOSPATIAL CONTEXT ASSOCIATED WITH A MOBILE COMMUNICATION DEVICE," filed Feb. 29, 2008, which claims the benefit of U.S. Provisional Application No. 60/892,628, entitled "ENHANCED CELLULAR MOBILITY CALL AND SESSION MANAGEMENT," filed on Mar. 2, 2007, the entireties of which are hereby incorporated herein by reference.

BACKGROUND

1. Technical Field

The disclosure relates generally to mobile communication devices and communication management systems and to systems, methods and interfaces for management of mobile communication devices utilizing communication profiles and mobile communication device contexts.

2. Description of the Related Art

Generally described, mobile communication devices, such as mobile phones, facilitate audio and data communications for users. In one aspect, users can utilize a mobile communication device for audio and data communication without reference to the particular environment in which they are attempting to utilize the mobile communication device. For example, a stationary user can utilize a mobile phone in an area in which use of the phone does not necessarily pose a safety issue to the user or other individuals in the nearby area. In another aspect, however, the particular environment surrounding the user and/or use of the mobile communication device in the particular environment can impact the use of the mobile communication device, the safety of the specific users, and/or the safety of other individuals.

By way of example, driver distraction can be responsible for a large and growing number of road traffic accidents. One increasing cause of driver distraction is the operation of a mobile communication device while driving, such as for the purposes of audio conversation. As applied to driving (and other activities), the distraction associated with operation of a mobile communication device can be characterized in terms of the mechanical operation of the device (e.g., dialing numbers on a keypad to initiate a call) and/or the cognitive load of the subsequent communication session (voice communications and/or operation of the device). Additionally, the continued evolution of mobile communication devices into multifunctional components, such as for text messaging, image and video capture, handheld gaming, etc., will only continue to increase the potential for operator distraction and/or additional cognitive load on users during operation of the mobile communication device.

One approach to limit the operation of mobile communication devices relates to the utilization of control algorithms in vehicles to limit the use of cellular phones or cellular components. In an illustrative embodiment, a control algorithm can allow or deny communication based on monitoring various environmental sensors, such as the placement of a parking brake, the detection of a vehicle in gear, vehicle velocity and/or a distance traveled. This approach, however, can be inefficient in that the sensor information, such as vehicle velocity and/or distance traveled by itself, is not necessarily indicative of the appropriateness of use of a mobile

2

communication device. For example, urban or city driving conditions in which there is heavy traffic can oftentimes result in low traveled distance and/or low velocities with frequent stops. Under a pure measured velocity approach, the mobile device may be allowed to operate if the vehicle is stopped, although use of a mobile communication device for such city driving conditions may not be preferable. Thus, the traditional velocity/distance approaches may be inefficient in distinguishing urban driving conditions from a person in a parked car by measuring velocity and/or distance traveled.

Another approach to limit the operation of mobile communication devices relates to the utilization of control algorithms that utilize third party information sources, such as software calendaring programs, to determine an availability of a user to receive communications. In an illustrative embodiment, a control algorithm can intercept, or otherwise, receive, a request from a third party to initiate an audio communication with a mobile communication device. The control algorithm can then poll the mobile communication device and/or additional third party information sources to determine the availability for establishing the audio communication. For example, if the control algorithms polls a third party calendaring software application and determines that the user associated with the mobile communication devices is at an appointment, the control algorithm may prevent the audio communication from being established. These approaches, however, can become inefficient by increasing communication initiation latencies by requiring a synchronous polling of the mobile communication device for availability. Additionally, these approaches generally do not facilitate management of outgoing communications by a user of a mobile device and/or the continued management of the mobile communication device once a communication channel has been established.

SUMMARY

Systems, methods and interfaces for managing communications associated with a mobile communication device are provided. In one embodiment, mobile communication devices process environmental inputs and utilize context assessment algorithms that process environment inputs from a variety of sensors and/or information sources into mobile device context information. Examples of the context assessment algorithms include various travel state context assessment algorithms, various geospatial (or geofence) location context assessment algorithms, and the like. In at least some cases, the context assessments reflect a degree of user risk associated with using the mobile communication device to engage in an interactive communication session, such as a voice call or a text messaging session.

As appropriate, the mobile communication device transmits the processed context information to a communication management system. For example, the mobile communication device may transmit context information upon a change from a previously determined context. Additionally, the mobile communication device can continue to transmit updated context information or changes in context information to the communication management system while a user communication session is in progress.

The communication management system uses the received context information, preferably in combination with profiles associated with particular mobile devices and users, to make decisions regarding how to manage communication session requests and/or ongoing communication sessions. For example, in one embodiment, the communication management system determines how to route or otherwise process an

US 8,948,784 B2

3

incoming call to a mobile communication device using context information already received from the mobile device, without having to poll the mobile device for its context; thus, the incoming call can be processed rapidly. Information regarding the identity of the caller and/or the electronic calendar of the callee may also be considered. If the communication management system determines that the mobile communication device is not available to establish a requested communication channel/session, the communication management system can provide communication channel mitigation options such as interaction with voicemail components, interactive voice response components, and the like.

In some embodiments, the communication management system can facilitate the provisioning and management of at least some of the aspects of the mobile communication device profile information through the presentation of various graphical user interfaces generated over a communication network, such as the Internet, and/or from user interaction via the mobile communication device.

Neither the foregoing summary nor the following detailed description purports to define the invention. The invention is defined by the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing aspects and many of the attendant advantages of this invention will become more readily appreciated as the same become better understood by reference to the following detailed description, when taken in conjunction with the accompanying drawings, wherein:

FIG. 1 is a block diagram illustrative of one embodiment of a communication management environment including a communication management system and a number of mobile communication devices;

FIG. 2 is a block diagram illustrative of aspects of the communication management system of FIG. 1 in an embodiment of the communication management environment;

FIG. 3 is a block diagram illustrative of aspects of the mobile communication device of FIG. 1 in an embodiment of the communication management environment;

FIGS. 4A-4C are block diagrams of the communication management system of FIG. 1 illustrating the transmission of mobile communication device context information by a mobile device and the processing by the communication management system of communication channel initiation requests submitted by a third party communication device;

FIG. 5 is a block diagram of one embodiment of a travel state context assessment algorithm state machine implemented by a mobile communication device in providing mobile communication device context information to a communication management system;

FIG. 6 is a block diagram of another embodiment of a travel state context assessment algorithm state machine implemented by a mobile communication device in providing mobile communication device context information to a communication management system;

FIG. 7 is a block diagram of another embodiment of a travel state context assessment algorithm state machine implemented by a mobile communication device in providing mobile communication device context information to a communication management system;

FIG. 8 is a block diagram of one embodiment of a geospatial context assessment algorithm state machine implemented by a mobile communication device in providing mobile communication context information to a communication management system;

4

FIG. 9 is a block diagram of another embodiment of a geospatial context assessment algorithm state machine implemented by a mobile communication device in providing mobile communication context information to a communication management system;

FIGS. 10A-10C are block diagrams of the communication management system of FIG. 1 illustrating the transmission of mobile communication device context information by a mobile device and the processing by the communication management system of communication channel initiation requests submitted by the mobile communication device;

FIG. 11 is a block diagram of the communication management system of FIG. 1 illustrating the transmission of updated mobile communication device context information by a mobile communication device and the processing of an ongoing communication channel by the communication management system;

FIGS. 12A-12E are flow diagrams illustrative of travel state context assessment algorithm implemented by a mobile communication device in providing mobile communication device context information to a communication management system;

FIG. 13 is a block diagram illustrative of a mobile communication device context management state diagram implemented by a mobile communication device for managing context information;

FIG. 14 is a flow diagram illustrative of a geospatial context assessment algorithm implemented by a mobile communication device in providing mobile communication context information to a communication management system;

FIG. 15 is a flow diagram illustrative of a communication management routine implemented by a communication management system for managing communications according to mobile communication device context information;

FIG. 16 is a block diagram illustrative of communication channel session state diagram implemented by a communication management component for managing communication channels;

FIG. 17 is a block diagram illustrative of a screen display of a user interface for obtaining mobile communication device profile information for managing mobile communication device availability based on mobile communication device context information; and

FIG. 18 is a block diagram illustrative of a screen display of a user interface for obtaining mobile communication device profile information for managing mobile communication device availability based on mobile communication device context information.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

The description in this specification is dedicated to the memory of Joe Teater.

A system will now be described that embodies various inventive features related to the management of communications with a mobile communications device. As will be recognized, many of these features can be used independently of others, and represent distinct inventions. Further, many of the features can be implemented differently than described herein. Thus, nothing in this detailed description implies that any particular feature, component, process step, characteristic, or combination of the foregoing is essential.

Generally described, embodiments of the present invention correspond to systems, methods and interfaces for the management of communications with a mobile communication device. Specifically, aspects of the present invention relate to

US 8,948,784 B2

5

the management of communications through the utilization of mobile communication device profiles, mobile communication device context information, and/or caller identification information to manage communications.

The mobile communication devices continuously collect, or otherwise obtain, various inputs corresponding to a mobile communication device environment. The mobile communication device processes some or all of the inputs with a context assessment algorithm to generate mobile communication device context information. The mobile communication device transmits the context information to a communication management system through a variety of communication methods/channels. The mobile communication device can limit the transmission of context information to the communication management system such that context information is transmitted upon determination of a change in a previous mobile communication device context. Additionally, the mobile communication device continues to transmit updated context information or updates to context information throughout various modes of operation, including during an established communication.

The communication management system utilizes the mobile communication device context information to determine communication device availability by processing the context information with a mobile communication device profile. The mobile communication device profiles can specify what communication channels are available for particular mobile communication device contexts. Additionally, the mobile communication device profiles can be a function of identification information, such as caller ID. Still further, the communication device profiles can specify communication channel mitigation options that can include a suggestion of alternative communication channels or other messages, the presenting of interactive response systems, and/or the initiation of actions in the event the mobile communication device is not available to maintain a requested communication channel or an existing communication channel.

For subsequent communication requests initiated by the user of the mobile communication device and/or a third party, the communication management system processes the request according to the prior determined communication availability selected as a function of appropriate selection information, such as the caller ID of the third party. Additionally, in the event of a change of a mobile communication device context during a previously established communication channel that changes communication availability, the communication management system can implement specified communication channel mitigation actions, which can include the modification or termination of the existing communication channel.

Although aspects of the system will be described to the drawings, flow diagrams, screen interfaces, and specific examples, one skilled in the relevant art will appreciate that the disclosed embodiments are illustrative in nature. Accordingly, the disclosed embodiments should not be construed as limiting.

Communication Management Environment

With reference now to FIG. 1, a block diagram illustrative of a communication management environment **100** for managing mobile communication device communications will be described. As illustrated in FIG. 1, the communication management environment **100** includes a communication management system **102** for processing requests for establishing a communication channel between a supported mobile device and a third party communication device. The communication management system **102** maintains mobile communication device profiles that are provisioned to establish the availabil-

6

ity for the mobile communication device to establish a communication channel as a function of mobile communication device context information. The communication device profiles may also be provisioned as a function of identification information of an applicable third party. As will also be described in greater detail below, the communication management system **102** determines the availability of the mobile device to establish a communication channel asynchronously to any request to establish a communication channel.

To manage requested communications or previously established communication channels, the communication management system **102** communicates with corresponding subsystems responsible for establishing the wireless communication channel, such as mobile switching center **108**, and utilizes the predetermined availability information and appropriate identification information to allow/reject communications. The communication management system **102** can communicate with the mobile switching center **108** via a direct communication connection, a secure communication channel via a communication network, such as communication network **114**, or via a public communication network.

Additionally, the communication management system **102** provides communication channel mitigation options in the event that the mobile communication device is unavailable, which can include interfacing with a communication mitigation components **103**, such as a voice mail system or an interactive voice response system. Still further, the communication management system **102** facilitates the generation of various graphical user interfaces for provisioning and/or managing mobile communication device profiles via computing devices **116**. Illustrative components of the mobile communication management system will be described in greater detail with regard to FIG. 2.

With continued reference to FIG. 1, the communication management environment **100** can include a number of mobile communication devices **104**. The mobile communication devices **104** can correspond to wide variety of devices or components that are capable of initiating, receiving or facilitating communications over a communication network including, but not limited to, personal computing devices, hand-held computing devices, integrated components for inclusion in computing devices, home electronics, appliances, vehicles, and/or machinery, mobile telephones, modems, personal digital assistants, laptop computers, gaming devices, and the like. In an illustrative embodiment, the mobile communication devices **104** include a wide variety of software and hardware components for establishing communications over one or more communication networks, including wireless or wired mobile communication networks **106**. The mobile communication devices **104** can be associated with one or more users for managing communication channel requests and existing communication channels according to mobile communication device contexts. Illustrative components of a mobile communication device will be described in greater detail with regard to FIG. 3.

With continuing reference to FIG. 1, an illustrative communication management environment **100** can include a number of additional components, systems and/or subsystems for facilitating communications with the mobile communication devices **104** and/or the communication management system **102**. The additional components can include one or more mobile switching centers **108** for establishing communications with the mobile communication devices **104** via the mobile communication network **106**, such as a cellular radio access network, a wireless network based on the family of IEEE 802.11 technical standards ("WiFi"), a wireless net-

US 8,948,784 B2

7

work based on IEEE 802.16 standards ("WiMax"), and other wireless networks. The operation of mobile communication networks, such as mobile communication network **106** are well known and will not be described in greater detail.

As illustrated in FIG. 1, the mobile switch center **108** includes interfaces for establishing various communications with via the communication network **114**, such as the Internet, intranets, private networks and point-to-point networks. In one example, the mobile switch center **108** can include interfaces for establishing communication channels with various communication devices **112**, such as landline telephones, via a public switched telephone network (PSTN) **110**. The mobile switch center **108** can include interfaces for establishing communication channels with various communication network-based communication devices **112**, such as a VoIP communication device. Still further, the mobile switch center **108** can include interfaces for establishing communication channels with a mobile-based communication device **112**, such as another mobile communication device. For example, the communication devices **112** can correspond to a third-party mobile communication that establishes an audio communication channel with a mobile communication device **104**. Accordingly, although communication network **114** is illustrated as a single communication network, one skilled in the relevant art will appreciate that the communication network can be made up of any number of public or private communication networks and/or network connections.

The various communication devices **112** can include the hardware and software components that facilitate the various modes of operation and communication, such as via wired and wireless communication networks. Additionally, the computing devices **116** can include various hardware and software components, such as a browser software application, that facilitate the generation of the graphical user interfaces for provisioning and managing mobile communication device profiles as will be described below.

One skilled in the relevant art will appreciate that the components and configurations provided in FIG. 1 are illustrative in nature. Accordingly, additional or alternative components and/or configurations, especially regarding the additional components, systems and subsystems for facilitating communications may be utilized.

With reference now to FIG. 2, illustrative components for the communication management system **102** will be described. Although the operation of the various functions associated with the communication management system **102** will be described with regard to below subcomponents, one skilled in the relevant art will appreciate that the subcomponents are illustrative in nature. Accordingly, a communication management system **102** may include additional components or alternative components to facilitate one or more functions. Additionally, although the various subcomponents are illustrated as integrated into a communication management system **102**, one or more of the components may be implemented in a distributed manner over a communication network and/or be implemented as a network service, e.g., a Web service.

As illustrated in FIG. 2, the communication management system **102** includes a mobile device communication component **202** for establishing communications with a mobile communication device **104**. In an illustrative embodiment, the mobile device communication component **202** corresponds to a component for facilitating the bi-lateral transfer of data, such as mobile device context information, context assessment algorithms, etc., between the mobile communication device **104** and the communication management system **102**. The mobile device communication component **202**

8

can include software and hardware components necessary to establish one or more communication channels corresponding to various communication protocols such as Bluetooth, the family of IEEE 802.11 technical standards ("WiFi"), the IEEE 802.16 standards ("WiMax"), short message service ("SMS"), voice over IP ("VoIP") as well as various generation cellular air interface protocols (including, but not limited to, air interface protocols based on CDMA, TDMA, GSM, WCDMA, CDMA2000, TD-SCDMA, WTDMA, LTE, OFDMA and similar technologies).

The communication management system **102** can also include a communication processing component **204** for determining the availability of a mobile communication device **104** for communication channels based on processing mobile communication device context information according to a mobile communication device profile. The communication processing component **204** can execute various processes or algorithms for processing transmitted mobile communication device context information to determine mobile communication device availability. Additionally, the communication processing component **204** can also manage the various context assessment processes or algorithms and updates to existing previously stored context assessment processes and algorithms that are transmitted and executed by the mobile communication devices **104**. Still further, the communication processing component **204** processes requests for communications between the mobile communication device **104** and third parties based on the predetermined availability information and identification information (e.g., the caller ID of a specific third party caller).

With continued reference to FIG. 2, the communication management system **102** can include a communication mitigation component **206** for processing alternative communication options if a requested communication channel is unavailable or if an existing communication is to be terminated due to a change in mobile communication device context. As previously discussed, the communication mitigation component **206** can interface with existing communication components, or subsystems, such as mitigation components **103** for providing user voicemail functionality or accessing existing voicemail services hosted by the mobile switching center **108**. Additionally, the communication mitigation component **206** can provide additional data and/or instructions for establishing alternative communication channels between the mobile device and a third party communication device **112**, such as providing interactive voice response functionality, as will be explained in greater detail below. Still further, the communication management system **102** can include a mobile service provider communication component **208** for processing requests for establishing communications, which includes indicating to a mobile switching center **108** whether to allow a requested communication channel to be established and/or indicating whether to terminate an existing communication channel.

The communication management system **102** can further include a mobile communication device profile data store **210** for maintaining mobile communication device profiles. The mobile communication device profile data store **210** may be one or more databases configured to provide the communication processing component **204** required data to determine mobile communication device availability according to mobile communication device context. As will be described in greater detail below, the mobile communication device profile data defines the availability of the mobile communication device **104** as a function of a current mobile communication device context. A mobile communication device profile can be defined such that the determined mobile

US 8,948,784 B2

9

communication device applicability will be applicable to all third party users, groups of users or specific users. For example, profiles can be associated with a telephone number such that the communication management system **102** can select an appropriate profile (and its predetermined availability) based on identification information associated with a communication request, such as caller identity information. Accordingly, the mobile communication device profile information in the communication device profile data store **210** can be stored in a manner that facilitates that faster retrieval according to identification information, as will be described in greater detail below.

With continued reference to FIG. 2, the communication management system **102** can also include a mobile communication device context data store **212** for maintaining mobile communication device context information previously transmitted by the mobile communication devices **104** and/or for maintaining the mobile communication device context assessment algorithms utilized by the mobile communication devices to process inputs into mobile communication device context. In one embodiment, the mobile communication device context information may be accessible, or otherwise published, to other computing devices, network based services, or users via the communication network **114**.

With reference now to FIG. 3, illustrative components for the mobile communication device **104** will be described. Although the operation of the various functions associated with the mobile device **104** will be described with regard to below components, one skilled in the relevant art will appreciate that the components are illustrative in nature. Accordingly, a mobile device **104** may include additional components or alternative components to facilitate one or more functions. Additionally, although the various subcomponents are illustrated as integrated into a mobile device **104**, one or more of the components may be implemented in a distributed matter over a communication network and/or be implemented as a network service, e.g., a Web service.

As illustrated in FIG. 3, the mobile device **104** includes a communication management system communication component **302** for facilitating communications with the communication management system **102**. As described above with regard to the mobile device communication component **202** (FIG. 2), the communication management system communication component **302** facilitates the bi-lateral transfer of data between the mobile communication device **104** and the communication management system **102**. One skilled in the relevant art will appreciate that the communication management system communication component **302** can include software and hardware components necessary to establish one or more communication channels corresponding to various communication protocols for establishing the bi-lateral communication channels. Moreover, although the communication management system communication component **302** is illustrated as a separate component, the functionality of the component may be integrated, or otherwise combined, with one or more hardware or software components utilized by the mobile communication device **104** to make communication channels (e.g., cellular communication channels or SMS communication channels as part of the designed function of the mobile device).

As will be described in greater detail below, the communication management system communication component **302** transmits current mobile device context information in accordance with the context assessment algorithms on the mobile device **104**. Once a current mobile communication device context is established, the communication management system **302** can limit additional transmission of context

10

information upon detection of a change in mobile communication context information. Additionally, in an alternative embodiment, the communication management system communication component **302** may also transmit, or otherwise publish, mobile communication device context information to additional recipients, such as communication network resources such as Web sites or network services, and/or to other peer destinations.

The mobile communication device **104** can also include a mobile communication device context information component **304** for processing a set of inputs corresponding to a mobile device environment to determine mobile device context information. Illustrative context assessment algorithms or processes for determining mobile device context information will be described in greater detail below. The mobile communication device contexts can identify or describe aspects of the mobile communication device **104**, aspects of the mobile communication device environment, and/or aspects of the user associated with the mobile communication device. For example, the mobile communication device context corresponds to a determination of various states of movement/travel, such as in a non-transitory state, an in-transit state (including city/urban travel transit, highway transit, and in-flight transit states), a journey onset state, and a journey termination state. In another example, the mobile communication device context corresponds a determination of whether a mobile communication device's present location is within a geospatial boundary, also referred to as geofencing, (including within the geospatial boundary, on a border of the geospatial boundary, or outside the geospatial boundary). One skilled in the relevant art will appreciate that the identified mobile device contexts are not exhaustive and that any number of additional mobile device contexts, or variations of the identified mobile communication device contexts, may also be defined for the mobile communication device **104**.

With continued reference to FIG. 3, the mobile communication device **104** can also include a mobile communication device environment interface **306** for obtaining inputs corresponding to a mobile communication device environment. In an illustrative embodiment, the set of inputs can include information from one or more sensors such as a global position sensor (GPS) component or other location identification components, accelerometers, altimeters, compasses, gyroscopes, microphones, scales or other weight detection mechanisms, range finders, proximity sensors, gas or radiation detectors, electric current or electric induction detection, digital image sensors, thermometers and the like. Additionally, the set of inputs can correspond to information obtained from communication network based resource such as calendaring information, identity or contact information and the like.

In one embodiment, the set of inputs include information from sensors or information gathering components that are integrated or attached to the mobile computing device **104**. In another embodiment, the set of inputs include information from external sensors or information gather components that provide the information via a communication channel, such as a hardwired connection or wireless connection (e.g., Bluetooth). Still further, in another embodiment, the set of inputs include information related to sensors or processed information from another device or article of manufacture associated with the mobile communication device. For example, the set of inputs can include information from a vehicle computer indicating information about the operation/condition of the vehicle and/or environmental information. Additional information from seat sensors may be able to inform that the remote end user is indeed a passenger and not a driver, and further, that seat belts are engaged. Still further, in another

US 8,948,784 B2

11

embodiment, the set of inputs include information from sensors that can be repurposed, such as through additional processing, to determine mobile communication device context information. For example, image data from a camera sensor or signal data from a transceiver chipset may be utilized as inputs to a context assessment algorithm to determine mobile communication device context. The above provided identification of the specific types of sensors is not exhaustive. Accordingly, additional or alternative sensors may be utilized to provide information for determining mobile communication device context information.

One skilled in the relevant art will appreciate that the set of inputs may be selected to correspond specifically to the particular algorithms utilized to calculate mobile communication device context. In one example, microphonic sensors may be used for detecting high noise levels from the embedded device microphone and using this context to permit only high importance work related calls and data session requests that pertain to the current work function. Furthermore, the mobile device context information can be utilized to inform the calling party that the callee is in a high noise environment and that a text message may be a more appropriate. In another example, the sensor information can correspond to a determination whether a Bluetooth headset or alternative hands free device is active in accordance with a corporate policy and local jurisdiction law. In still a further example, radiation detector sensor information could be utilized to detect increases in radioactive levels. The context could be utilized to immediately instruct the call and data session management control to connect the mobile end users with an emergency response team and autonomously report existing location and radiation levels just in case the mobile end user is incapacitated by some external cause.

In still a further example, gas or substance detector sensors could be utilized to detect an increase in gas or substance levels. The context could be utilized to immediately instruct the call and data session management control to connect the mobile end users with an emergency response team and autonomously report existing location and gas and substance levels just in case the mobile end user is incapacitated by some external cause. In yet another example, utilization near field inductive techniques sensors could be utilized to detect the process of charging via near field inductive components. The context could be used such that a call and data session management entity should perhaps be reroute calls and data session requests to different devices.

In still another example, proximity sensor information could be used to determine a context that the user is currently interacting in a specific manner with the mobile end device may enable specific call and data session management decisions to be critically enabled. In a further example, image data from a mobile device camera may be utilized via signal context assessment algorithms to determine the user's environment. In another example, user configurable keys/control sensor data can be utilized to customize mobile device context information, such as using soft keys, to register specific contexts provided by the mobile communication device user (e.g., "watch me," "help," etc.).

The mobile communication device **104** can further include a mobile communication device data store **308** for storing input information from the mobile communication device environment interface **306**, context information generated by the mobile communication device processing component **304** and/or the various context assessment algorithms or processes used by the mobile communication device processing component to generate the mobile communication device context information.

12

With reference now to FIG. **4-6**, the interaction between various components of the communication management environment **100** of FIG. **1** will be illustrated. For purposes of the example, however, the illustration has been simplified such that many of the systems, subsystems, and components utilized to facilitate communications are not shown. One skilled in the relevant art will appreciate that such components or subcomponents can be utilized and that additional interactions would accordingly occur without departing from the spirit and scope of the present invention.

With reference now to FIGS. **4A-4C**, one embodiment related to the processing of a request from a third party communication device **112** to establish a communication channel, such as an audio call, will be described. For purposes of the illustrative example, a particular mobile computing device **104** has registered with a communication management service that provides the communication management system **102**. Additionally, a user of the mobile device **104** has provisioned a mobile communication device profile that identifies the availability of the mobile communication device as a function of mobile communication device contexts and third party identification information. Alternatively, some portion the mobile communication device profile may be pre-provisioned for the user and/or automatically set by an administrator, such as a service provider.

As illustrated in FIG. **4A**, during the operation of the mobile communication device **104**, or during an initialization of the mobile communication device, the mobile communication device interface component **306** obtains a set of inputs corresponding to the mobile communication device environment. The set of inputs are processed by the mobile communication device context processing component **304** to generate mobile communication device context information. The communication management system communication component **302** then transmits the mobile communication device context information to the communication management system **102** as appropriate. Specifically, to reduce power consumption and/or bandwidth consumption, the communication management system communication component **302** may limit the transmission of mobile communication device context information for the initialization of a mobile communication device context, a detection of a change in mobile communication device context and/or for the re-establishment of a mobile communication device context.

Upon receipt of the context information, the mobile device communication component **202** transmits the context information to the communication processing component **204** for processing. The communication processing component **204** obtains a corresponding, or applicable, mobile communication device profiles from the mobile communication device profile data store **210**. The communication processing component **204** may utilize one or more mobile communication device profiles to determine mobile communication device availability from the context information. Alternatively, a single mobile communication device profile may define availability for multiple mobile communication device contexts. The communication processing component **204** then determines the availability of the mobile communication device to establish a communication channel (either receipt of a request or the initiation of a request) based on the processing.

Thereafter, in the illustrative example of FIG. **4A**, a communication device **112**, such as a third party communication device **112** initiates a request to establish a communication channel with the mobile device **104**. The request is received by the mobile switching center **108** and is held pending an approval or rejection by the communication management

US 8,948,784 B2

13

system **102**. The applicable mobile switching center **108** then transmits the request to the mobile service provider communication component **208** to request a determination whether the requested communication channel should be established. The request can include additional information utilized by the communication management component **102** to select an appropriate profile, including caller identification information and the like.

With reference now to FIG. 4B, upon receipt of the request or notification from the mobile switching center **108**, the communication processing component utilizes the predetermined availability of the mobile communication device **104** to authorize or reject the establishment of the requested communication channel. If the request to initiate the communication channel is authorized, the authorization is transmitted to the mobile switching center **108**, which processes the request for initiation of the communication channel in an appropriate manner. Accordingly, the requested communication channel is completed. As will be described in greater detail below with regard to FIG. 15, the communication management system **102** may continue to monitor the established communication channel for a change in mobile communication device context and will manage the communication channel as defined in the applicable mobile communication device profile.

With reference now to FIG. 4C, alternatively, if the request for initiation of the communication channel is rejected based on a predetermined unavailability of the mobile communication device **104**, the communication management component **102** transmits a rejection authorization communication to the mobile switching center **108** to prevent the initiation of the communication channel. Additionally, the communication mitigation component **206** can provide appropriate communication mitigation, such as notifications to the users of the mobile communication device **104** and the communication device **112**. Additionally, the communication management component **102** can obtain a selection of a communication channel alternative defined in the mobile communication device profile, such as voicemail systems or interactive voice response systems, as will be described in greater detail below.

With reference now to FIGS. 5-9, state diagrams of illustrative context assessment algorithms will be presented. One skilled in the relevant art will appreciate that although specific states, variables, and thresholds are presented in FIGS. 5-9, the disclosure is not limited to the application of the illustrative context assessment algorithms. Additionally, the illustrative context assessment algorithms may also be applied with variations to the identified parameters. Accordingly, the illustrative context assessment algorithms should not be construed as limiting.

FIG. 5 is a block diagram of one embodiment of a travel state context assessment algorithm state machine implemented by a mobile communication device **104** in providing mobile communication device context information to a communication management system **102**. As will be explained in greater detail below with regard to FIG. 12, the algorithm may use one or more of the following parameters to determine mobile communication device **104** travel state context information, where the parameters, and thresholds identified in FIG. 5 are represented by:

Motion Parameters

ΔXY	distance traveled over time interval
Velocity	current instantaneous velocity
$\Delta lat-long$	proxy for distance traveled over time interval
σvel	variation in velocity over the last N observation

14

-continued

σxy	variation in displacement over the last Nvar observations
Bearing	bearing
$\sigma bearing$	variation in bearing over the last Nvar observations

Thresholds

Min Δxy	minimum distance to be traveled in an interval
Min V	minimum velocity threshold
Max V	maximum velocity threshold
Min $\Delta xy-city$	minimum distance to be traveled in an interval for city/urban driving
Min $\Delta xy-highway$	minimum distance to be traveled in an interval for highway driving
Vcity	minimum velocity threshold for city/urban driving
Vhighway	minimum velocity threshold for highway driving
$\sigma xy-city$	city/urban driving displacement variance threshold
$\sigma xy-Hwy$	highway driving displacement variance threshold
$\sigma xy-flight$	aircraft flight displacement variance threshold
$\sigma V-city$	city/urban driving velocity variance threshold
$\sigma V-Hwy$	highway driving velocity variance threshold
$\sigma bearing-city$	city/urban driving bearing variance threshold
$\sigma bearing-hwy$	highway driving bearing variance threshold

Intervals & Counters

Long	typically 64 to 32 seconds, configurable, default = 48
Medium	typically 8 to 32 seconds, configurable, default = 24
Short	typically 8 to 2 seconds, configurable, default = 8
Counter	number of observations counter
MCount	Max count typically 4-12, default = 8
Nvar	number of observations required to compute variance

FIG. 6 is a block diagram of another embodiment of a travel state context assessment algorithm state machine implemented by a mobile communication device **104** in providing mobile communication device context information to a communication management system **102**. As will be explained in greater detail below with regard to FIG. 12, the algorithm may use one or more of the following parameters to determine mobile communication device **104** travel state context information, where the parameters, and thresholds identified in FIG. 6 are represented by:

Motion Parameters

ΔXY	distance traveled over time interval
Velocity	current instantaneous velocity
$\Delta lat-long$	proxy for distance traveled over time interval
σvel	variation in velocity over the last N observation
σxy	variation in displacement over the last Nvar observations
Bearing	bearing
$\sigma bearing$	variation in bearing over the last Nvar observations

Thresholds

Min Δxy	minimum distance to be traveled in an interval
Min V	minimum velocity threshold
Max V	maximum velocity threshold
Min $\Delta xy-city$	minimum distance to be traveled in an interval for city/urban driving
Min $\Delta xy-highway$	minimum distance to be traveled in an interval for highway driving
Min $\Delta xy-flight$	minimum distance to be traveled in an interval for aircraft flight
Vcity	minimum velocity threshold for city/urban driving

US 8,948,784 B2

15

-continued

Vhighway	minimum velocity threshold for highway driving
Vflight	minimum velocity threshold for aircraft flight
oxy-city	city/urban driving displacement variance threshold
oxy-Hwy	highway driving displacement variance threshold
oxy-flight	aircraft flight displacement variance threshold
σV-city	city/urban driving velocity variance threshold
σV-Hwy	highway driving velocity variance threshold
σV-flight	aircraft in-flight velocity variance threshold
obearing-city	city/urban driving bearing variance threshold
obearing-hwy	highway driving bearing variance threshold
obearing-flight	in-flight bearing variance threshold

Intervals & Counters

Long	typically 64 to 32 seconds, configurable, default = 48
Medium	typically 8 to 32 seconds, configurable, default = 24
Short	typically 8 to 2 seconds, configurable, default = 8
Counter	number of observations counter
MCount	Max count typically 4-12, default = 8
Nvar	number of observations required to compute variance

FIG. 7 is a block diagram of yet another embodiment of a travel state context assessment algorithm state machine implemented by a mobile communication device 104 in providing mobile communication device context information to a communication management system 102. As will be explained in greater detail below with regard to FIG. 12, the algorithm may use one or more of the following parameters to determine mobile communication device 104 travel state context information, where the parameters, and thresholds identified in FIG. 7 are represented by:

Motion Parameters

AXY	distance traveled over time interval
-----	--------------------------------------

Thresholds

Min Axy	minimum distance to be traveled in an interval
Min Axy-city	minimum distance to be traveled in an interval for city/urban driving
Min Axy-highway	minimum distance to be traveled in an interval for highway driving
Min Axy-flight	minimum distance to be traveled in an interval for aircraft flight

Intervals & Counters

Long	typically 64 to 32 seconds, configurable, default = 48
Medium	typically 8 to 32 seconds, configurable, default = 24
Short	typically 8 to 2 seconds, configurable, default = 8
Counter	number of observations counter
MCount	Max count typically 4-12, default = 8

FIG. 8 is a block diagram of one embodiment of a geospatial context assessment algorithm state machine implemented by a mobile communication device 102 in providing mobile communication context information to a communication management system 102. As will be explained in greater detail below with regard to FIG. 14, the algorithm may use one or more of the following parameters to determine mobile communication device 104 geospatial context information, where the parameters, and thresholds identified in FIG. 8 are represented by:

16

Geo-Spatial Parameters

AXYc	distance between geo-fence centroid and current location
Bearing	Bearing between geo-fence centroid and current location
Bearing List	List of bearings and displacements that define a geo-spatial region, a geo-fence.

Thresholds

Max radius	minimum distance to be traveled in an interval
Min radius	minimum velocity threshold
Min-AXY	minimum displacement between location observations

Intervals & Counters

Long	typically 64 to 32 seconds, configurable, default = 48
Medium	typically 8 to 32 seconds, configurable, default = 24
Short	typically 8 to 2 seconds, configurable, default = 8
Interval counter	duration counter in seconds between observations

FIG. 9 is a block diagram of another embodiment of a geospatial context assessment algorithm state machine implemented by a mobile communication device 102 in providing mobile communication context information to a communication management system 102. As will be explained in greater detail below with regard to FIG. 14, the algorithm may use one or more of the following parameters to determine mobile communication device 104 geospatial context information, where the parameters, and thresholds identified in FIG. 8 are represented by:

Geo-Spatial Parameters

AXYc	distance between geo-fence centroid and current location
Bearing	Bearing between geo-fence centroid and current location
Bearing List	List of bearings and displacements that define a geo-spatial region, a geo-fence.

Thresholds

Max radius	minimum distance to be traveled in an interval
Min radius	minimum velocity threshold
Min-AXY	minimum displacement between location observations

Intervals & Counters

Long	typically 64 to 32 seconds, configurable, default = 48
Medium	typically 8 to 32 seconds, configurable, default = 24
Short	typically 8 to 2 seconds, configurable, default = 8
Interval counter	duration counter in seconds between observations

With reference now to FIGS. 10A-10C, one embodiment processing of a request from a user at a mobile communication device 104 to establish a communication channel, such as an audio call, with a third party communication device 112 will be described. As described above with regard to FIGS. 4A and 4B, for the illustrative example, it is assumed that a particular mobile computing device 104 has registered with a communication management service that provides the communication management system 102 and provisioned a mobile communication device profile that identifies the availability of the mobile communication device for particular mobile communication device contexts.

US 8,948,784 B2

17

As illustrated in FIG. 10A, during the operation of the mobile communication device 104, or during an initialization of the mobile communication device, the mobile communication device interface component 306 obtains a set of inputs corresponding to the mobile communication device environment. The set of inputs are processed by the mobile communication device context processing component 304 to generate mobile communication device context information. The communication management system communication component 302 then transmits the mobile communication device context information to the communication management system 102 as appropriate. Specifically, to reduce power consumption and/or bandwidth consumption, the communication management system communication component 302 may limit the transmission of mobile communication device context information for the initialization of a mobile communication device context, a detection of a change in mobile communication device context and/or for the re-establishment of a mobile communication device context. Examples of context assessment algorithms were previously identified with regard to FIGS. 5-9.

Upon receipt of the context information, the mobile device communication component 202 transmits the context information to the communication processing component 204 for processing. The communication processing component 204 obtains one or more corresponding, or applicable, mobile communication device profiles from the mobile communication device profile data store 210. The communication processing component 204 then determines the availability of the mobile communication device to establish a communication channel (either receipt of a request or the initiation of a request) based on the processing.

Thereafter, in the illustrative example of FIG. 10A, the mobile device 104 initiates a request to establish a communication channel with a communication device 112, such as a third party communication device 112. The request is received by the mobile switching center 108 and is held pending an approval or rejection by the communication management system 102. The applicable mobile switching center 108 then transmits the request to the mobile service provider communication component 208, along with additional information, such as the identification information (e.g., telephone number) of the third party communication device 112.

With reference now to FIG. 10B, upon receipt of the request or notification from the mobile switching center 108, the communication processing component obtains applicable communication profiles using the identification information or other information and utilizes the predetermined availability of the mobile communication device 104 to authorize or reject the establishment of the communication channel. If the request to initiate the communication channel is authorized, the authorization is transmitted to the mobile switching center 108, which processes the request for initiation of the communication channel in a typical manner. Accordingly, the requested communication channel is completed. As will be described in greater detail below with regard to FIG. 15, the communication management system 102 may continue to monitor the established communication channel for a change in mobile communication device context.

With reference now to FIG. 10C, alternatively, if the request for initiation of the communication channel is rejected based on a determined unavailability of the mobile communication device 104, the communication management component 102 transmits a rejection authorization communication to the mobile switching center 108 to prevent the initiation of the communication channel. Additionally, the communication mitigation component 206 can provide

18

appropriate notifications to the users of the mobile communication device 104 and the communication device 112. Additionally, the communication management component 102 can obtain a selection of a communication channel alternative as will be described in greater detail below.

With reference now to FIG. 11, in the event that a communication channel has been established between a mobile communication device 104 and a communication device 112, the communication management system 102 continues to determine the availability of the mobile communication device 104 to remain in the established communication channel. As illustrated in FIG. 11, the mobile communication device 104 continues to receive sensor information and determine mobile communication device context information. In the event that the mobile communication device context information has changed or is otherwise no longer valid, the communication management component 302 of the mobile device mobile transmits the updated mobile communication device context information to the communication management system 102. In one embodiment, the mobile device communication component 202 may only transmit updated context information in the event that a change in context is determined. Alternatively, the mobile device communication component 202 may transmit update context information after a predetermined time. Because the mobile device 104 has an established communication channel with the communication device 112, the communication management system communication component 302 may have to utilize a different communication channel (such as an SMS channel) to transmit the updated context information if the communication channel previously utilized to transmit the context information is being utilized for the established communication channel.

Upon receipt of the context information, the mobile device communication component 202 transmits the context information to the communication processing component 204 for processing. The communication processing component 204 obtains one or more corresponding, or applicable, mobile communication device profiles from the mobile communication device profile data store 210. The mobile communication device profile may be the same profile previously utilized to determine the availability of the mobile communication device or an additional or alternative mobile communication device profiles. As previously described, the selection of the appropriate or applicable profile stores can include the utilization of identification information, such as caller ID information. The communication processing component 204 then determines the availability of the mobile communication device to maintain the established communication channel based on the profiles. If it is determined to maintain the established communication channel, the communication management system 102 can transmit an authorization message or remain silent. Alternatively, if the communication channel should be terminated based on a determined unavailability of the mobile communication device 104, the mobile service provider communication component can transmit communication channel control information that includes a termination notification to the mobile switching center 108. Additionally, the communication mitigation component 206 can provide appropriate communication channel mitigation information, such as notifications to the users of the mobile communication device 104 and the communication device 112 and provide a selection of a communication channel alternative as will be described in greater detail below.

Mobile Device Context Assessment Algorithms

With reference now to FIGS. 12A-12E, an illustrative routine 1200 implemented by the mobile communication device context processing component 304 for determining context

US 8,948,784 B2

19

information of a mobile communication device **104** will be described. As described above, the mobile communication device context can correspond to a determination of a specific transit state indicative of a current mobile communication device environment. The availability for a communication channel may be based on the determined transit state and the appropriate mobile communication device profile. With reference to an above mentioned example, a user can provision a mobile device profile such that calls from an identified user are rerouted automatically to a voicemail system in the event that mobile device (e.g., the user) is in a city/urban transit state. As will be described, in event that the mobile communication device **104** determines it is currently in a city/urban transit state, the mobile communication device transmits the updated context information to the communication management component **102**, which determines the availability/unavailability information based on the updated context information for all profiles. Thereafter, calls from the identified users are rerouted automatically without the need to poll the mobile communication device **104** until the mobile communication device provides updated context information.

Examples of two transit state context algorithm state diagrams were presented with regard to FIGS. 5-7. However, one skilled in the relevant art will appreciate, however, that the specific algorithms and variables described in this disclosure, including the example state diagrams of FIGS. 5-7 and in routine **1200** (FIG. 12) are illustrative in nature and should not be construed as limiting. Accordingly, variations or alternatives may be implemented, such as the removal of one or more transit states, different progression of transit states, and the specific criteria utilized to transition between transit states are within the spirit and scope of the present invention.

With reference now to FIG. 12A, at block **1202**, the routine **1200** begins with the initialization of the transit state to non-transit by the mobile communication device context processing component **304**. In an illustrative embodiment, the non transit state is a first state indicative of when the mobile communication device **104** is powered on or begins tracking transit state. The initialization of the transit state to non transit may be transmitted to the communication management system **102** or may be assumed as the starting context for the mobile communication device **104**. At decision block **1204**, a test is conducted to determine whether minimum movement criteria have been satisfied based on processing the set of inputs. For example, the test can correspond to a review of velocity input(s) and distance traveled input(s) to determine whether the input values exceed a minimum threshold.

Velocity and distance information can be obtained by the mobile communication device through a variety of sensors and/or components designed to generate or calculate such information. Examples include, but are not limited to, GPS devices/components, accelerometers, navigational equipment, and the like. As previously described, the sensors and/or components may be integrated into the mobile communication device **104** or may be separate components (e.g., a car navigation system) that provide the input information via a wired or wireless connection.

In another example, the velocity and distance information may be calculated by the mobile communication device **104** through by the utilization of recognizable or detectable objects. In accordance with this example, the mobile communication device **104** receives signals generated by fixed transmitters, such as cellular communications base stations or WiFi wireless nodes, which generally include some identification information specific to the particular transmitter, such as an SSID for a wireless node. As a mobile communication device **104** travels, signals from specific transmitters are

20

detected when the mobile communication device is within range of the transmitter and no longer detected when the mobile communication device is beyond the range of the transmitter. For known communication ranges of transmitters, such as WiFi wireless nodes, velocity and distance traveled information may be calculated based on monitoring time from the detection of a signal from a transmitter to loss of the signal. Additionally, the detection of the signal from the transmitter would not require registration with the transmitter and could still be practiced with transmitters that restrict access, such as through encrypted transmissions.

If the minimum movement criteria have not been satisfied, it is assumed that the mobile communication device (considering its environment) is still in a non-transit state and the routine **1200** returns to block **1202**. The routine **1200** may continue to loop through this portion for any amount of time.

Alternatively, if the minimum movement criteria have been satisfied, it is assumed that the mobile communication device **104** (considering its environment) is in motion, and at block **1206**, the transit state is changed to a "journey onset state." Because the transit state has changed, the mobile communication device **104** may transmit updated context information to the communication management component **102** indicative of the change in transit state to a journey onset state. At block **1208**, the mobile communication device context processing component **304** enters an observation window for collecting the various inputs over a period of time. The observation window can be configured such that the mobile communication device **104** collects a fixed number of sets as defined by an information collection interval over a time period. Each time a set of inputs is collected a counter is decremented and the process continues until the targeted number of sets on inputs have been collected (e.g., the counter is decremented to a value of "0"). Additionally, if the mobile communication device environment interface **306** is currently not receiving inputs, or otherwise not accepting inputs, the mobile communication device **104** may enter a lower power consumption mode in which one or more components of the mobile communication device **104** become inactive or enter in a low power consumption mode of operation. In turn, the mobile communication device **104** then powers up, or wakes up, at the next information collection interval. The specific information collection interval implemented by the mobile communication device context processing component **304** may be dependent on the granularity of the sensor information, the amount of input information that should be collected for a given transit state, and/or the likelihood of a potential change in transit state. For example, a longer collection interval can be set for transit states in which variations in the set of inputs is not expected (e.g. a highway transit state) to further conserve mobile communication device power.

Upon the expiration of the time window, at decision block **1210**, a test is conducted to determine whether minimum movement criteria have been satisfied based on processing the set on inputs. If the minimum movement criteria have not been satisfied, the mobile communication device **104** is determined to be no longer in motion and the routine **1200** returns to block **1202** to a "non transit" travel state (described above). Because the transit state has changed, the mobile communication device **104** may transmit updated context information to the communication management component **102** indicative of the change in transit state back to a non transit state.

With reference now to FIG. 12B, alternatively, if at decision block **1210** (FIG. 12A), the minimum movement criteria have been satisfied, at block **1212**, the mobile communication device **104** is determined to be in motion and the transit state is changed to a "city/urban" transit state. In an illustrative

US 8,948,784 B2

21

embodiment, the city/urban transit state can correspond to the driving conditions experienced in city or urban areas in which there are frequent stops and wide changes in velocity. Again, because the transit state has changed, the mobile communication device 104 may transmit updated context information to the communication management component 102 indicative of the change in transit state back to a non transit state. At block 1214, the mobile communication device context processing component 304 enters an observation window that defines a set of intervals for collecting multiple sets of inputs over a period of time. In a city/urban transit state, the collection interval for receiving each set of inputs may be configured to be shorter because of the potential for greater variances in the information from set of inputs.

At decision blocks 1216-1218, the mobile communication device context processing component 304 processes the collected input data to determine whether the mobile communication device 104 should remain in its current city/urban transit state, whether the mobile communication device has reached a terminus state, or whether the transit state is more indicative of another transit state typically indicative of highway travel. The collected information can include velocity, bearing, and distance traveled information. Additionally, the collected information can include processed velocity, bearing and distance traveled information, referred to as variance information, that indicate variances and/or rates of variance in the velocity, bearing and distance traveled over each of the collection intervals in the observed time window.

At decision block 1216, a test is conducted to determine criteria indicative of city/urban transit state have been satisfied. The criteria indicative of city/urban transit state can correspond to consideration of variance thresholds for velocity, distance traveled and bearing that are indicative of patterns of city/urban travel. For example, velocity variances for a city/urban transit state may be indicative of a collection of inputs at a time in which a vehicle is stopped (e.g., at a street light) and another collection when the vehicle is traveling at a higher velocity. The thresholds may be determined by observed driving behavior, set by an administrator or set by a particular user. If the criteria indicative of city/urban transit state have not been satisfied, the mobile communication device context processing component 304 determines that the mobile communication device 104 is not likely in a city/urban driving embodiment and moves to block 1226, which will be described in greater detail below. Alternatively, if the criteria indicative of city/urban transit state have been satisfied, the mobile communication device context processing component 304 determines that the mobile communication device 104 should either remain in a city/urban travel state or has reached a terminus. Accordingly, at decision block 1218, a test is conducted to determine whether minimum movement criteria have been satisfied based on processing the set on inputs. If the minimum movement criteria have not been satisfied, the mobile communication device 104 is determined to be no longer in motion and the routine 1200 proceeds to block 1220 (FIG. 12C). Alternatively, if the minimum movement criteria have been satisfied, the routine 1200 returns to block 1212. In this instance, however, the mobile communication device 104 does not need to transmit context information to the communication management component 102 because the transit state has not changed.

With reference now to FIG. 12C, at block 1220, the transit state of the mobile communication device is changed to a "journey terminus" transit state. In an illustrative embodiment, the journey terminus transit state can correspond to the completion of the initial travel. As previously described, because the transit state has changed, the mobile communi-

22

cation device 104 may transmit updated context information to the communication management component 102 indicative of the change in transit state. At block 1222, the mobile communication device context processing component 304 enters an observation window in which a collection interval may be set to a shorter time period because of the expectation for a higher variance between the sets of inputs at each collection interval.

Upon the completion of the observation window, the mobile communication device context processing component 304 will determine whether the mobile communication device has re-entered a travel state (e.g., after a temporary stop) or has entered a non-transitory state (e.g., at home or at the office). Accordingly, at decision block 1224, a test is conducted to determine whether a minimum movement has been detected based on the set on inputs. If minimum movement has not been detected, the mobile communication device 104 is determined to be no longer in motion. Accordingly, the transit state is changed to "non transitory" at block 1202 (FIG. 12A). Alternatively, if a minimum movement has been detected based on the set on inputs, the mobile communication device 104 is determined to be in transit again and the routine 1200 proceed to block 1212 (FIG. 12B) in which the transit state is changed to city/urban transit state. In both decision alternatives, the mobile communication device 104 transmits updated context information to the communication management component 102 indicative of the change in transit state.

With reference now to FIG. 12D, if at decision block 1216 (FIG. 12B), the criteria indicative of city/urban transit state were not satisfied, the mobile communication device context processing component 304 determines that the mobile communication device is a highway transit state, indicative of highway travel. Accordingly, at block 1226, the transit state is changed to a "highway" traveled state and the mobile communication device 104 transmits updated context information to the communication management component 102 indicative of the change in transit state. At block 1228, the mobile communication device context processing component 304 enters an observation window in which a collection interval may be set to a longer time period because of the expectation for a lower variance between the sets of inputs at each collection interval. When the mobile communication device 104 is a highway transit state, it can transition to a terminus state (e.g., indicative of a completion of travel), revert back to a city/urban transit state or remain in a highway transit state. Additionally, in an optional embodiment, the mobile communication device context processing component 304 can determine that the mobile communication device 104 is a flight state indicative of airplane travel. Accordingly, as will be illustrated in FIG. 12D, the mobile communication device context processing component 304 can also reach an "in flight" transit state from the highway traveled state. In all the decision alternatives involving a change in transition state, the mobile communication device 104 transmits updated context information to the communication management component 102 indicative of the change in transit state.

At decision block 1230, a test is conducted to again determine whether criteria indicative of city/urban transit state has been satisfied. If the city criteria indicative of city/urban transit state has been satisfied, the mobile communication device context processing component 304 determines that the mobile communication device 104 should revert back to a city/urban travel state and the routine 1200 returns to block 1212 (FIG. 12B). Alternatively, if the criteria indicative of city/urban transit state has not been satisfied, the mobile communication device context processing component 304

US 8,948,784 B2

23

determines that the mobile communication device **104** should either remain in the highway transit state, move to a journey terminus state, or move to an in-flight state. Accordingly, at decision block **1232**, a test is conducted to determine whether a minimum movement has been detected based on the set on inputs. If the minimum movement has not been detected based on the set on inputs, the mobile communication device **104** is determined to be no longer in motion and the routine **1200** proceeds to block **1220** (FIG. **12C**).

If, however, at decision block **1232**, the minimum movement has been detected based on the set on inputs, at decision block **1234**, a test is then conducted to determine whether criteria indicative of an in-flight transit state has been satisfied. In an illustrative embodiment, criteria indicative of an in-flight transit state can correspond to consideration of variance thresholds for velocity, distance traveled and bearing that are indicative of patterns of air travel. The criteria may also include consideration of information from altimeters or the like. The thresholds may be determined by observed driving behavior, set by an administrator or set by a particular user. If the criteria indicative of an in-flight transit state has not been satisfied, the mobile communication device context processing component **304** determines that the mobile communication device should remain in a highway transit state and the routine **1200** returns to block **1226**.

With reference now to FIG. **12E**, if the criteria indicative of an in-flight transit state has been satisfied, the mobile communication device context processing component **304** determines that the mobile communication device is in flight. Accordingly, at block **1236**, the transit state is changed to an "in flight" transit state. At block **1238**, the mobile communication device context processing component **304** enters an observation window for collecting the various inputs over a period of time, which may be a longer time period. At decision block **1230**, a test is conducted to determine whether is conducted to determine whether one or more in flight distance variances have been exceeded. If the criteria indicative of an in-flight transit state has not been satisfied, the mobile communication device context processing component **304** determines that the mobile communication device **104** should revert back to a highway travel state and the routine **1200** returns to block **1226** (FIG. **12D**). Alternatively, if the criteria indicative of an in-flight transit state has been satisfied, the mobile communication device context processing component **304** determines that the mobile communication device **104** should either remain in the in flight distance transit state or move to a journey terminus state. Accordingly, at decision block **1240**, a test is conducted to determine whether a minimum movement has been detected based on the set on inputs. If the minimum movement has not been detected based on the set on inputs, the mobile communication device **104** is determined to be no longer in motion and the routine **1200** proceeds to block **1220** (FIG. **12C**). Alternatively, if minimum movement has been detected based on the set of inputs, the routine **1200** remains in an in-flight transit state and the routine **1200** returns to block **1236**. In all the decision alternatives involving a change in transit state, the mobile communication device **104** transmits updated context information to the communication management component **102** indicative of the change in transit state.

With reference now to FIG. **14**, a routine **1400** implemented by the mobile communication device context processing component **304** for determining mobile communication device geospatial context information will be described. In an illustrative embodiment, geospatial information may be defined for a geographic region. The geospatial information can include a centroid, which corresponds to an approxima-

24

tion of the geospatial region's central position. The centroid can be defined in terms of a longitude and latitude, x and y coordinates in a grid-type layout or other position coordinates. The geospatial information can also include a minimum radius distance that corresponds to a minimum radius that is within all boundaries of the geospatial region. The geospatial information can further include a maximum radius that corresponds to a maximum radius that is beyond all boundaries of the geospatial region. One skilled in the relevant art will appreciate that the contours of boundaries of a geospatial region can be defined in terms of a radius distance plus bearing from the centroid.

Examples of two geospatial state context algorithm state diagrams were presented with regard to FIGS. **8** and **9**. However, one skilled in the relevant art will appreciate, however, that the specific algorithms and variables described in this disclosure, including the example state diagrams of FIGS. **8** and **9** and in routine **1400** (FIG. **14**) are illustrative in nature and should not be construed as limiting. Accordingly, variations or alternatives may be implemented, such as the removal of one or more transit states, different progression of transit states, and the specific criteria utilized to transition between transit states are within the spirit and scope of the present invention.

With reference to FIG. **14**, at block **1402**, the mobile communication device context processing component **304** obtains the geospatial region definitions from the mobile communication device context data store **308**. The geospatial region definitions may be stored and maintained in a variety of formats and storage media. Additionally, the geospatial region definitions may be prioritized in terms of order of processing by the mobile communication device **104**. At block **1404**, the mobile communication device environment interface **306** begins a collection window in which a geospatial zone definition is evaluated to determine whether the mobile communication device **104** is within the zone. As described above with regard to transit state context assessment algorithms, the observation window can be configured such that the mobile communication device **104** collects a fixed number of sets as defined by an information collection interval over a time period. Each time a set of inputs is collected a counter is decremented and the process continues until the targeted number of sets on inputs have been collected (e.g., the counter is decremented to a value of "0"). Additionally, if the mobile communication device environment interface **306** is currently not receiving inputs, or otherwise not accepting inputs, the mobile communication device **104** may enter a lower power consumption mode in which one or more components of the mobile communication device **104** become inactive or enter in a low power consumption mode of operation. In turn, the mobile communication device **104** then powers up, or wakes up, at the next information collection interval. The specific information collection interval implemented by the mobile communication device context processing component **304** may be dependent on the granularity of the sensor information, the amount of input information that should be collected for a given transit state, and/or the likelihood of a potential change in transit state. For example, a longer collection interval can be set for transit states in which variations in the set of inputs is not expected to further conserve mobile communication device power.

At block **1406**, the mobile communication device context processing component **304** obtains mobile communication location information. In an illustrative embodiment, the mobile communication device environment interface **306** can obtain various sensor information indicative of a location or relative location of the mobile communication device. For

US 8,948,784 B2

25

example, the mobile communication device environment interface **306** can obtain GPS information from an attached GPS component or via wireless communication from another GPS component. In another example, the mobile communication device environment interface **306** can interface with a vehicle's navigation system to obtain location information. In still another example, the mobile communication device environment interface **306** can interface with wireless communication equipment, such as cellular base stations, wireless network nodes (e.g., WiFi and WiMax network nodes), and obtain location information. Additionally, the sensor information can include accelerometers and compass information that facilitates a bearing or direction of the mobile communication device.

In an additional embodiment, and as illustrated in FIG. 9, the mobile communication device environment interface **306** can associate location meta data with known signals from wireless transmitters such that a detection of a signal can provide an indication to the mobile communication device environment interface **306** of the relative location of a mobile communication device **104**. As explained above with regard to FIG. 12, as a mobile communication device **104** travels, signals from specific transmitters are detected when the mobile communication device is within range of the transmitter and no longer detected when the mobile communication device is beyond the range of the transmitter. In embodiments in which the mobile device detects signals from the same wireless transmitters, the mobile communication device environment interface **306** can associate location meta data obtained from another location source (such as a GPS component) to the information indicative of the wireless transmitter, such as a WiFi SSID. Accordingly, in conjunction with the known range of the wireless transmitter, the mobile communication device environment interface **306** can estimate range, associate the location meta data as the approximate location of the mobile communication device **104** for purposes of evaluating context according to geospatial zones.

For purposes of power consumption, the mobile communication device environment interface **306** can monitor various location sensors/inputs. The mobile communication device environment interface **306** can prioritize or rank the location information sources based on various factors, including degree of confidence in the accuracy of the location information, power consumption associated with collecting the location data, financial or service contract issues, and the like. For example, assume that a mobile communication device environment interface **306** has previously stored location information for a known WiFi wireless node in Meta data in the manner described above. Although location information may also be available for an attached GPS component, operation of the GPS component consumes much more device power. Accordingly, the mobile communication device environment interface **306** could choose to receive/use location information from a source with the least power consumption metrics.

With reference again to FIG. 14, at block **1408**, the mobile communication device context processing component **304** calculates the distance and bearing of the current location of the mobile device to the centroid of geospatial zone. At decision block **1410**, a test is conducted to determine whether the distance to the centroid is outside of the maximum radius defined for the geospatial zone. If so, at block **1412**, the mobile device's current context is outside the geospatial zone. The routine **1400** then proceeds to block **1418**, which will be described below.

If at decision block **1410**, the distance to the centroid is not outside the maximum radius, the mobile communication

26

device context processing component **304** will then determine whether the mobile communication device is clearly within the geospatial zone or on the fringe of boundary of the geospatial zone. At decision block **1414**, a test is conducted to determine whether the distance is less than the minimum radius defined for the geospatial zone. If so, at block **1416**, the mobile device's current context is inside the geospatial zone. The routine **1400** then proceeds to block **1418**.

At block **1418**, the mobile communication device **104** must transmit updated context information if a context state has changed. Accordingly, if the mobile communication device has not changed from outside the geospatial zone (block **1412**) or within the geospatial zone (block **1416**), no update will be provided. At block **1420**, the interval for collection of location information and the evaluation of the proximity to the geospatial zone will be decreased (or verified to be at a lower level). In either the case of clearly outside the geospatial zone or clearly within the geospatial zone, the likelihood of a sudden change in context decreases. For example, for a geospatial zone corresponding to an entire city, the frequency in which the mobile device would detect a change corresponding to being detected outside the citywide geospatial zone would likely be low. Accordingly, the collection interval could be adjusted in an effort to mitigate power drain associated with the collection and processing of the sensor information. The routine **1400** then returns to block **1404** for continued collection and processing of the information at the next collection interval.

Turning again to decision block **1414**, if the distance is not less than the minimum radius defined for the geospatial zone, the mobile communication device **104** is likely just within the boundary of the geospatial zone or just outside the boundary of the geospatial zone. Accordingly, the mobile communication device context processing component **304** can then determine with the mobile communication device **104** falls within or just without. If the determined context is a change from a previous context, at block **1422**, the updated context information is transmitted to the communication management component **102**. At block **1424**, the collection interval is increased (or verified to be at a higher level). In the case of neither clearly outside the geospatial zone or clearly within the geospatial zone, the likelihood of a sudden change in context increases. Because of the potential for more likely changes in context, the interval for collection is increased. The routine **1400** then returns to block **1404** for continued collection and processing of the information at the next collection interval.

Communications Management Component Operation

With reference now to FIG. 15, a routine **1500** implemented by the communication processing component **204** to manage communications associated with a mobile communication device **104** will be described. At block **1502**, the mobile communication device interface component **202** receives mobile communication device context information from the mobile communication device **104**. The mobile communication device context information corresponds to processed inputs and is indicative of the mobile communication device context. Although not limiting, examples of illustrative context assessment algorithms/processes were described with regard to FIGS. 5-9, 12, and 14. The context information may require additional processing by the communication management system **102**. As previously discussed, the mobile device communication component **202** may utilize any number of communication channels to receive the context information from the mobile communication device **104**. Additionally, in the event that the context information corresponds to updated context information, especially if the mobile communication device is presently in

US 8,948,784 B2

27

an established communication channel, the mobile device communication component **202** may utilize alternative communication channels.

At block **1504**, the communication processing component **204** obtains mobile communication device profile information from the mobile communication device profile store **210**. The mobile communication profile data store **210** can correspond to a database that identifies different mobile communication device profiles according to different mobile communication device context. For example, a mobile communication device may have a profile for each defined geospatial region and transit state. In this illustrative embodiment, the profile defines the availability for communication channels for all incoming communication channel requests. In an alternative embodiment, the mobile communication device profile data store may maintain additional or supplemental profiles that define availability for various mobile communication device contexts according to particular or identifiable users or groups of users. In this embodiment, the profile information can correspond to a routing table that identifies availability according to context information with an identifiable user.

At block **1506**, the communication processing component **204** determines the communication channel availability according to the profile information obtained at block **1504**. The availability information may be determined upon receipt of the context information and/or may be updated upon receipt of updated context information. Additionally, if a communication channel is not already established, the availability is determined prior to receiving a request for establishing a communication channel from either the mobile communication device **104** or a third party communication device **112**. Still further, the communication management component **102** can also receive additional information from additional third party information sources for processing the profile to determine availability. For example, the communication management system can interface with network resources, such as calendaring applications or interfaces, to receive user calendaring information for an identified period of time. In this example, the calendaring information may be applied to a profile indicating communication channel availability based on categories of appointments (e.g., unavailability for a communication channel based on meetings with a "High Priority" label). Additionally, the calendaring information may be utilized by the communication management system in the selection of communication mitigation options.

At block **1508**, the mobile service provider communication component **208** obtains a notification of a request to establish a communication channel. The notification can include a request to provide authorization for establishing the requested communication channel. Alternatively, the notification can include an indication that the communication channel will be initiated by default unless the communication management system **102** provides an indication that the communication channel should not be established. Additionally, the request to initiate the communication can include additional information regarding the identity or properties of the other party to the requested communication channel and that can be utilized to determine establish appointments for the user of the mobile device. FIG. **16** is a block diagram illustrative of communication channel session state diagram implemented by a communication management component for managing communication channel requested.

Returning to FIG. **15**, at decision block **1510**, the communication processing component **204** performs a test to determine whether the mobile communication device is available. In an illustrative embodiment, if the communication process-

28

ing component **204** has utilized a profile that is applicable to all users, the device availability may be quickly determined based on the prior processing. If, however, the mobile communication device profiles specifies availability based on the identity of some third parties, the communication processing component **204** looks up the specific availability of the user or groups of users.

To facilitate the processing of availability information according to an identified user or groups of users, the communication processing component **204** can utilize a fast lookup routing table that sorts availability by the user's identity, such as phone number or IP address. In this embodiment, the data is sorted by number. As the communication processing component **204** selects a first identifier in the identity, such as the first digit of the phone number, any entries in the table not having the matching numbers collapse. This process would continue for each additional digit that is provided. One skilled in the relevant art will appreciate that individual users may be represented by full identities. Additionally, the routing table may also limit the number of identifiers (e.g., digits) as necessary to distinguish one user from another. For example, if the routing table has four users that have a matching area code and that have different third digits in their phone numbers, the routine table may limit entries to the area code and the first three digits and need not enter the entire area code. Likewise, for groups of users (such as an office), the entries for the entire group may be limited to the identifying information from the organization (such as the first set of digits from an IP address).

With continuing reference to FIG. **15**, if the mobile communication device **104** has been determined to be available, at block **1512**, the mobile service provider communication component **208** transmits an authorization to the mobile switching center **108**. In the event that the routine **1500** is being implemented for an existing communication channel, block **1512**, may be omitted. The routine **1500** returns to block **1502**.

Alternatively, if it has been determined that mobile communication device **104** is not available, at block **1514**, the mobile service provider communication component **208** transmits a rejection or termination message to the mobile switching center **108**. In an illustrative embodiment, the rejection notice may have an immediate effect that prevents the establishment of a communication channel. In another embodiment, the termination notice may include a time to allow for a time period of continued communication prior to termination. The communication processing component **204** may select the time period according to the context information and the immediacy of the determined need for termination. At block **1516**, the communication processing component **206** processes the communication mitigation and the routine **1500** returns to block **1502**.

Communication Mitigation

In an illustrative embodiment, the communication mitigation for a rejected or terminated communication channel can be specified in a mobile communication device profile. As discussed above, the profile may be described with regard to all users, groups of users and/or specific users. In an illustrative embodiment, the communication mitigations can include immediate alternative communication channels/methods, such as a redirection to a voicemail system, a text to speech message processing system, the launching of an SMS service or email service, a redirection to an identified backup caller (such as an operator or an assistant), and the like.

In another embodiment, the communication mitigation corresponds to delayed mitigation techniques that reestablish the requested or existing communication channel upon a determined availability. For example, the user of the mobile

device **104** or the third party communication device **112** can request a callback or new communication channel upon a change of mobile device context that results in the availability of the mobile communication device. The request can include a time component or other information for specifying the expiration of the request or availability for the requested callback. Additionally, the request can include additional information such as calendaring information for scheduling the requested communication channel. Additionally, the calendaring information may be utilized to select which communication mitigation technique may be available.

In still a further embodiment, the communication mitigation techniques can include the specification of immediate actions to be taken by the communication management system **102**. In one example, a user of the mobile communication device **102** can request an override of the determined unavailability of the mobile device. In another example, a third party associated with the communication device **112** can request a page channel to the user of the mobile device **104** to request an override. In a further example, a third party associated with the communication device **112** can request an emergency breakthrough to establish the requested communication channel with the mobile communication device. In still a further example, either the user associated with the mobile communication device **104** or the third party user associated with the communication device **112** can request from several predefined messages to be played to the other users (such as a predetermined message requesting a driver to pull over to be able to take a call). In still a further embodiment, the communication processing component **204** may initiate a timer or counter that specifies a time limit for the user of the mobile device **104** to change the environment prior to the termination of an established communication channel or to allow for the initiation of the established communication channel.

In yet another embodiment of communication channel mitigation techniques, the communication processing component **204** can implement additional notifications to the parties requesting the communication channel or involved in an existing communication channel. The notification can include a specification of the available alternative mitigation options (described above), an explanation of why the communication channel was not authorized or is to be terminated and/or details regarding the timing for the termination of an existing communication channel. For example, when the communication management system **102** routes an incoming call to voicemail as the result of unavailability (e.g., the callee's mobile device is in an "in transit/city" context), an outgoing message may be played to the third party communication device **112**. Different messages (which may but need not be prerecorded by the callee) may be played or generated depending upon whether the context is "in transit/city," "in-transit/highway," "in meeting," "in geospatial zone," "on the phone," etc. Further, the communication management system **102** may output an auto-generated audible message to the caller with information about the expected or estimated future availability of the mobile communication device user. For instance, if imported calendar information indicates that the mobile communication device user is in a meeting, the mitigation component **206** may output an audible message indicating (1) the scheduled end time of, or number of minutes remaining in, the meeting, and (2) the amount of free time until the next meeting. As another example, if the mobile communication device user is in a geospatial zone, the auto-generated message may indicate an estimated amount of time until the mobile communication device is predicted to exit the geospatial zone. The mobile communication device **104** may generate such estimates automatically while in a geospatial

zone as part of the context assessment algorithm, and/or may periodically communicate such estimates (or significant changes thereto) to the communication management system **102**.

Provisioning of Mobile Communication Device Profiles

With reference now to FIG. 17, an illustrative screen display **1700** indicative of a user interface for provisioning mobile communication device profiles will be described. In an illustrative embodiment, the screen display **1700** may be generated by the mobile communication device **104** or a user at a computing device **116**. The provisioning may correspond to administrator level policies set forth by enterprises, service provider or authorities. Additionally, the provisioning may correspond to policies set forth by additional identified users, such as parents. One skilled in the relevant art will appreciate that any number of interfaces may be generated. Additionally, various interfaces may be configured to correspond to the display capabilities and/or requirements of the device generating the display. Additionally, various interfaces may be presented according to the defined context.

With reference to FIG. 17, the screen display **1700** can include a first section **1702** for specifying a profile for particular type of context information. As illustrated in FIG. 17, the section **1702** specifies that availability information is being defined for one or more geospatial zones. The section **1702** may correspond to a number of available context information categories, such as a pick list or a drop down box. As also illustrated in FIG. 17, the screen display can include a map overlay section **1704** for provisioning the boundaries of the geospatial zone. The overlay section can correspond to map information published by the communication management system **172** or additional third parties. For example, the overlay section **1704** may be an existing street map that includes icons indicative of well known or specified establishments. In an illustrative embodiment, the geospatial zones may default to a selection of communication unavailability within the geospatial zone. Alternatively, a user may be able to specify the availability for the geospatial region based on context information or specific users or groups of users.

The screen interface **1700** can further include any number of graphic indicators of geospatial zones **1706**, **1708** that will define the boundaries of the geospatial zones. In an illustrative embodiment, the graphic indicators may be generated via various drawing tools provided on the interface **1700**. In another embodiment, the graphic indicators may be generated by the indication of the coordinates of endpoints and intersections of the boundaries. In still a further embodiment, the interface **1700** may be provisioned with predefined geospatial boundaries that have been provided by the communication management system **102** and/or published by other users.

In another embodiment, the geospatial boundaries can be generated by the entry of location coordinates by the user via a mobile device **104**. In this embodiment, a user can utilize location information, such as GPS information, to indicate the coordinates of geospatial boundaries when the mobile device is at the coordinates. For example, the user can select a control or provide data via the mobile device to indicate the location of the boundaries.

With continued reference to FIG. 17, as previously described, the profile information may also be specified for specific users or groups of users. In accordance with an alternative embodiment, the screen interface can include a representation of users or individuals as a set of icons **1717** that can be manipulated to selection the application of a geospatial zone and selected availability. For example, a user can manipulate the icons **1710** via a drag and drop technique to

US 8,948,784 B2

31

apply a geospatial boundary and associated availability by dropping the icon on the selected geospatial zone or vice versa. The screen interface **1700** may also include a section **1712** in which a user can specify a type of communication mitigation technique to be applied in the event of unavailability. As illustrated in FIG. 17, a communication forward mitigation technique has been specified.

FIG. 18 is a block diagram illustrative of a screen display **1800** of a user interface for obtaining mobile communication device profile information for managing mobile communication device availability based on mobile communication device context information. The screen display **1800** facilitates the specification and management of profiles for individuals or groups of individuals. As illustrated in FIG. 18, the screen display **1800** corresponds to a display of geometric shapes (e.g., circles) that correspond to determined availability based context information. Display objects corresponding to identified individuals can be placed in the geometric shapes to associate the identified individual with the determined availability. Information identified individuals may correspond to information obtained from a network resource, such as a contact list. The association is stored in the mobile device profiles. Additionally, summaries of the associations can be displayed in the screen display **1800**.

Additional Embodiments

In accordance with still another illustrative embodiment, the communications management component **102** may utilize learned behaviors or predictive behaviors to provision the mobile communication device profiles and/or to determine the availability of the mobile communication device **104**. In accordance with this embodiment, communications management component **102** may track various behaviors or mobile communication device usage in the mobile communications device profile data store **210**. For example, the communications management component **102** may track the length of audio conversations between specific users or groups of users. In another example, the communications management component **102** may also track the timing of requests for communication channels on a daily, weekly or monthly basis. In still a further example, the communication management system **102** may track previous determined unavailability to generate a model of availability for users based on time of day or based on events. With continued reference to the example, the communications management component **102** may associate events on a calendar (such as specific reoccurring meetings) with mobile communication device context information that generates a determination of unavailability (such as traveling within a defined geospatial zone). Accordingly, a profile may be provisioned such that the communication processing component **204** may utilize user calendaring function inputs to determine unavailability in advance. Additionally, users may be asked to identify specific, or notable events, that facilitate the learned behavior approach.

In a related embodiment, the communication processing component **204** may also utilize learned behavior to adjust a determination of availability. For example, assume that an identified user typically has audio communications with another user for 20 minutes or greater on a frequent basis. Also assume that at current time, the mobile device is available for audio communication channels. However, the current bearing and velocity will likely place the mobile communication device **104** within a geospatial zone defining unavailability in the next 10 minutes of travel.

In this embodiment, the communication processing component **204** can include learned behaviors to determine whether it would have to likely terminate the communications channel. If so, the communication processing component **204**

32

may adjust the determination of availability in the event that the anticipated time of the communication channel cannot be completed. Thus, in the above example, the communication processing component **204** can determine that the user will likely be entering a geospatial zone based on a current velocity and bearing. Additionally, because of learned behaviors or historical knowledge, the communication processing component **204** can anticipate that the length of the audio communication and will require the communication channel to be terminated when the mobile communications device enters the geospatial zone. Accordingly, the communication processing component **204** may choose, based on its own configurations or a configuration specified by the user, to not authorize the communications channel and offer a selection of communication mitigation approaches.

In another example, the communication processing component **204** can monitor a user's repeated selection of communication mitigation techniques as part of an interactive voice response as a function of an identified user or a specific mobile device context. Accordingly, the communication processing component **204** may update applicable mobile communication device profiles in view of a number of predetermined selections of communication mitigation techniques.

In still another example, the communication processing component **204** can monitor a determination of repeated unavailability according to a time of day or other identified event. Accordingly, the communication processing component **204** may update applicable mobile communication device profiles in view of a number of determinations such that a profile can specify automatically specify unavailability as a function of the determined time of day or event. For example, if a mobile communication device **104** is determined to be unavailable every for two consecutive weeks at the same time, the communication processing component **204** may update a profile to make the unavailability determine a function of time.

In yet a further example, communication processing component **204** can monitor a number of communication requests from a previously unidentified third party communication device **112** or for a communication device that is not associated with a mobile communication device profile. After a number of repeated communication requests, the communication processing component **204** may automatically create a mobile communication device profile or prompt a user for the creation of the mobile communication device profile for such third party communication device. The communication processing component **204** can automatically populate some or all of the aspects of the profile based on the previously monitored activity. Additionally, it can import a template of profile information set by the user, an administrator or a service provider.

In accordance with another embodiment, the context information and/or availability generated by the mobile communication device **104** or the communications management component **102** may be published to additional information sources/repositories, such as network resources. In one example, the mobile device **104** or communications management component **102** may publish a set of the geospatial zones that a user has created. The published geospatial zones may be used by other system users to provision mobile communication device profiles. The published geospatial zones may be utilized to describe/publish the context information that will be used by the communications management component **102** to determine availability.

In another embodiment, the mobile communication device context information may be published to other information sources/repositories to publish the current or past mobile

33

device contexts. In one example, the mobile device context information can be linked with a personal Web page of a user, such that context information (e.g., in transit) is published on the Web page. In another example, the mobile device context information can be linked with a calendaring function to determine whether the user is on schedule. If for example a user remains in a city/urban transit state due to traffic conditions, subsequent appointments may need to be rescheduled or cancelled. Accordingly, a control algorithm may automatically cancel meetings or provide appropriate notifications. In still another embodiment, the determination of a proximity to a geospatial zone or entry into a geospatial zone may be published to a third party source to initiate additional actions (e.g., a communication to security personnel).

In still another embodiment, the mobile communication device availability information may also be published to other information sources/repositories. Similar to the published context information, the mobile device availability information can be linked with a personal Web page of a user, such that availability information (e.g., in transit) is published on the Web page. In another example, the mobile device availability information can be linked with a calendaring function and published to allow for scheduling of current or future events. In still a further example, the published availability information (historical and current) may be used to generate and published a model of availability. In such an embodiment, other users may be presented with opportunities for predictive availability. Still further, the availability information may be filtered according to the authorization to different users or classes of users.

Messaging Formats

Although not limiting, the Tables 1-5 define illustrative messaging formats that could be utilized by the mobile communication device **104** and the communications management component **102** to exchange data. The message formats facilitate communications in a variable sized data communication protocol. One skilled in the relevant art will appreciate, however, that alternative or modified messaging formats may be utilized in accordance with the teachings in the present disclosure. Thus, the disclosed messaging formats are illustrative in nature and should not be construed as limiting.

TABLE 1

Current Context Message									
7							0	Description I	Description II
MSB	6	5	4	3	2	1	LSB		
PDU 1								Protocol Data Unit Identifier	
Telephone no (0)							1	Identification	
Telephone no (1)							0	Field	
IP Address (0)							1		
IP Address (1)							1		
IP Address (2)							1		
IP Address (3)							0		
System ID(0)							1		
System ID(1)							0		
Context Field Identifier							1	Context Header	Context And Conformance Field
M/J	G	T	C	A	A	OR	1	context	
M/J	G	T	C	A	A	OR	0	conformance	
M/J	G	T	C	A	A	OR	1	context	
M/J	G	T	C	A	A	OR	0	conformance	
Data Field Identifier							1	Data Header	Data Field
Latitude (0)							1	Location	
Latitude (3)							0	data	
Longitude (0)							1		
Longitude (1)							0		
Altitude(0)							1	Motion	
Velocity(0)							0	Data	

Current Context Message										
5	7	6	5	4	3	2	1	0	Description I	Description II
	MSB							LSB	Protocol Data Unit Identifier	
PDU 1										
10				Time(0)				1	Date	
				Date(0)				0	Data	
				Message ID Identifier				1		Message
				Message No			0	0		Management

Current Parameters Message										
15								0	Description	Description
	7	6	5	4	3	2	1	LSB	I	II
	MSB								Protocol Data Unit Identifier	
	PDU 2									
20	Telephone no (0)							1	Identification	
	Telephone no (1)							0	Field	
	IP Address (0)							1		
	IP Address (1)							1		
	IP Address (2)							1		
	IP Address (3)							0		
25	Aegis ID(0)							1		
	Aegis ID(1)							0		
	Parameter Field Identifier							1	Parameter	
	Parameter 1 (0)							1	Fields	
	Parameter 1 (3)							0		
	Parameter 1 (0)							1		
30	Parameter 2 (1)							0		
	Parameter 2 (0)							1		
	Parameter 3(0)							0		
	Parameter 4 (0)							1		
	Parameter 5 (0)							0		
	Message ID Identifier							1	Message	
	Message No					0	1	Management		

	Message Acknowledgment								Description I	Description II
	7 MSB	6	5	4	3	2	1	0 LSB	I	II
40									Protocol Data Unit Identifier	
									Identification Field	
	Telephone no (0)								1	
	Telephone no (1)								0	
	IP Address (0)								1	
45	IP Address (1)								1	
	IP Address (2)								1	
	IP Address (3)								0	
	Aegis ID(0)								1	
	Aegis ID(1)								0	
	Message ID Identifier								1	Message Management
50	Message No								1	0

55	Message Affirm/Response										Description	Description
	7							0			I	II
	MSB	6	5	4	3	2	1	LSB				
	PDU 4								Protocol Data Unit Identifier			
60								1			Identification	
								0			Field	
								1				
								1				
								1				
								0				
								1				
65								0				

US 8,948,784 B2

35

TABLE 5

Generic Control Plane Context Management Protocol for Geo Fence Definition									
7	6	5	4	3	2	1	0	Description	Description
PDU 2							LSB	I	II
							Protocol Data Unit Identifier		
Telephone no (0)							1	Identification	
Telephone no (1)							0	Field	
IP Address (0)							1		
IP Address (1)							1		
IP Address (2)							1		
IP Address (3)							0		
Aegis ID(0)							1		
Aegis ID(1)							0		
Geo Fence Identifier							1	Parameter	
Latitude (0)							1	Fields	
Latitude (3)							0		
Longitude (0)							1		
Longitude (3)							0		
Maximum Radius							1		
Minimum Radius							1		
Bearing 1							0		
Radii							1		
Bearing 2							0		
Radii							1		

36

TABLE 5-continued

Generic Control Plane Context Management Protocol for Geo Fence Definition									
7	6	5	4	3	2	1	0	Description	Description
PDU 2							LSB	I	II
							Protocol Data Unit Identifier		
Bearing							0		
							.		
							.		
							.		
Bearing N							0		
Radii							1		
Message ID Identifier							1	Message	
Message No							0	Management	

Illustrative Application

Although not limiting, the Tables 6-10 define illustrative communication management and interaction by the various components of the communication management environment 200. One skilled in the relevant art will appreciate, however, that the present disclosure is in no way limited to the described applications and that alternative applications may be provided in accordance with the teachings in the present disclosure. Thus, the disclosed applications are illustrative in nature and should not be construed as limiting.

TABLE 6

Usage Case Processing					
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Starting Status			Current context = unconditional		
Time	Third Party Communication Device 112	MSC 108	Communication Management Server 102 Server	Mitigation Component 103	Mobile Communication Device 104
Context Change Event			Stop; step 2 Current context = conditional Conditions = mediated		
			Start; step 1 Context specific behavior detected and confirmed Context = F(driving, location, time of day, calendar, user engaged privacy) send context update message to Communication Management Server 102 Server		
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Basic Call Handling	Start; step 1 External call to client initiated	Step 2 MSC 108 receives call establishment request and sends routing request query to Communication Management Component 102	Step3 Communication Management Component 102 responds and informs the MSC 108 that the call should be routed to the Mitigation Component 103 for call mediation since current context = conditional conditions = mediation	Step 4 IVR sequence informs caller that the mobile user is currently unavailable and the following options are available 1. Voice mail 2. Automated call back upon when mobile available 3. Page to request call acceptance 4. immediate emergency call establishment	

US 8,948,784 B2

37

38

TABLE 6-continued

Usage Case Processing		
Context Change Event	Step 9 Current context = conditional Conditions = unconditional	Step 8 Cessation of driving behavior detected and confirmed send context update message to Communication Management Component 102

TABLE 7

Network Originated Driving Usage Cases					
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Starting Status	Current context = unconditional				
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Context Change Event			Stop; step 2 Current context = conditional Conditions = driving	Start; step 1 Driving behavior detected and confirmed send context update message to Communication Management Component 102	
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Basic Call Handling	Start; step 1 External call to client initiated	Step 2 MSC 108 receives call establishment request and sends routing request query to Communication Management Component 102	Step 3 Communication Management Component 102 responds and informs the call should be routed to the Mitigation Component 103 for call mediation since current context = conditional conditions = driving	Step 4 IVR sequence informs caller that the mobile user is driving and the following options are available 5. Voice mail 6. Automated call back upon at journey end 7. Page driver to pull over to take the call 8. immediate emergency call establishment Stop; Step 6 Call terminated via voice mail and caller informed of mobiles driving status	
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Basic Call Handling	Start; step 1 External call to client initiated	Step 2 MSC 108 receives call establishment request and sends routing request query to Communication Management Component 102	Step 3 Communication Management Component 102 responds and informs the call should be routed to the Mitigation Component 103	Step 4 IVR sequence informs caller that the mobile user is driving and the following options are available 9. Voice mail 10. Automated	

US 8,948,784 B2

39

40

TABLE 7-continued

Network Originated Driving Usage Cases					
		Component 102	Component 103 for call mediation since current context = conditional conditions = driving	call back upon at journey end 11. Page driver to pull over to take the call 12. Immediate emergency call establishment Step 6 Call terminated via IVR caller informed of mobiles driving status callers call back request acknowledged call back request sent to Communication Management Component 102	
	Step 5 Third Party Communication Device 112 requests automated call back upon journey termination		Step 7 Aegis server queues pending call request		
Context Change Event			Step 9 Current context = conditional Conditions = unconditional		Step 8 Cessation of driving behavior detected and confirmed send context update message to Communication Management Component 102 Stop; step 11 Mobile connected to caller
	Stop; step 11 Caller connected to mobile		Step 10 Communication Management Component 102 initiates bi-lateral call establishment request to mobile and originating caller Id		
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Basic Call Handling	Start; step 1 External call to client initiated	Step 2 MSC 108 receives call establishment request and sends routing request query to Communication Management Component 102	Step 3 Communication Management Component 102 responds and informs the call should be routed to the Mitigation Component 103 for call mediation since current context = conditional conditions = driving	Step 4 IVR sequence informs caller that the mobile user is driving and the following options are available 13. Voice mail 14. Automated call back upon at journey end 15. Page driver to pull over to take the call 16. Immediate emergency call establishment	
	Step 5 Third Party Communication Device 112 requests page to request driver to pull over		Step 7 Aegis server sends pull over page request to Mobile Communication Device 104	Step 6 Call establishment request is placed on hold, caller informed pull over request is in progress Pull over page request sent to Communication Management Component 102	Step 8 Mobile Communication Device 104 rings in unique manner (ring tone) to identify driving pull over request and call on hold
Context Change Event			Step 10 Current context = conditional		Step 9 Cessation of driving behavior

US 8,948,784 B2

41

42

TABLE 7-continued

Network Originated Driving Usage Cases					
			Conditions = unconditional		detected and confirmed send context update message to Communication Management Component 102
	Stop; step 12 Caller connected to mobile		Step 11 Communication Management Component 102 completes pending call establishment request to mobile from originating caller Id		Stop; step 12 Mobile connected to caller
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Basic Call Handling	Start; step 1 External call to client initiated	Step 2 MSC 108 receives call establishment request and sends routing request query to Communication Management Component 102	Step 3 Communication Management Component 102 responds and informs the call should be routed to the Mitigation Component 103 for call mediation since current context = conditional conditions = driving	Step 4 IVR sequence informs caller that the mobile user is driving and the following options are available 17. Voice mail 18. Automated call back upon at journey end 19. Page driver to pull over to take the call 20. Immediate emergency call establishment	
	Step 5 Third Party Communication Device 112 requests immediate emergency call establishment		Step 7 Communication Management Component 102 completes pending call establishment request to mobile from originating caller Id	Step 6 Call establishment request is placed on hold Immediate call establishment request sent to Communication Management Component 102	Step 8 Mobile Communication Device 104 rings in unique manner (ring tone) to identify emergency connection request and call on hold
	Stop; step 10 Caller connected to mobile		Step 9 Current context = conditional Conditions = conditional Conformance = non compliant		Stop; step 10 Mobile connected to caller

TABLE 8

Mobile Communication Device 104 Orientated Driving Usage Cases					
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Starting Status	Step 3 Called party terminates and establishes call	Step 2 MSC 108 routes call establishment request	Current context = unconditional Step 4 Communication Management Component 102 records Current context = unconditional & call in progress		Start; step 1 Mobile Communication Device 104 initiates call establishment request

US 8,948,784 B2

43

44

TABLE 8-continued

Mobile Communication Device 104 Orientated Driving Usage Cases					
Context Change Event			Step 6 Current context = conditional Conditions = driving & call in progress Conformance = non compliant		Step 5 Driving behavior detected and confirmed send context update message to Communication Management Component 102
Basic Call Handling	Step 8, stop Call cessation request received from Communication Management Component 102		Step 7 Communication Management Component 102 responds and injects audio driving notification into call pathway for both parties Request voluntary call termination Conditions = driving & call in progress Conformance = non compliant Compliance timer set for max call duration		Step 8, stop Call cessation request received from Communication Management Component 102
Optional Call Handling	Step 10, stop Audio call termination received Call terminates		Step 9, Optional Compliance timer expires Communication Management Component 102 injects audio call termination pending warning Communication Management Component 102 terminates call between Mobile Communication Device 104 and caller		Step 10, stop Audio call termination received Call terminates
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104

TABLE 9

Geospatial Usage Cases					
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Starting Status			Current context = unconditional		
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Context Change Event			Stop; step 2 Current context = conditional Conditions = geo zone		Start; step 1 Geo-Zone detected and confirmed that Mobile Communication Device 104 is contained within a defined geo zone send context update message to Communication Management

US 8,948,784 B2

45

46

TABLE 9-continued

Geospatial Usage Cases					
					Component 102
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Basic Call Handling	Start; step 1 External call to client initiated	Step 2 MSC 108 receives call establishment request and sends routing request query to Communication Management Component 102	Step3 Communication Management Component 102 examines the caller ID to determine if the call can be immediately connected or if the call should be mediated If mediation is selected the Communication Management Component 102 routes the call establishment request call to the Mitigation Component 103 current context = conditional conditions = geo zone	Step 4 IVR sequence informs caller that the mobile user is currently unavailable and the following options are available 1. Voice mail 2. Automated call back upon exit from geo-zone 3. Immediate emergency call establishment	
	Step 5 Third Party Communication Device 112 requests voice mail			Stop; Step 6 Call terminated via voice mail and caller informed of mobiles unavailable status	
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Basic Call Handling	Start; step 1 External call to client initiated	Step 2 MSC 108 receives call establishment request and sends routing request query to Communication Management Component 102	Step3 Communication Management Component 102 examines caller ID to determine if the call can be immediately connected or if the call should be mediated If mediation is required the Communication Management Component 102 routes the call establishment request call to the Mitigation Component 103 current context = conditional conditions = geo zone	Step 4 IVR sequence informs caller that the mobile user is driving and the following options are available 1) Voice mail 2) Automated call back exit from geo zone 3) Immediate emergency call establishment	
	Step 5 Third Party Communication Device 112 requests automated call back mobile availability		Step 7 Aegis server queues pending call request	Step 6 Call terminated via IVR caller informed of mobiles clients location limitations status callers call back request acknowledged call back request sent to	

US 8,948,784 B2

47

48

TABLE 9-continued

Geospatial Usage Cases					
Context Change Event			Step 9 Current context = conditional Conditions = unconditional	Communication Management Component 102	Step 8 Geo-zone vacated, event detected and confirmed send context update message to Communication Management Component 102
	Stop; step 11 Caller connected to mobile		Step 10 Communication Management Component 102 initiates bi-lateral call establishment request to mobile and originating caller Id		Stop; step 11 Mobile connected to caller
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Basic Call Handling	Start; step 1 External call to client initiated	Step 2 MSC 108 receives call establishment request and sends routing request query to Communication Management Component 102	Step 3 Communication Management Component 102 examines the caller ID to determine if the call can be immediately connected or if the call should be mediated If mediation is selected the Communication Management Component 102 routes the call establishment request call to the Mitigation Component 103 current context = conditional conditions = geo zone	Step 4 IVR sequence informs caller that the mobile user is unable to accept calls at the current location and the following options are available 1) Voice mail 2) Automated call back upon at journey end 3) Immediate emergency call establishment	
	Step 5 Third Party Communication Device 112 requests immediate emergency call establishment		Step 7 Communication Management Component 102 completes pending call establishment request to mobile from originating caller Id	Step 6 Call establishment request is placed on hold Immediate call establishment request sent to Communication Management Component 102	Step 8 Mobile Communication Device 104 rings in unique manner (ring tone) to identify connection request and call on hold
	Stop; step 10 Caller connected to mobile		Step 9 Current context = conditional Conditions = conditional Conformance = non compliant		Stop; step 10 Mobile connected to caller

US 8,948,784 B2

49

50

TABLE 10

Temporal & Calendar Meeting					
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Starting Status			Current context = unconditional		
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Context Change Event			Stop; step 2 Current context = conditional Conditions = Private time		Start; step 1 Calendared meeting or private time zone detected send context update message to Communication Management Component 102
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Basic Call Handling	Start; step 1 External call to client initiated	Step 2 MSC 108 receives call establishment request and sends routing request query to Communication Management Component 102	Step3 Communication Management Component 102 examines the caller ID to determine if the call can be immediately connected or if the call should be mediated If mediation is selected the Communication Management Component 102 routes the call establishment request call to the Mitigation Component 103 current context = conditional conditions = private time	Step 4 IVR sequence informs caller that the mobile user is currently unavailable and the following options are available 1. Voice mail 2. Automated call back upon availability 3. Immediate emergency call establishment	
	Step 5 Third Party Communication Device 112 requests voice mail			Stop; Step 6 Call terminated via voice mail and caller informed of mobiles unavailable status	
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Basic Call Handling	Start; step 1 External call to client initiated	Step 2 MSC 108 receives call establishment request and sends routing request query to Communication Management Component 102	Step3 Communication Management Component 102 examines caller ID to determine if the call can be immediately connected or if the call should be mediated If mediation is required the Communication Management Component 102	Step 4 IVR sequence informs caller that the mobile user is not available and the following options are available 1) Voice mail 2) Automated call back when mobile is available 3) Immediate emergency call establishment	

US 8,948,784 B2

51

52

TABLE 10-continued

Temporal & Calendar Meeting					
Context Change Event	Step 5 Third Party Communication Device 112 requests automated call back mobile availability		routes the call establishment request call to the Mitigation Component 103 current context = conditional conditions = private time	Step 6 Call terminated via IVR caller informed of mobiles clients not available status caller's call back request acknowledged call back request sent to Communication Management Component 102	
			Step 7 Aegis server queues pending call request		
			Step 9 Current context = conditional Conditions = unconditional		
	Stop; step 11 Caller connected to mobile		Step 10 Communication Management Component 102 initiates bi-lateral call establishment request to mobile and originating caller Id	Step 8 Private time finished, event detected and confirmed send context update message to Communication Management Component 102 Stop; step 11 Mobile connected to caller	
Time	Third Party Communication Device 112	MSC 108	Communication Management Component 102	Mitigation Component 103	Mobile Communication Device 104
Basic Call Handling	Start; step 1 External call to client initiated	Step 2 MSC 108 receives call establishment request and sends routing request query to Communication Management Component 102	Step 3 Communication Management Component 102 examines the caller ID to determine if the call can be immediately connected or if the call should be mediated If mediation is selected the Communication Management Component 102 routes the call establishment request call to the Mitigation Component 103 current context = conditional conditions = private time	Step 4 IVR sequence informs caller that the mobile user is unable to accept calls at this time and the following options are available 1) Voice mail 2) Automated call back upon at journey end 3) Immediate emergency call establishment	
	Step 5 Third Party Communication Device 112 requests immediate		Step 7 Communication Management Component 102 completes pending	Step 6 Call establishment request is placed on hold Immediate call	Step 8 Mobile Communication Device 104 rings in unique

TABLE 10-continued

Temporal & Calendar Meeting			
emergency call establishment	call establishment request to mobile from originating caller Id	establishment request sent to Communication Management Component 102	manner (ring tone) to identify connection request and call on hold
Stop; step 10 Caller connected to mobile	Step 9 Current context = conditional Conditions = conditional Conformance = non compliant		Stop; step 10 Mobile connected to caller

15

While illustrative embodiments have been disclosed and discussed, one skilled in the relevant art will appreciate that additional or alternative embodiments may be implemented within the spirit and scope of the present invention. Additionally, although many embodiments have been indicated as illustrative, one skilled in the relevant art will appreciate that the illustrative embodiments do not need to be combined or implemented together. As such, some illustrative embodiments do not need to be utilized or implemented in accordance with scope of variations to the present disclosure.

Conditional language, such as, among others, “can,” “could,” “might,” or “may,” unless specifically stated otherwise, or otherwise understood within the context as used, is generally intended to convey that certain embodiments include, while other embodiments do not include, certain features, elements and/or steps. Thus, such conditional language is not generally intended to imply that features, elements and/or steps are in any way required for one or more embodiments or that one or more embodiments necessarily include logic for deciding, with or without user input or prompting, whether these features, elements and/or steps are included or are to be performed in any particular embodiment.

Any process descriptions, elements, or blocks in the flow diagrams described herein and/or depicted in the attached figures should be understood as potentially representing modules, segments, or portions of code which include one or more executable instructions for implementing specific logical functions or steps in the process. Alternate implementations are included within the scope of the embodiments described herein in which elements or functions may be deleted, executed out of order from that shown or discussed, including substantially concurrently or in reverse order, depending on the functionality involved, as would be understood by those skilled in the art. It will further be appreciated that the data and/or components described above may be stored on a computer-readable medium and loaded into memory of the computing device using a drive mechanism associated with a computer readable storing the computer executable components such as a CD-ROM, DVD-ROM, or network interface further, the component and/or data can be included in a single device or distributed in any manner. Accordingly, general purpose computing devices may be configured to implement the processes, algorithms and methodology of the present disclosure with the processing and/or execution of the various data and/or components described above.

It should be emphasized that many variations and modifications may be made to the above-described embodiments, the elements of which are to be understood as being among other acceptable examples. All such modifications and varia-

tions are intended to be included herein within the scope of this disclosure and protected by the following claims.

What is claimed is:

1. A computer-implemented method of assessing whether a mobile device is in a geospatial area, the method comprising: receiving, at a mobile device, a representation of a non-circular geospatial zone; causing storage of the representation of the non-circular geospatial zone in a memory of the mobile device; determining, based at least in part on the non-circular geospatial zone, an outer circular boundary entirely encompassing the non-circular geospatial zone, wherein the outer circular boundary is defined by at least a centroid of the non-circular geospatial zone and a maximum radius; determining, based at least in part on the non-circular geospatial zone, an inner circular boundary entirely encompassed within the non-circular geospatial zone, wherein the inner circular boundary is defined by at least the centroid of the non-circular geospatial zone and a minimum radius; computing a current distance of the mobile device from the centroid of the non-circular geospatial zone; and in response to a determination that the computed current distance both exceeds the minimum radius and does not exceed the maximum radius, utilizing the non-circular geospatial zone to determine a context of the mobile device.
2. The computer-implemented method of claim 1 further comprising: computing an updated current distance of the mobile device from the centroid of the non-circular geospatial zone; and in response to a determination that the updated current distance does not exceed the minimum radius, determining that the mobile device is within the geospatial zone.
3. The computer-implemented method of claim 2, where no context notification is transmitted from the mobile device while the mobile device remains within the geospatial zone.
4. The computer-implemented method of claim 1 further comprising: computing an updated current distance of the mobile device from the centroid of the non-circular geospatial zone; and in response to a determination that the updated current distance exceeds the maximum radius, determining that the mobile device is outside of the geospatial zone.
5. The computer-implemented method of claim 4 further comprising transmitting a context notification to a call processing entity reflecting that the mobile device is outside of the non-circular geospatial zone.

US 8,948,784 B2

55

6. The computer-implemented method of Claim 1, wherein management of requests for communication including the mobile device is defined in terms of a transmitted context state.

7. The computer-implemented method of claim 1, wherein the current distance of the mobile device from the centroid of the non-circular geospatial zone is computed based at least in part on sensor-based location data of the mobile device.

8. The computer-implemented method of claim 7, wherein the sensor-based location data corresponds to global positioning system data.

9. A system comprising:

a data store including a representation of a non-circular geospatial zone;

a processor associated with a mobile device and configured with computer-executable instructions that, when executed by the processor, cause the processor to: retrieve the representation of the non-circular geospatial zone;

determine, based at least in part on the non-circular geospatial zone, an outer circular boundary entirely encompassing the non-circular geospatial zone, wherein the outer circular boundary is defined by at least a centroid of the non-circular geospatial zone and a maximum radius;

determine based at least in part on the non-circular geospatial zone, an inner circular boundary entirely encompassed within the non-circular geospatial zone, wherein the inner circular boundary is defined by at least the centroid of the non-circular geospatial zone and a minimum radius;

compute a current distance of the mobile device from the centroid of the non-circular geospatial zone;

in response to a determination that the current distance both exceeds the minimum radius and does not exceed the maximum radius, utilize the non-circular geospatial zone to determine a context of the mobile device.

10. The system claim 9, wherein the current distance of the mobile device from the centroid of the non-circular geospatial zone is computed based at least in part on sensor-based location data of the mobile device.

11. The system of claim 10, wherein the sensor-based location data corresponds to location data previously associated with a known location.

12. The system of claim 11, wherein the known location is a wireless node, and wherein the computer-executable instructions further cause the processor to:

detect a signal from a transmitter, wherein the signal includes a transmitter identifier; and

recall previously stored location information according to the transmitter identifier; and

wherein the current distance of the mobile device from the centroid of the non-circular geospatial zone is computed based at least in part on the previously stored location information.

13. The system claim 9, wherein the computer-executable instructions further cause the processor to:

compute an updated current distance of the mobile device from the centroid of the non-circular geospatial zone; and

in response to a determination that the updated current distance does not exceed the minimum radius, determine that the mobile device is within the non-circular geospatial zone.

14. The system claim 13, where no context notification is transmitted from the mobile device while the mobile device remains within the non-circular geospatial zone.

56

15. The system claim 9, wherein the computer-executable instructions further cause the processor to:

compute an updated current distance of the mobile device from the centroid of the non-circular geospatial zone; and

in response to a determination that the updated current distance exceeds the maximum radius, determine that the mobile device is outside of the non-circular geospatial zone.

16. The system of claim 15 further comprising transmitting a context notification to a call processing entity reflecting that the mobile device is outside of the non-circular geospatial zone.

17. The system of claim 9, wherein the computer-executable instructions further cause the processor to modify a length of time until the mobile device reassesses whether it is located in the non-circular geospatial zone, and wherein the length of time is based at least partially on the current distance of the mobile device from the centroid of the non-circular geospatial zone.

18. The system of claim 9, wherein said mobile device is associated with a bearing and a velocity and wherein the length of time is further based at least partially upon a determination, based on the bearing and velocity, of whether a future position associated with the mobile device will intersect an outer boundary of the non-circular geospatial zone.

19. A non-transitory, computer-readable medium including computer-executable instructions comprising:

first computer-executable instructions that, when executed by a mobile device, cause the mobile device to receive a representation of a non-circular geospatial zone and to maintain within a memory of the mobile device the representation of the non-circular geospatial zone;

second computer-executable instructions that, when executed by the mobile device, cause the mobile device to determine, based at least in part on the non-circular geospatial zone, an outer circular boundary entirely encompassing the non-circular geospatial zone and an inner circular boundary entirely encompassed within the non-circular geospatial zone, wherein the outer circular boundary is defined by at least a centroid of the non-circular geospatial zone and a maximum radius, and wherein the inner circular boundary is defined by at least the centroid of the non-circular geospatial zone and a minimum radius; and

third computer-executable instructions that, when executed by the mobile device, cause the mobile device to compute a current distance of the mobile device from the centroid of the non-circular geospatial zone and, in response to a determination that the current distance both exceeds the minimum radius and does not exceed the maximum radius, utilize the non-circular geospatial zone to determine a context of the mobile device.

20. The non-transitory, computer-readable medium claim 19, wherein the computer-executable instructions further cause the processor to:

compute an updated current distance of the mobile device from the centroid of the non-circular geospatial zone; and

in response to a determination that the updated current distance does not exceed the minimum radius, determine that the mobile device is within the non-circular geospatial zone.

21. The non-transitory, computer-readable medium claim 20, wherein no context notification is transmitted from the mobile device while the mobile device remains within the non-circular geospatial zone.

US 8,948,784 B2

57

58

22. The non-transitory, computer-readable medium claim 19, wherein the third computer-executable instructions further cause the mobile device to:

compute an updated current distance of the mobile device from the centroid of the non-circular geospatial zone; 5
and

in response to a determination that the updated current distance exceeds the maximum radius, determine that the mobile device is outside of the non-circular geospatial zone. 10

23. The non-transitory, computer-readable medium claim 22, wherein the third computer-executable instructions further cause the mobile device to transmit a context notification to a call processing entity reflecting that the mobile device is outside of the non-circular geospatial zone. 15

24. The non-transitory, computer-readable medium claim 19, wherein the third computer-executable instructions further cause the mobile device to modify a length of time until the mobile device reassesses whether it is located in the non-circular geospatial zone, and wherein the length of time is based at least partially on the current distance of the mobile device from the centroid of the non-circular geospatial zone. 20

* * * * *